




Sealing Nut (7)


Seal (6)




Clamp Ring (5)



Gasket (4)




Screw Nut (3)




Connector (2)



O-Ring (I)



Pin Assignments Front View

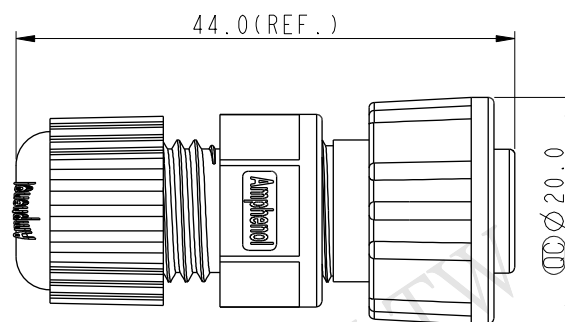

- *  Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * O-Ring: EPDM, Black
- * Screw Nut: Nylon+GF, Black
- * Gasket: EPDM, Black
- * Clamp Ring: Nylon, Black
- * Seal: EPDM, Black
- * Sealing Nut: Nylon, Black
- * Seal For Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * One Set Unassembled In One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)

UNIT:mm				TITLE Standard Assy Screw 2Pin F Conn F Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BB-02BFFA-SL7001		DRAWN BY Vicky		DATE 2014-11-04				
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±				SCALE 3:2		SIZE A4			SHEET 1 OF 1		DWG NO BB-02BFFA-SL7001		CHECKED BY Sam		DATE 2014-11-04		
				REV. B		WC-REV. A.4			(QC): Inspection item		CUSTOMER ALTW		APPROVED BY Rita		DATE 2014-11-04		