
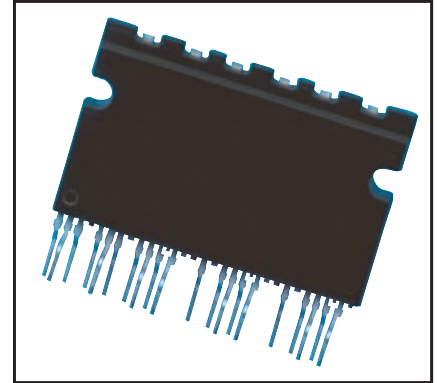


### Intellimod™ Module Single-In-Line Intelligent Power Module 3 Amperes/600 Volts

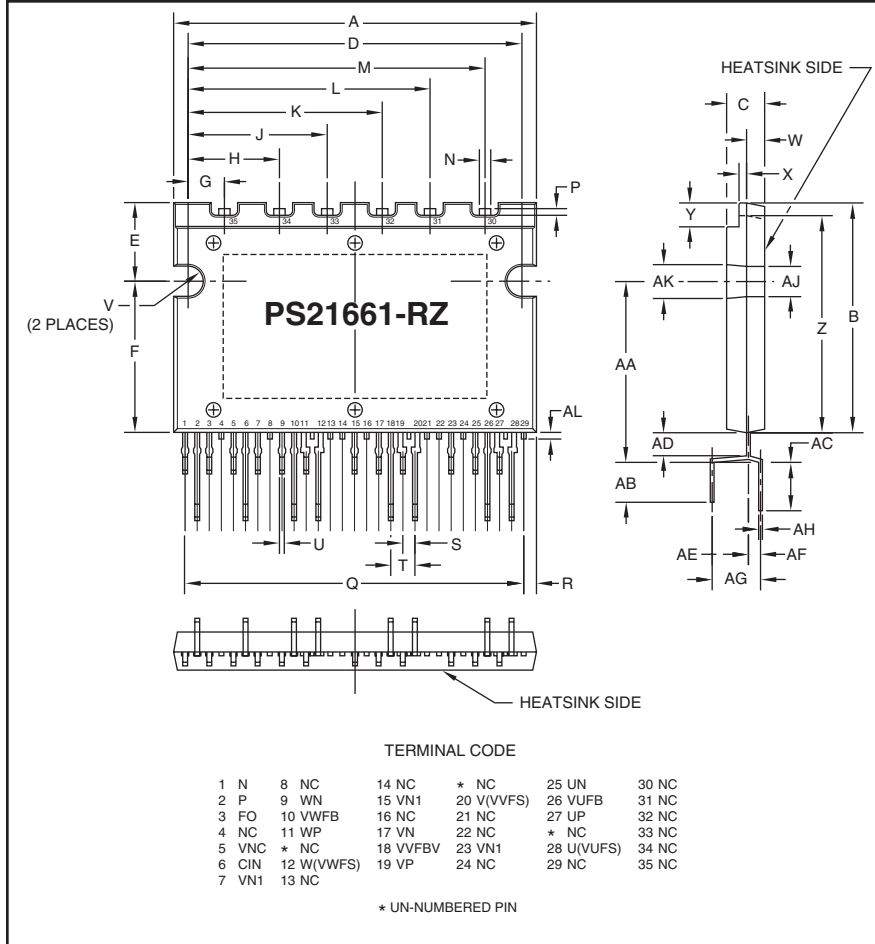

#### Description:

SIP-IPMs are intelligent power modules that integrate power devices, drivers, and protection circuitry in an ultra compact single-in-line transfer-mold package for use in driving small three phase motors. Use of 5th generation IGBTs, SIP packaging, and application specific HVICs allow the designer to reduce inverter size and overall design time.

#### Features:

- Compact Packages
- Single Power Supply
- Integrated HVICs
- Direct Connection to CPU

#### Applications:

- Washing Machines
- Refrigerators
- Air Conditioners
- Small Servo Motors
- Small Motor Control

#### Ordering Information:


PS21661-RZ is a 600V, 3 Ampere SIP Intelligent Power Module.

#### Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	1.50	38.0
B	0.94	24.0
C	0.16	4.0
D	1.38	35.0
E	0.33	8.5
F	0.61	15.5
G	0.15	3.8
H	0.38	9.6
J	0.57	14.6
K	0.80	20.4
L	1.00	25.4
M	1.23	31.2
N	0.047	1.2
P	0.028	0.7
Q	1.39	35.28
R	0.048	1.22
S	0.05	1.27
T	0.10	2.54

Dimensions	Inches	Millimeters
U	0.02	0.5
V	0.06	1.6
W	0.07	1.9
X	0.03	0.8
Y	0.11	2.7
Z	0.90	22.8
AA	0.75	19.0
AB	0.17	4.2
AC	0.20	5.2
AD	0.09	2.4
AE	0.15	3.81
AF	0.05	1.27
AG	0.20	5.08
AH	0.016	0.4
AJ	0.13	3.3
AK	0.14	3.6
AL	0.28	0.7

**PS21661-RZ-FR**  
**Intellimod™ Module**  
**Single-In-Line Intelligent Power Module**  
 3 Amperes/600 Volts

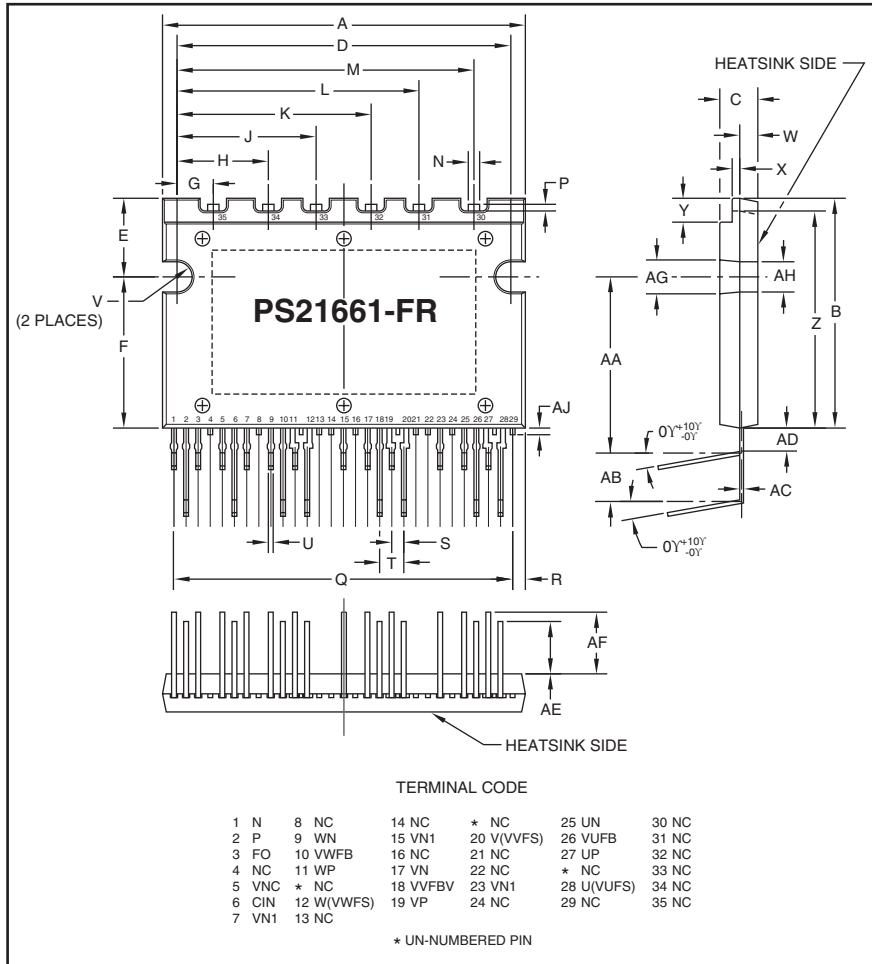

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	1.50	38.0
B	0.94	24.0
C	0.16	4.0
D	1.38	35.0
E	0.33	8.5
F	0.61	15.5
G	0.15	3.8
H	0.38	9.6
J	0.57	14.6
K	0.80	20.4
L	1.00	25.4
M	1.23	31.2
N	0.047	1.2
P	0.028	0.7
Q	1.39	35.28
R	0.048	1.22
S	0.05	1.27

Dimensions	Inches	Millimeters
T	0.10	2.54
U	0.02	0.5
V	0.06	1.6
W	0.07	1.9
X	0.03	0.8
Y	0.11	2.7
Z	0.90	22.8
AA	0.71	18.1
AB	0.20	5.08
AC	0.016	0.4
AD	0.09	2.4
AE	0.22	5.5
AF	0.26	6.5
AG	0.14	3.6
AH	0.13	3.3
AJ	0.028	0.7

**PS21661-RZ/-FR**  
**Intellimod™ Module**  
**Single-In-Line Intelligent Power Module**  
 3 Amperes/600 Volts

## Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PS21661-RZ/-FR	Units
Power Device Junction Temperature*	$T_j$	-20 to 125	$^\circ\text{C}$
Heatsink Operation Temperature (See $T_f$ Measurement Point Illustration)	$T_f$	-20 to 100	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to 125	$^\circ\text{C}$
Mounting Torque, M3 Mounting Screws	—	7	in-lb
Module Weight (Typical)	—	10	Grams
Self-protection Supply Voltage Limit (Short Circuit Protection Capability)**	$V_{CC(prot.)}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal, Connection Pins to Heatsink Plate	$V_{ISO}$	2500	Volts

\*The maximum junction temperature rating of the power chips integrated within the SIP-IPM is  $150^\circ\text{C}$  ( $@T_f \leq 100^\circ\text{C}$ ). However, to ensure safe operation of the SIP-IPM, the average junction temperature should be limited to  $T_{j(avg)} \leq 125^\circ\text{C}$  ( $@T_f \leq 100^\circ\text{C}$ ).

\*\* $V_D = 13.5 \sim 16.5\text{V}$ , Inverter Part,  $T_j = 125^\circ\text{C}$ , Non-repetitive, Less than  $2\mu\text{s}$


## IGBT Inverter Sector

Collector-Emitter Voltage	$V_{CES}$	600	Volts
Collector Current ( $T_f = 25^\circ\text{C}$ )	$\pm I_C$	3	Amperes
Peak Collector Current ( $T_f = 25^\circ\text{C}$ , $t_w \leq 1\text{ms}$ )	$\pm I_{CP}$	6	Amperes
Supply Voltage (Applied between P - N)	$V_{CC}$	450	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{CC(surge)}$	500	Volts
Collector Dissipation ( $T_f = 25^\circ\text{C}$ , per 1 Chip)	$P_C$	11.1	Watts

## Control Sector

Supply Voltage (Applied between $V_{N1}-V_{NC}$ )	$V_D$	20	Volts
Supply Voltage (Applied between $V_{UFB-U}(V_{UFS})$ , $V_{VFB-V}(V_{VFS})$ , $V_{WFB-W}(V_{WFS})$ )	$V_{DB}$	20	Volts
Input Voltage (Applied between $U_P, V_P, W_P-V_{NC}$ , $U_N, V_N, W_N-V_{NC}$ )	$V_{IN}$	$-0.5 \sim V_D$	Volts
Fault Output Supply Voltage (Applied between $F_O-V_{NC}$ )	$V_{FO}$	$-0.5 \sim V_D$	Volts
Fault Output Current (Sink Current at $F_O$ Terminal)	$I_{FO}$	10	mA
Current Sensing Input Voltage (Applied between $C_{IN}-V_{NC}$ )	$V_{SC}$	$-0.5 \sim V_D$	Volts

$T_f$  Measurement Point

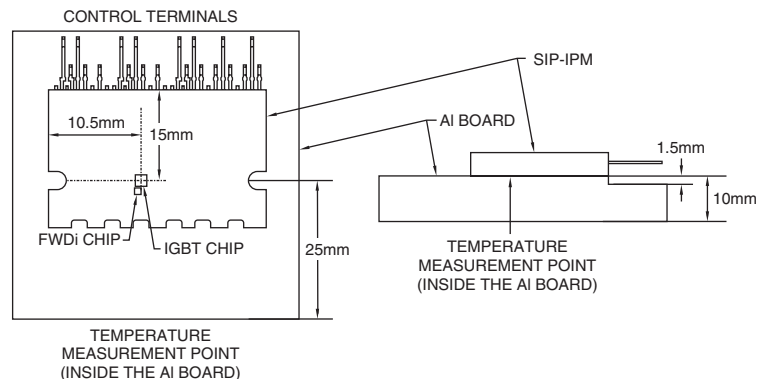

PS21661-RZ-FR  
 Intellimod™ Module  
 Single-In-Line Intelligent Power Module  
 3 Amperes/600 Volts

## Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, T_j = 125^\circ\text{C}$	—	—	10	mA
Diode Forward Voltage	$V_{EC}$	$T_j = 25^\circ\text{C}, -I_C = 3\text{A}, V_{IN} = 0\text{V}$	—	1.55	2.00	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3\text{A}, T_j = 25^\circ\text{C}, V_D = V_{DB} = 15\text{V}, V_{IN} = 5\text{V}$	—	1.60	2.15	Volts
		$I_C = 3\text{A}, T_j = 125^\circ\text{C}, V_D = V_{DB} = 15\text{V}, V_{IN} = 5\text{V}$	—	1.70	2.30	Volts
Inductive Load Switching Times	$t_{on}$		0.50	0.85	1.25	$\mu\text{s}$
	$t_{rr}$	$V_{CC} = 300\text{V}, V_D = V_{DB} = 15\text{V},$	—	0.20	—	$\mu\text{s}$
	$t_{C(on)}$	$I_C = 3\text{A}, T_j = 125^\circ\text{C}, V_{IN} = 0 \Leftrightarrow 5\text{V},$	—	0.35	0.55	$\mu\text{s}$
	$t_{off}$	Inductive Load (Upper-Lower Arm)	—	1.00	1.50	$\mu\text{s}$
	$t_{C(off)}$		—	0.55	1.10	$\mu\text{s}$

## Control Sector

Supply Voltage	$V_D$	Applied between $V_{N1}-V_{NC}$	13.5	15.0	16.5	Volts
	$V_{DB}$	Applied between $V_{UFB}-V_{UFS},$ $V_{VFB}-V_{VFS}, V_{WFB}-V_{WFS}$	13.0	15.0	18.5	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}, V_{IN} = 0\text{V},$ Total of $V_{N1}-V_{NC}$ (U, V, W)	—	—	3.60	mA
		$V_D = 15\text{V}, V_{IN} = 5\text{V},$ Total of $V_{N1}-V_{NC}$ (U, V, W)	—	—	3.60	mA
	$I_{DB}$	$V_{DB} = 15\text{V}, V_{IN} = 0\text{V},$ $V_{UFB}-U(V_{UFS}), V_{VFB}-V(V_{VFS}), V_{WFB}-W(V_{WFS})$	—	—	0.35	mA
		$V_{DB} = 15\text{V}, V_{IN} = 5\text{V},$ $V_{UFB}-U(V_{UFS}), V_{VFB}-V(V_{VFS}), V_{WFB}-W(V_{WFS})$	—	—	0.35	mA
Fault Output Voltage	$V_{FOH}$	$V_{SC} = 0\text{V}, F_O$ Circuit: 1k $\Omega$ to 5V Pull-up	4.9	—	—	Volts
	$V_{FOL}$	$V_{SC} = 1\text{V}, I_{FO} = -10\text{mA}$	—	—	0.95	Volts
Input Current	$I_{IN}$	$V_{IN} = 5\text{V}$	0.70	1.06	1.50	mA
Short-Circuit Trip Level*	$V_{SC(ref)}$	$T_j = 25^\circ\text{C}, V_D = 15\text{V}$	0.43	0.48	0.53	Volts
Supply Circuit Undervoltage	$UV_{DBt}$	Trip Level, $T_j \leq 125^\circ\text{C}$	10.0	—	12.0	Volts
	$UV_{DBr}$	Reset Level, $T_j \leq 125^\circ\text{C}$	10.5	—	12.5	Volts
	$UV_{Dt}$	Trip Level, $T_j \leq 125^\circ\text{C}$	10.3	—	12.5	Volts
	$UV_{Dr}$	Reset Level, $T_j \leq 125^\circ\text{C}$	10.8	—	13.0	Volts
Fault Output Pulse Width**	$t_{FO}$		20	40	—	$\mu\text{s}$
ON Threshold Voltage	$V_{th(on)}$	Applied between $U_P, V_P, W_P-V_{NC},$	2.10	2.35	2.60	Volts
OFF Threshold Voltage	$V_{th(off)}$	$U_N, V_N, W_N-V_{NC}$	1.10	1.40	1.80	Volts

## Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Fin	$R_{th(j-f)Q}$	IGBT Part (Per 1/6 Module)	—	—	9.0	$^\circ\text{C/Watt}$
Thermal Resistance	$R_{th(j-f)D}$	FWDi Part (Per 1/6 Module)	—	—	9.0	$^\circ\text{C/Watt}$

\* Short-Circuit protection is functioning only at the lower-arms. Please select the value of the external shunt resistor such that the SC trip level is less than 5.1A.

\*\*FO signal is only asserted when the SC or UV protection is activated on the low side.



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272







**PS21661-RZ-FR**  
**Intellimod™ Module**  
**Single-In-Line Intelligent Power Module**  
**3 Amperes/600 Volts**

### Recommended Conditions for Use

Characteristic	Symbol	Condition	Min.	Typ.	Value	Units
Supply Voltage	$V_{CC}$	Applied between P-N Terminals	0	300	400	Volts
Control Supply Voltage	$V_D$	Applied between $V_{N1}$ - $V_{NC}$	13.5	15.0	16.5	Volts
	$V_{DB}$	Applied between $V_{UFB}$ - $U(V_{UFS})$ , $V_{VFB}$ - $V(V_{VFS})$ , $V_{WFB}$ - $W(V_{WFS})$	13.0	15.0	18.5	Volts
Control Supply Variation	$\Delta V_D$ , $\Delta V_{DB}$		-1	—	1	V/ $\mu$ s
PWM Input Frequency	$f_{PWM}$	$T_f \leq 100^\circ\text{C}$ , $T_j \leq 125^\circ\text{C}$	—	15	—	kHz
Allowable RMS Current*	$I_O$	$V_{CC} = 300\text{V}$ , $V_D = 15\text{V}$ , $f_c = 5\text{kHz}$ , $P_F = 0.8$ Sinusoidal, $T_j \leq 125^\circ\text{C}$ , $T_f \leq 100^\circ\text{C}$	—	—	3.0	Arms
		$V_{CC} = 300\text{V}$ , $V_D = 15\text{V}$ , $f_c = 15\text{kHz}$ , $P_F = 0.8$ Sinusoidal, $T_j \leq 125^\circ\text{C}$ , $T_f \leq 100^\circ\text{C}$	—	—	2.1	Arms
		$V_{CC} = 300\text{V}$ , $V_D = 15\text{V}$ , $f_c = 15\text{kHz}$ , $P_F = 0.8$ Sinusoidal, $T_j \leq 125^\circ\text{C}$ , $T_f \leq 100^\circ\text{C}$	—	—	—	—
$V_{NC}$ Terminal Voltage	$V_{NC}$	Applied between $V_{NC}$ -N (Include Surge Voltage)	-5	—	5	Volts
Minimum Input Pulse Width**	PWIN	ON/OFF	0.3	—	—	$\mu$ s
Arm Shoot-through Blocking Time	$t_{DEAD}$	For Each Input Signal	2.0	—	—	$\mu$ s


\* The allowable RMS current value depends on the actual application conditions.

\*\*There might be no output when the input signal width is less than PWIN.

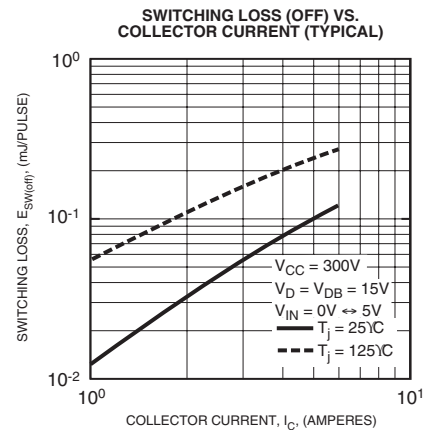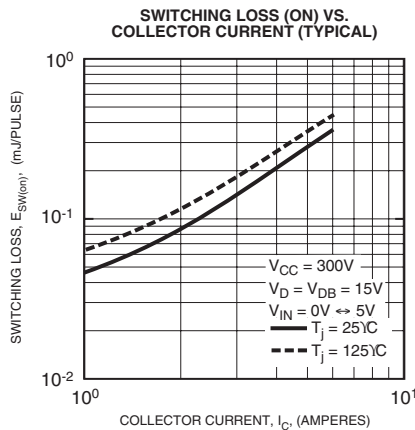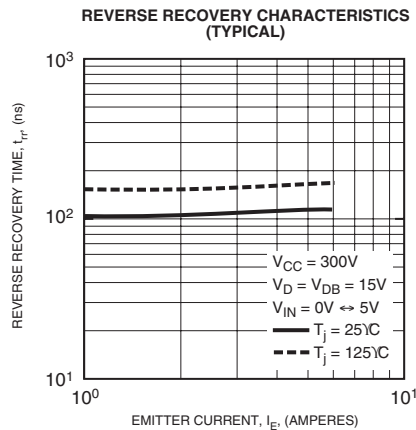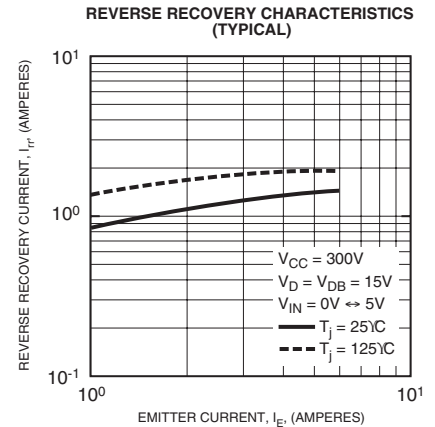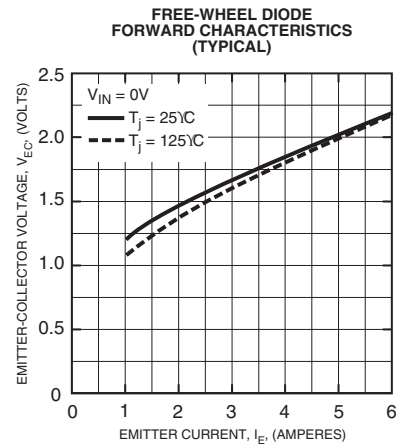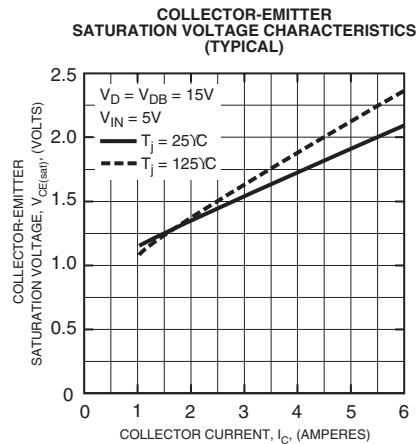

**PS21661-RZ-FR**  
**Intellimod™ Module**  
**Single-In-Line Intelligent Power Module**  
 3 Amperes/600 Volts

**SIP-IPM Application Circuit**

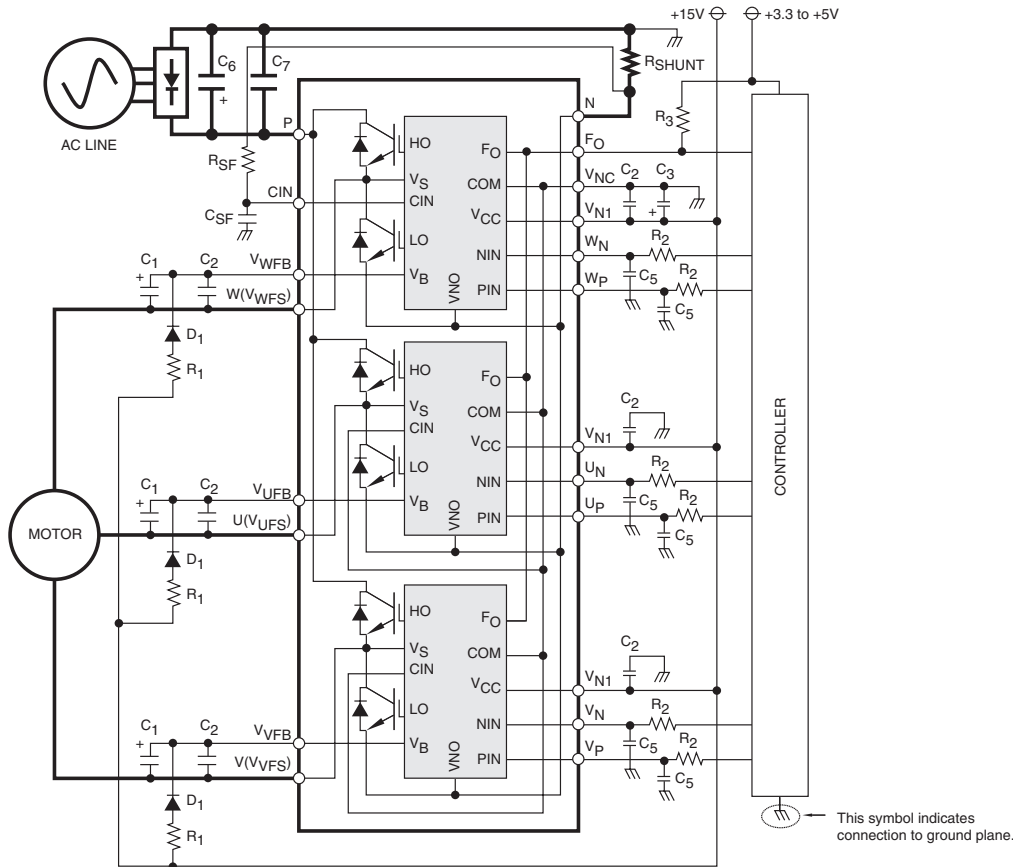

**Component Selection:**

Dsgn.	Typ. Value	Description
D1	1A, 600V	Boot strap supply diode – Ultra fast recovery
C1	10-100µF, 50V	Boot strap supply reservoir – Electrolytic, long life, low Impedance, 105°C (Note 5)
C2	0.22-2.0µF, 50V	Local decoupling/High frequency noise filters – Multilayer ceramic (Note 8)
C3	10-100µF, 50V	Control power supply filter – Electrolytic, long life, low Impedance, 105°C
C5	100pF, 50V	Optional Input signal noise filter – Multilayer ceramic (Note 1)
C6	200-2000µF, 450V	Main DC bus filter capacitor – Electrolytic, long life, high ripple current, 105°C
C7	0.1-0.22µF, 450V	Surge voltage suppression capacitor – Polyester/Polypropylene film (Note 9)
C <sub>SF</sub>	1000pF, 50V	Short circuit detection filter capacitor – Multilayer Ceramic (Note 6, Note 7)
R <sub>SF</sub>	1.8k ohm	Short circuit detection filter resistor (Note 6, Note 7)
R <sub>SHUNT</sub>	5-100 mohm	Current sensing resistor - Non-inductive, temperature stable, tight tolerance (Note 10)
R1	10 ohm	Boot strap supply inrush limiting resistor (Note 5)
R2	330 ohm	Optional control input pull-up resistor (Note 1, Note 2)
R3	1k ohm	Fault output signal pull-up resistor (Note 3)

**Notes:**

- 1) To prevent input signal oscillations minimize wiring length to controller (~2cm). Additional RC filtering (C5 etc.) may be required. If filtering is added be careful to maintain proper dead time and voltage levels. See application notes for details.
- 2) Internal HVIC provides high voltage level shifting allowing direct connection of all six driving signals to the controller.
- 3) F<sub>O</sub> output is an open collector type. Pull-up resistor (R3) should be adjusted to current sink capability of the module.
- 4) Boot strap supply component values must be adjusted depending on the PWM frequency and technique.
- 5) Wiring length associated with R<sub>SHUNT</sub>, R<sub>SF</sub>, C<sub>SF</sub> must be minimized to avoid improper operation of the SC function.
- 6) R<sub>SF</sub>, C<sub>SF</sub> set short circuit protection trip time. Recommend time constant is 1.5us-2.0us. See application notes.
- 7) Local decoupling/high frequency filter capacitors must be connected as close as possible to the modules pins.
- 8) The length of the DC link wiring between C6, C7, the DIP's P terminal and the shunt must be minimized to prevent excessive transient voltages. In particular C7 should be mounted as close to the DIP as possible.
- 9) Use high quality, tight tolerance current sensing resistor. Connect resistor as close as possible to the DIP's N terminal. Be careful to check for proper power rating. See application notes for calculation of resistance value.



Поставка электронных компонентов

**Юридический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.  
**Фактический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.  
ИНН 780277764  
КПП 780501001  
Р/С 40702810422510004035 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в Санкт-Петербурге К/С 30101810900000000703  
БИК 044030703  
**Телефон:** 8 (812) 309-44-11 (многоканальный)  
**Факс:** 8 (812) 309-44-11  
**Электронная почта:** [sales@timechips.ru](mailto:sales@timechips.ru)  
**Сайт:** [timechips.ru](http://timechips.ru)

## Информационное письмо

Компания «ТаймЧипс» - одна из наиболее динамично развивающихся компаний в сфере поставок электронных компонентов. Мы поставляем широкую номенклатуру электронных компонентов отечественных и импортных производителей, как напрямую, так и с крупных мировых складов, позволяющих охватить выборочную номенклатуру более 300 брендов, а также специализируемся на поставках дисплеев и является официальным дистрибьютором компании Shenzhen Startek Electronic Technology Co, на территории Российской Федерации.

Наличие собственной логистики позволяет в кратчайшие сроки доставлять товар нашим клиентам. В нашей компании имеется Конструкторский отдел, где наши специалисты проводят технические консультации клиентов, квалифицированную поддержку и помощь российским разработчикам. Осуществляем Поставки импортной продукции под контролем ВП МО РФ, на предприятия Оборонно-промышленного комплекса России. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001-2011.

Благодаря нацеленности на результат, мы уверенно занимаем новые позиции на рынке, заинтересовывая Клиента не только актуальными ценами и гибким подходом, но и постоянным вниманием.

**Миссия** – обеспечение долгосрочного и взаимовыгодного партнерства с клиентами.

**Наша цель** – Обеспечение клиентам самого широкого ассортимента электронных компонентов и бесперебойности поставок.

**Мы - это развитие! Мы задаем темп! Мы разные, но вместе! Мы работаем для вас!**

Так же имеем прямые поставки от производителей:

TAI-SAW Пав-компоненты ([www.taisaw.com](http://www.taisaw.com))

TRANSCOM СВЧ-компоненты ([www.transcominc.com.tw](http://www.transcominc.com.tw))

Mini Circuits ВЧ-СВЧ-компоненты ([minicircuits.com](http://minicircuits.com))

SAMTEC- разъемы ([www.samtec.com](http://www.samtec.com))

4Star Разъемы РЧ (Даташиты по продукции 4Star, которые Вы сможете загрузить по этой ссылке: <https://yadi.sk/i/tPjnmGGrpmbYj>)

ULNION Преобразователи напряжения ([converterdc.com/](http://converterdc.com/))

**Отличные рекомендации на рынке, уверенность в качестве поставляемой продукции делают нас надежными партнерами для наших клиентов.**

**«ТаймЧипс» - это:**

- Гарантия качества поставляемой продукции;
- Широкий ассортимент;
- Минимальные сроки поставок;
- Техническая поддержка;
- Подбор комплектации;
- Индивидуальный подход;
- Гибкие цены.

**Модули, микросхемы, пассивные компоненты, Xilinx (XC), Altera (EP,EPF, EPM) и силовая электроника** – это наши ведущие позиции, на поставку которых мы гарантированно дадим Вам самые выгодные предложения!

**В структуру компании так же входит конструкторский отдел, который помогает разработчикам и конструкторам в решении следующих задач:**

- Оценка стоимости проекта по компонентам;
- Подбор оптимального решения при выборе компонента;
- Подбор аналогов;
- Техническая поддержка;
- Консультации у производителей;
- Поставка прототипов;

*С Уважением, Чернов Павел.*

*Руководитель отдела продаж ООО "ТАЙМЧИПС"*

*Официальный дистрибьютор Shenzhen Startek Electronic Technology Co.,Ltd в России (USB Display Modules , LED Displays, Serial Modules).*

<http://www.timechips.ru/>

<http://lcd-timechips.ru/>

**Телефон: +7 (812) 309-44-11 доб. 141**

**Факс: +7 (812) 309-44-11 доб. 152**

**Моб. Тел. +7 (905) 232-40-65**

**Skype: time.chips5**

**Электронная почта: [manager1@timechips.ru](mailto:manager1@timechips.ru)**

---