

## FEATURES

- **Gain-Bandwidth: 45MHz**
- **Unity-Gain Stable**
- **Slew Rate: 250V/ $\mu$ s**
- C-Load™ Op Amp Drives Capacitive Loads
- Maximum Input Offset Voltage: 1mV
- Maximum Input Bias Current: 300nA
- Maximum Input Offset Current: 300nA
- Minimum Output Swing Into 500 $\Omega$ :  $\pm$ 12V
- Minimum DC Gain: 20V/mV,  $R_L = 500\Omega$
- Settling Time to 0.1%: 75ns, 10V Step
- Settling Time to 0.01%: 95ns, 10V Step
- Differential Gain: 0.1%,  $A_V = 2$ ,  $R_L = 150\Omega$
- Differential Phase: 0.2°,  $A_V = 2$ ,  $R_L = 150\Omega$

## APPLICATIONS

- Wideband Amplifiers
- Buffers
- Active Filters
- Video and RF Amplification
- Cable Drivers
- 8-, 10-, 12-Bit Data Acquisition Systems

## DESCRIPTION


The LT<sup>®</sup>1220 is a high speed operational amplifier with superior DC performance. The LT1220 features reduced input offset voltage, lower input bias currents and higher DC gain than devices with comparable bandwidth and slew rate. The circuit is a single gain stage that includes proprietary DC gain enhancement circuitry to obtain precision with high speed. The high gain and fast settling time make the circuit an ideal choice for data acquisition systems. The circuit is also capable of driving large capacitive loads which makes it useful in buffer or cable driver applications.

The LT1220 is a member of a family of fast, high performance amplifiers that employ Linear Technology Corporation's advanced complementary bipolar processing. For applications with gains of 4 or greater the LT1221 can be used, and for gains of 10 or greater the LT1222 can be used for increased bandwidth.

LT, LTC and LT are registered trademarks of Linear Technology Corporation  
 C-Load is a trademark of Linear Technology Corporation

## TYPICAL APPLICATION


Two Op Amp Instrumentation Amplifier

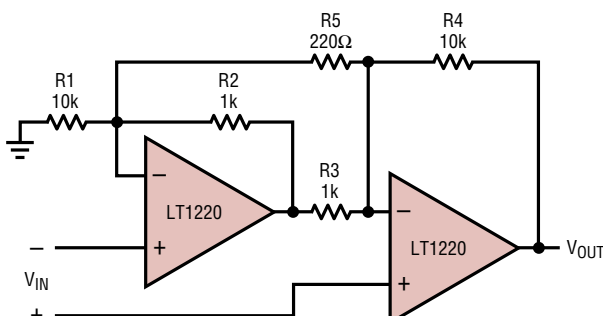

GAIN =  $[R4/R3][1 + (1/2)(R2/R1 + R3/R4) + (R2 + R3)/R5] = 102$   
 TRIM R5 FOR GAIN  
 TRIM R1 FOR COMMON MODE REJECTION  
 BW = 450kHz

LT1220 • TA01

Inverter Pulse Response

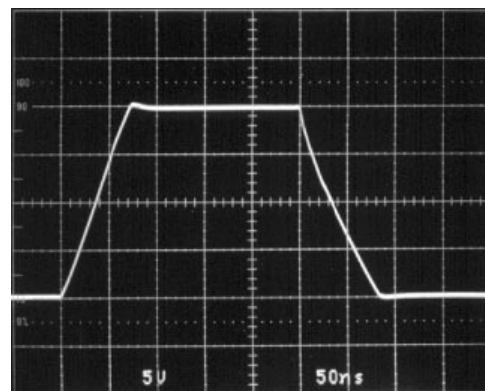

$R_F = R_G = 1k$   $V_{IN} = 20V$   
 $V_S = \pm 15V$   $f = 2MHz$

LT1220 • TA02

# LT1220

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|   |                |  |                |
|---|----------------|--|----------------|
| Total Supply Voltage ( $V^+$ to $V^-$ ) ..... | 36V            | Operating Temperature Range                |                |
| Differential Input Voltage .....              | $\pm 6V$       | LT1220C .....                              | -40°C TO 85°C  |
| Input Voltage .....                           | $\pm V_S$      | LT1220M ( <b>OBSOLETE</b> ) .....          | -55°C to 150°C |
| Output Short-Circuit Duration (Note 2) .....  | Indefinite     | Maximum Junction Temperature (See Below)   |                |
| Specified Temperature Range                   |                | Plastic Package .....                      | 150°C          |
| LT1220C (Note 3) .....                        | 0°C to 70°C    | Ceramic Package ( <b>OBSOLETE</b> ) .....  | 175°C          |
| LT1220M ( <b>OBSOLETE</b> ) .....             | -55°C to 125°C | Storage Temperature Range .....            | -65°C to 150°C |
|   |                | Lead Temperature (Soldering, 10 sec) ..... | 300°C          |

## PACKAGE/ORDER INFORMATION

|  |                      |   |                        |
|--|----------------------|---|------------------------|
| <p>TOP VIEW</p> <p>H PACKAGE<br/>8-LEAD TO-5 METAL CAN<br/><math>T_{JMAX} = 175^\circ\text{C}</math>, <math>\theta_{JA} = 150^\circ\text{C/W}</math></p> | ORDER PART NUMBER    | <p>TOP VIEW</p> <p>N8 PACKAGE      S8 PACKAGE<br/>8-LEAD PLASTIC DIP   8-LEAD PLASTIC SOIC<br/><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 130^\circ\text{C/W}</math> (N)<br/><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 190^\circ\text{C/W}</math> (S)</p> <p>J8 PACKAGE<br/>8-LEAD CERAMIC DIP<br/><math>T_{JMAX} = 175^\circ\text{C}</math>, <math>\theta_{JA} = 100^\circ\text{C/W}</math> (J)</p> | ORDER PART NUMBER      |
|  | LT1220CH<br>LT1220MH |   | ORDER PART NUMBER      |
| <p><b>OBSOLETE PACKAGE</b><br/>Consider the N8 or S8 Packages for Alternate Source</p>   |                      | <p><b>OBSOLETE PACKAGE</b><br/>Consider the N8 Package for Alternate Source</p>   | LT1220CN8<br>LT1220CS8 |
|  |                      |   | S8 PART MARKING        |
|  |                      |   | 1220                   |
|  |                      |   | ORDER PART NUMBER      |
|  |                      |   | LT1220MJ8              |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_S = \pm 15V$ , $V_{CM} = 0V$ , unless otherwise specified.

| SYMBOL    | PARAMETER                      | CONDITIONS                              | MIN | TYP       | MAX | UNITS                    |
|-----------|--------------------------------|---|-----|-----------|-----|--------------------------|
| $V_{OS}$  | Input Offset Voltage           | (Note 4)                                |     | 0.5       | 1   | mV                       |
| $I_{OS}$  | Input Offset Current           |   |     | 100       | 300 | nA                       |
| $I_B$     | Input Bias Current             |   |     | 100       | 300 | nA                       |
| $e_n$     | Input Noise Voltage            | $f = 10\text{kHz}$                      |     | 17        |     | nV/ $\sqrt{\text{Hz}}$   |
| $i_n$     | Input Noise Current            | $f = 10\text{kHz}$                      |     | 2         |     | pA/ $\sqrt{\text{Hz}}$   |
| $R_{IN}$  | Input Resistance               | $V_{CM} = \pm 12V$<br>Differential      | 20  | 45<br>150 |     | M $\Omega$<br>k $\Omega$ |
| $C_{IN}$  | Input Capacitance              |   |     | 2         |     | pF                       |
|           | Input Voltage Range (Positive) |   | 12  | 14        |     | V                        |
|           | Input Voltage Range (Negative) |   |     | -13       | -12 | V                        |
| CMRR      | Common Mode Rejection Ratio    | $V_{CM} = \pm 12V$                      | 92  | 114       |     | dB                       |
| PSRR      | Power Supply Rejection Ratio   | $V_S = \pm 5V$ to $\pm 15V$             | 90  | 94        |     | dB                       |
| $A_{VOL}$ | Large-Signal Voltage Gain      | $V_{OUT} = \pm 10V$ , $R_L = 500\Omega$ | 20  | 50        |     | V/mV                     |
| $V_{OUT}$ | Output Swing                   | $R_L = 500\Omega$                       | 12  | 13        |     | $\pm V$                  |
| $I_{OUT}$ | Output Current                 | $V_{OUT} = \pm 12V$                     | 24  | 26        |     | mA                       |
| SR        | Slew Rate                      | (Note 5)                                | 200 | 250       |     | V/ $\mu\text{s}$         |
|           | Full Power Bandwidth           | 10V Peak (Note 6)                       |     | 4         |     | MHz                      |
| GBW       | Gain-Bandwidth                 | $f = 1\text{MHz}$                       |     | 45        |     | MHz                      |

## ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$ , $T_A = 25^\circ C$ , $V_{CM} = 0V$ , unless otherwise specified.

| SYMBOL     | PARAMETER            | CONDITIONS                                       | MIN | TYP  | MAX  | UNITS    |
|------------|----------------------|--|-----|------|------|----------|
| $t_r, t_f$ | Rise Time, Fall Time | $A_V = 1$ , 10% to 90%, 0.1V                     |     | 2.5  |      | ns       |
|            | Overshoot            | $A_V = 1$ , 0.1V                                 |     | 5    |      | %        |
|            | Propagation Delay    | $A_V = 1$ , 50% $V_{IN}$ to 50% $V_{OUT}$ , 0.1V |     | 4.9  |      | ns       |
| $t_s$      | Settling Time        | 10V Step, 0.1%                                   |     | 75   |      | ns       |
|            |                      | 10V Step, 0.01%                                  |     | 95   |      | ns       |
|            | Differential Gain    | $f = 3.58MHz$ , $R_L = 150\Omega$ (Note 7)       |     | 0.10 |      | %        |
|            |                      | $f = 3.58MHz$ , $R_L = 1k$ (Note 7)              |     | 0.02 |      | %        |
|            | Differential Phase   | $f = 3.58MHz$ , $R_L = 150\Omega$ (Note 7)       |     | 0.20 |      | DEG      |
|            |                      | $f = 3.58MHz$ , $R_L = 1k$ (Note 7)              |     | 0.03 |      | DEG      |
| $R_O$      | Output Resistance    | $A_V = 1$ , $f = 1MHz$                           |     | 1    |      | $\Omega$ |
| $I_S$      | Supply Current       |  |     | 8    | 10.5 | mA       |

The ● denotes the specifications which apply over the temperature range  $0^\circ C \leq T_A \leq 70^\circ C$ , otherwise specifications are at  $T_A = 25^\circ C$ .  $V_S = \pm 15V$ ,  $V_{CM} = 0V$ , unless otherwise specified.

| SYMBOL    | PARAMETER                    | CONDITIONS                              | MIN | TYP | MAX | UNITS            |
|-----------|------------------------------|---|-----|-----|-----|------------------|
| $V_{OS}$  | Input Offset Voltage         | (Note 4)                                | ●   | 0.5 | 3.5 | mV               |
|           | Input $V_{OS}$ Drift         |   | ●   | 20  |     | $\mu V/^\circ C$ |
| $I_{OS}$  | Input Offset Current         |   | ●   | 100 | 400 | nA               |
| $I_B$     | Input Bias Current           |   | ●   | 100 | 400 | nA               |
| CMRR      | Common Mode Rejection Ratio  | $V_{CM} = \pm 12V$                      | ●   | 92  | 114 | dB               |
| PSRR      | Power Supply Rejection Ratio | $V_S = \pm 5V$ to $\pm 15V$             | ●   | 86  | 94  | dB               |
| $A_{VOL}$ | Large-Signal Voltage Gain    | $V_{OUT} = \pm 10V$ , $R_L = 500\Omega$ | ●   | 20  | 50  | V/mV             |
| $V_{OUT}$ | Output Swing                 | $R_L = 500\Omega$                       | ●   | 12  | 13  | $\pm V$          |
| $I_{OUT}$ | Output Current               | $V_{OUT} = \pm 12V$                     | ●   | 24  | 26  | mA               |
| SR        | Slew Rate                    | (Note 5)                                | ●   | 180 | 250 | V/ $\mu s$       |
| $I_S$     | Supply Current               |   | ●   | 8   | 11  | mA               |

The ● denotes the specifications which apply over the temperature range  $-55^\circ C \leq T_A \leq 125^\circ C$ , otherwise specifications are at  $T_A = 25^\circ C$ .  $V_S = \pm 15V$ ,  $V_{CM} = 0V$ , unless otherwise specified.

| SYMBOL    | PARAMETER                    | CONDITIONS                              | MIN | TYP | MAX  | UNITS            |
|-----------|------------------------------|---|-----|-----|------|------------------|
| $V_{OS}$  | Input Offset Voltage         | (Note 4)                                | ●   | 0.5 | 4    | mV               |
|           | Input $V_{OS}$ Drift         |   | ●   | 20  |      | $\mu V/^\circ C$ |
| $I_{OS}$  | Input Offset Current         |   | ●   | 100 | 800  | nA               |
| $I_B$     | Input Bias Current           |   | ●   | 100 | 1000 | nA               |
| CMRR      | Common Mode Rejection Ratio  | $V_{CM} = \pm 12V$                      | ●   | 92  | 114  | dB               |
| PSRR      | Power Supply Rejection Ratio | $V_S = \pm 5V$ to $\pm 15V$             | ●   | 82  | 94   | dB               |
| $A_{VOL}$ | Large-Signal Voltage Gain    | $V_{OUT} = \pm 10V$ , $R_L = 500\Omega$ | ●   | 5   | 50   | V/mV             |
| $V_{OUT}$ | Output Swing                 | $R_L = 500\Omega$                       | ●   | 10  | 13   | $\pm V$          |
|           |                              | $R_L = 1k$                              | ●   | 12  | 13   | $\pm V$          |
| $I_{OUT}$ | Output Current               | $V_{OUT} = \pm 10V$                     | ●   | 20  | 26   | mA               |
|           |                              | $V_{OUT} = \pm 12V$                     | ●   | 12  | 13   | mA               |
| SR        | Slew Rate                    | (Note 5)                                | ●   | 130 | 250  | V/ $\mu s$       |
| $I_S$     | Supply Current               |   | ●   | 8   | 11   | mA               |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** A heat sink may be required when the output is shorted indefinitely.

**Note 3:** Commercial parts are designed to operate over  $-40^\circ C$  to  $85^\circ C$ , but are not tested nor guaranteed beyond  $0^\circ C$  to  $70^\circ C$ . Industrial grade parts specified and tested over  $-40^\circ C$  to  $85^\circ C$  are available on special request. Consult factory.

**Note 4:** Input offset voltage is pulse tested and is exclusive of warm-up drift.


**Note 5:** Slew rate is measured between  $\pm 10V$  on an output swing of  $\pm 12V$ .

**Note 6:**  $FPBW = SR/2\pi V_p$ .

**Note 7:** Differential Gain and Phase are tested in  $A_V = 2$  with five amps in series. Attenuators of 1/2 are used as loads ( $75\Omega$ ,  $75\Omega$  and  $499\Omega$ ,  $499\Omega$ ).


## TYPICAL PERFORMANCE CHARACTERISTICS

**Input Common Mode Range vs Supply Voltage**

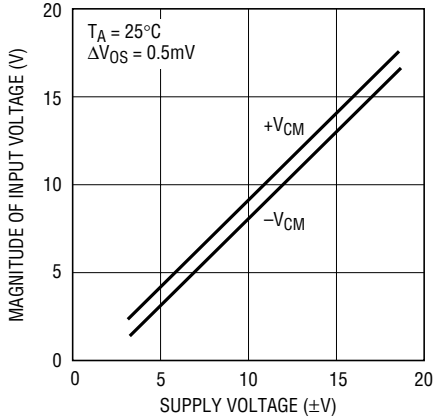


LT1220 • TPC01

**Supply Current vs Supply Voltage and Temperature**

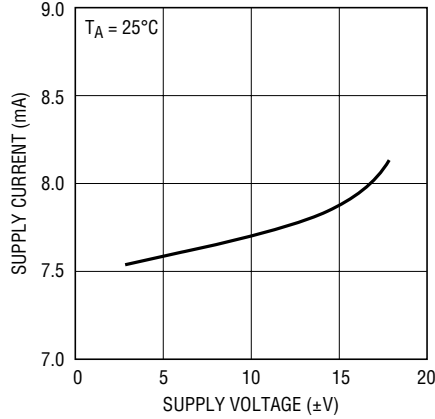


LT1220 • TPC02

**Output Voltage Swing vs Supply Voltage**

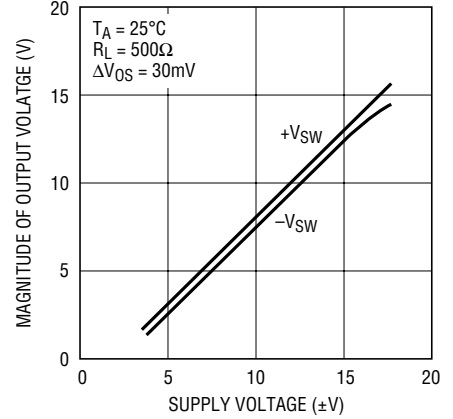


LT1220 • TPC03

**Output Voltage Swing vs Resistive Load**

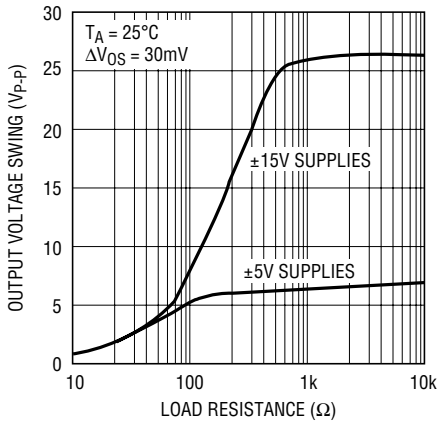


LT1220 • TPC04

**Input Bias Current vs Input Common Mode Voltage**

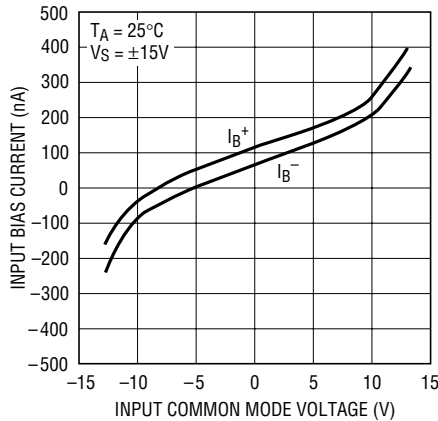


LT1220 • TPC05

**Open-Loop Gain vs Resistive Load**

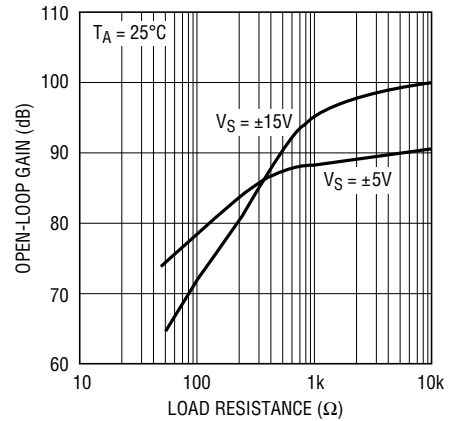


LT1220 • TPC06

**Output Short-Circuit Current vs Temperature**

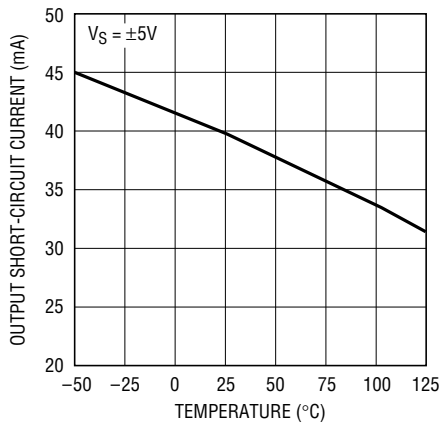


LT1220 • TPC07

**Input Noise Spectral Density**

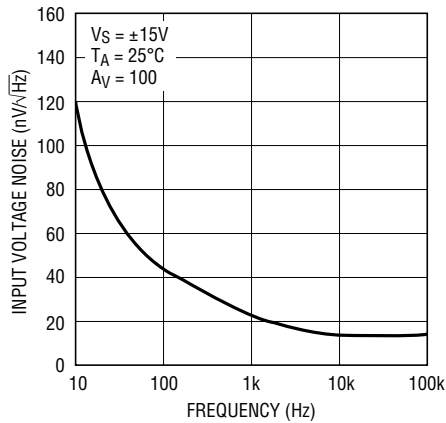

LT1220 • TPC08


**Power Supply Rejection Ratio vs Frequency**

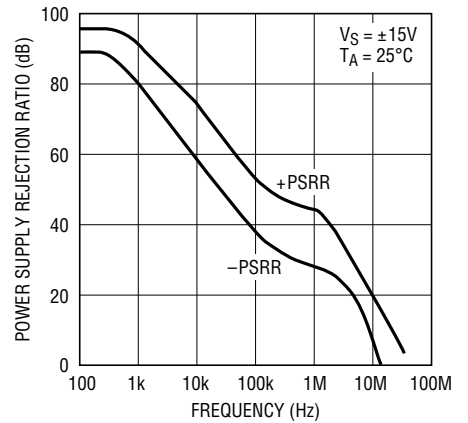

LT1220 • TPC09


# TYPICAL PERFORMANCE CHARACTERISTICS

**Common Mode Rejection Ratio vs Frequency**

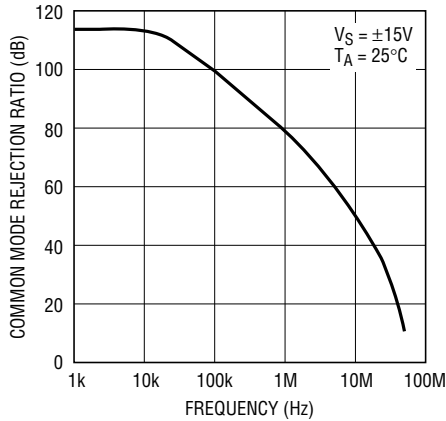


LT1220 • TPC10

**Output Swing and Error vs Settling Time (Noninverting)**

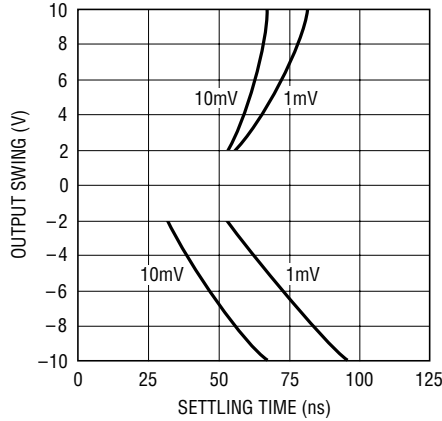


LT1220 • TPC11

**Output Swing and Error vs Settling Time (Inverting)**

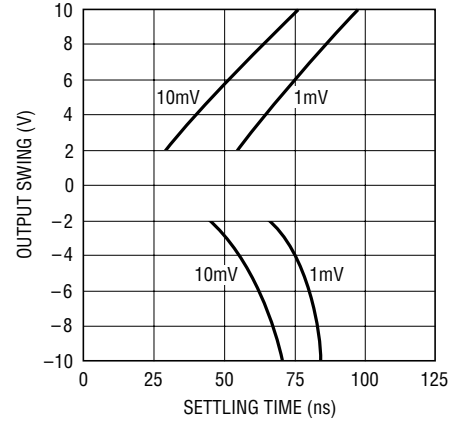


LT1220 • TPC12

**Voltage Gain and Phase vs Frequency**

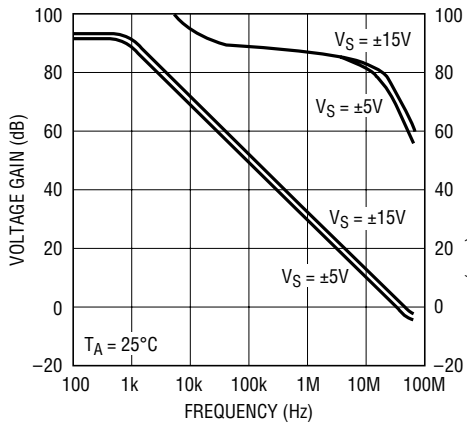


LT1220 • TPC13

**Frequency Response vs Capacitive Load**

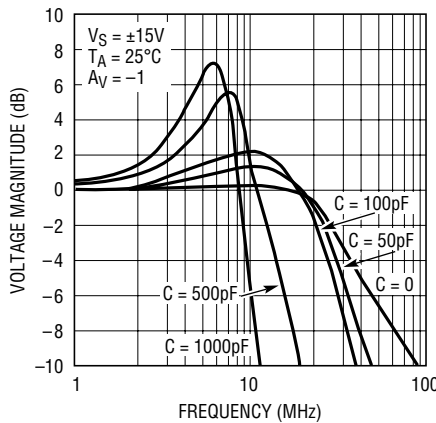


LT1220 • TPC14

**Closed-Loop Output Impedance vs Frequency**

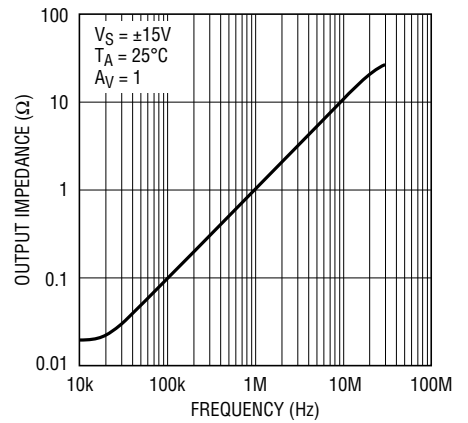


LT1220 • TPC15

**Gain-Bandwidth vs Temperature**

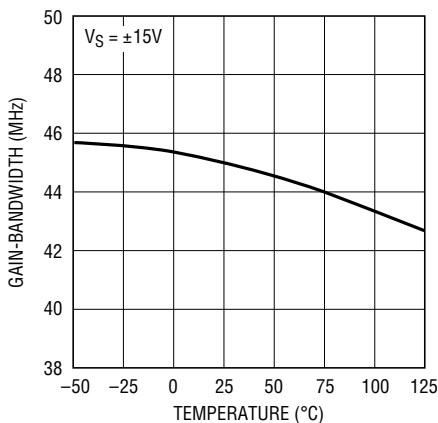


LT1220 • TPC16

**Slew Rate vs Temperature**

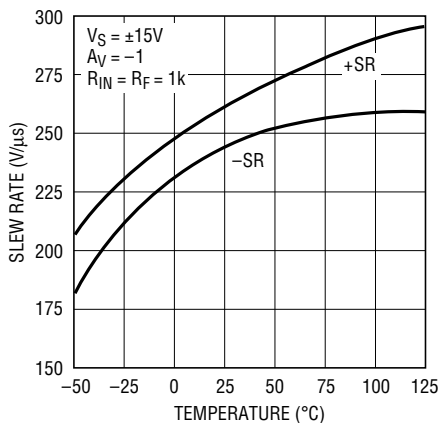

LT1220 • TPC24


**Total Harmonic Distortion vs Frequency**

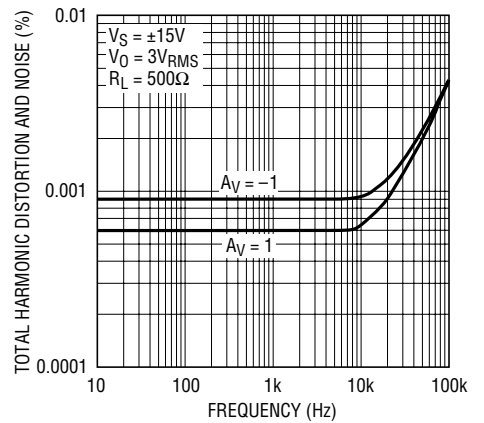

LT1220 • TPC18


## TYPICAL PERFORMANCE CHARACTERISTICS

Small Signal,  $A_V = 1$

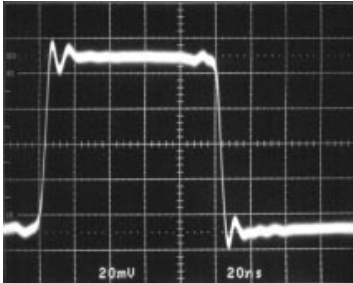


$R_G = 0$   $V_{IN} = 100\text{mV}$  LT1220 • TPC19  
 $V_S = \pm 15\text{V}$   $f = 5\text{MHz}$

Large Signal,  $A_V = 1$




$R_G = 0$   $V_{IN} = 20\text{V}$  LT1220 • TPC20  
 $V_S = \pm 15\text{V}$   $f = 2\text{MHz}$

Large Signal,  $A_V = 1$ ,  
 $C_L = 10,000\text{pF}$

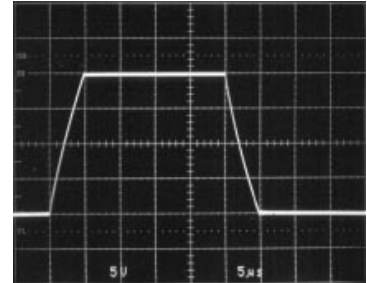


$R_G = 0$   $V_{IN} = 10\text{V}$  LT1220 • TPC21  
 $V_S = \pm 15\text{V}$   $f = 20\text{kHz}$

Small Signal,  $A_V = -1$

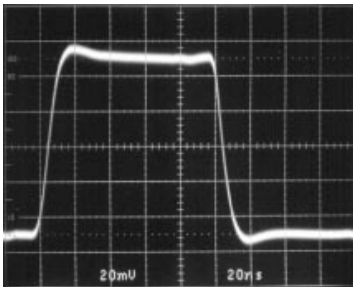


$R_F = R_G = 1\text{k}$   $V_{IN} = 100\text{mV}$  LT1220 • TPC22  
 $V_S = \pm 15\text{V}$   $f = 5\text{MHz}$

Large Signal,  $A_V = -1$

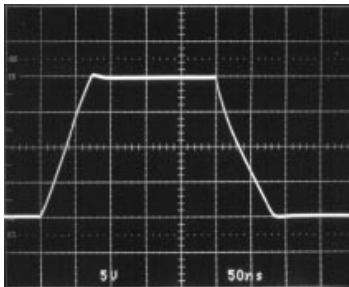

$R_F = R_G = 1\text{k}$   $V_{IN} = 20\text{V}$  LT1220 • TPC23  
 $V_S = \pm 15\text{V}$   $f = 2\text{MHz}$

Small Signal,  $A_V = -1$ ,  
 $C_L = 1,000\text{pF}$

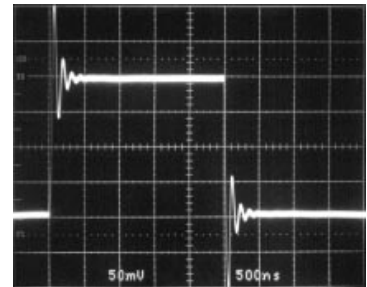


$R_F = R_G = 1\text{k}$   $V_{IN} = 200\text{mV}$  LT1220 • TPC24  
 $V_S = \pm 15\text{V}$   $f = 200\text{kHz}$

## APPLICATIONS INFORMATION

The LT1220 may be inserted directly into HA2505/15/25, HA2541/2/4, AD817, AD847, EL2020, EL2044 and LM6361 applications, provided that the nulling circuitry is removed. The suggested nulling circuit for the LT1220 is shown in the following figure.

Offset Nulling



### Layout and Passive Components

The LT1220 amplifier is easy to apply and tolerant of less than ideal layouts. For maximum performance (for example, fast settling time) use a ground plane, short lead lengths and RF-quality bypass capacitors (0.01µF to 0.1µF). For high driver current applications use low ESR bypass capacitors (1µF to 10µF tantalum). Sockets should be avoided when maximum frequency performance is required, although low profile sockets can provide reasonable performance up to 50MHz. For more details see Design Note 50. Feedback resistors greater than 5k are not recommended because a pole is formed with the input capacitance which can cause peaking or oscillations.

## APPLICATIONS INFORMATION

### Input Considerations

Bias current cancellation circuitry is employed on the inputs of the LT1220 so the input bias current and input offset current have identical specifications. For this reason, matching the impedance on the inputs to reduce bias current errors is not necessary.

### Capacitive Loading

The LT1220 is stable with capacitive loads. This is accomplished by sensing the load induced output pole and adding compensation at the amplifier gain node. As the capacitive load increases, both the bandwidth and phase margin decrease. There will be peaking in the frequency domain as shown in the curve of Frequency Response vs Capacitive Load. The small-signal transient response will have more overshoot as shown in the photo of the small-signal response with 1000pF load. The large-signal response with a 10,000pF load shows the output slew rate being limited to 4V/μs by the short-circuit current. The LT1220 can drive coaxial cable directly, but for best pulse fidelity a resistor of value equal to the characteristic impedance of the cable

(i.e., 75Ω) should be placed in series with the output. The other end of the cable should be terminated with the same value resistor to ground.


### DAC Current-to-Voltage Amplifier

The high gain, low offset voltage, low input bias current, and fast settling of the LT1220 make it particularly useful as an I/V converter for current output DACs. A typical application is shown with a 565A type, 12-bit, 2mA full-scale output current DAC. The 5k resistor around the LT1220 is internal to the DAC and gives a 10V full-scale output voltage. A 5pF capacitor in parallel with the feedback resistor compensates for the DAC output capacitance and improves settling. The output of the LT1220 settles to 1/2LSB (1.2mV) in less than 300ns. The accuracy of this circuit is equal to:

$$V_{\text{ERROR}} = V_{\text{OS}} + (I_{\text{OS}} \cdot 5\text{k}\Omega) + (V_{\text{OUT}}/A_{\text{VOL}})$$


At room temperature the worst-case error is 3mV (1.2LSB). Typically the error is 1.2mV (1/2LSB). Over the commercial temperature range the worse-case error is 6mV (2.5LSB).

## SIMPLIFIED SCHEMATIC

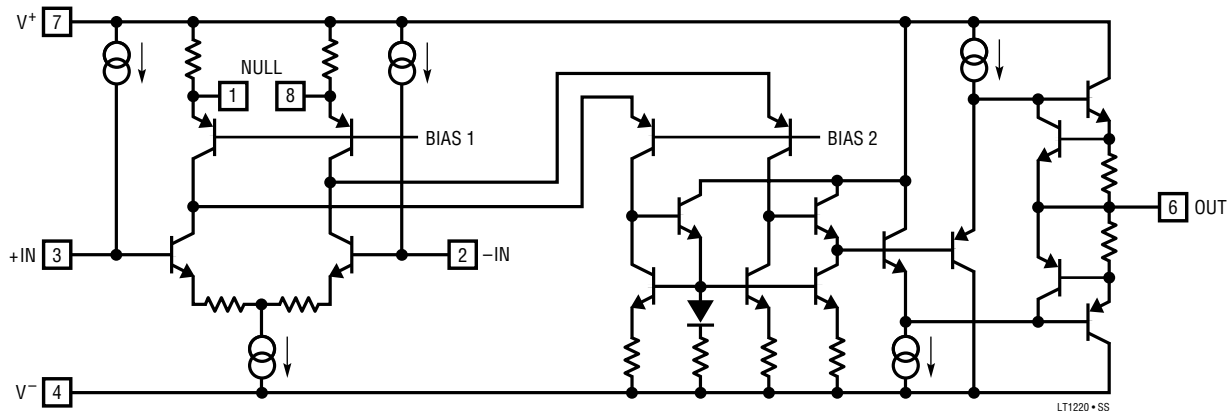

**PACKAGE DESCRIPTION**

**H Package**  
**8-Lead TO-5 Metal Can (.200 Inch PCD)**  
 (Reference LTC DWG # 05-08-1320)

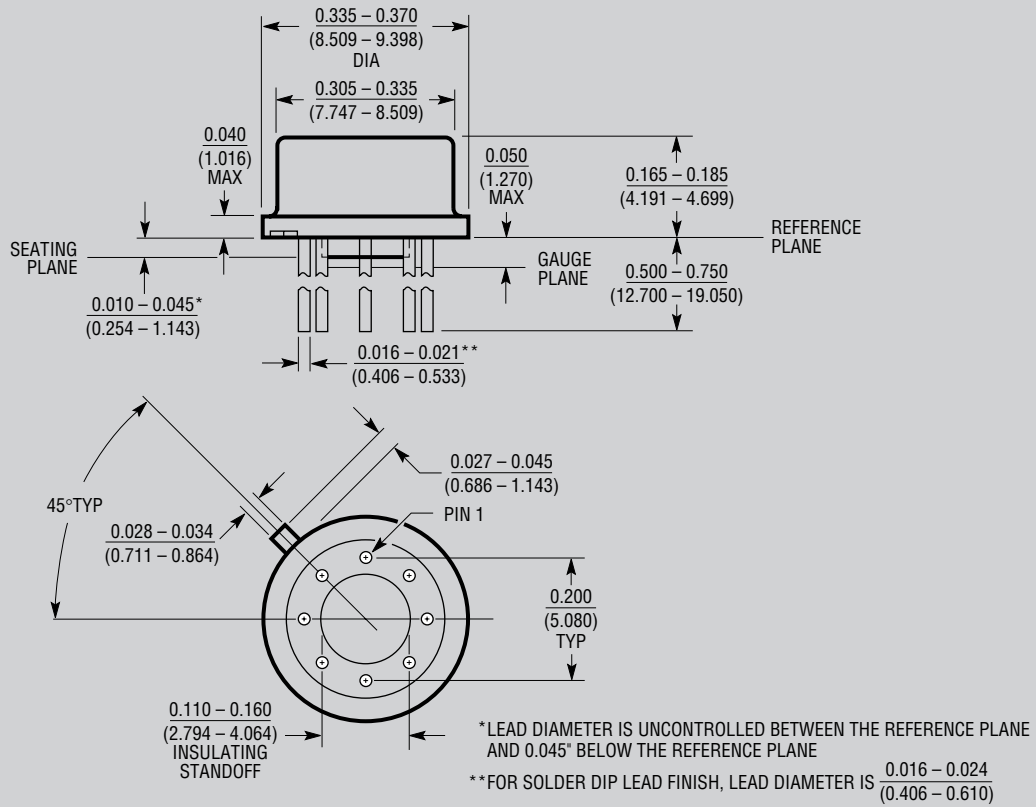


H8(TO-5) 0.200 PCD 1197

**OBsolete PACKAGE**



**PACKAGE DESCRIPTION**




**J8 Package**  
**8-Lead CERDIP (Narrow .300 Inch, Hermetic)**  
 (Reference LTC DWG # 05-08-1110)

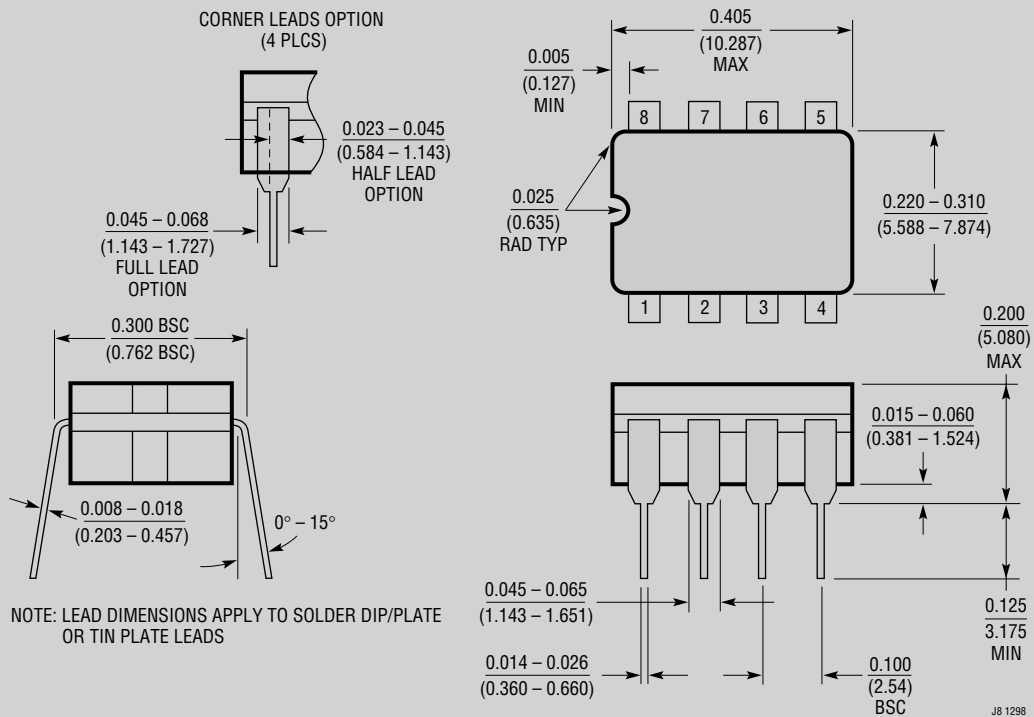

**OBsolete PACKAGE**

**PACKAGE DESCRIPTION**

**N8 Package**  
**8-Lead PDIP (Narrow .300 Inch)**  
 (Reference LTC DWG # 05-08-1510)

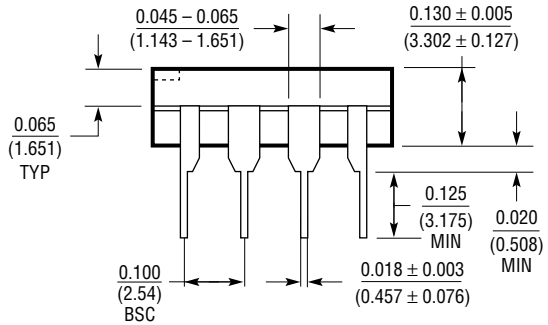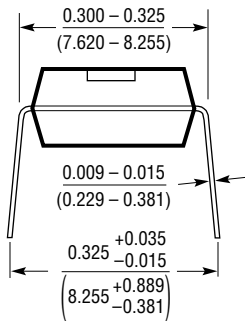
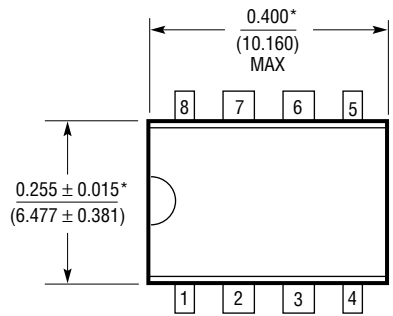


\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

N8 1098

**PACKAGE DESCRIPTION**

**S8 Package**  
**8-Lead Plastic Small Outline (Narrow .150 Inch)**  
 (Reference LTC DWG # 05-08-1610)

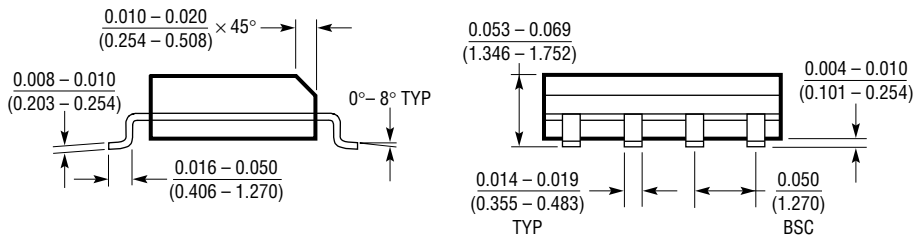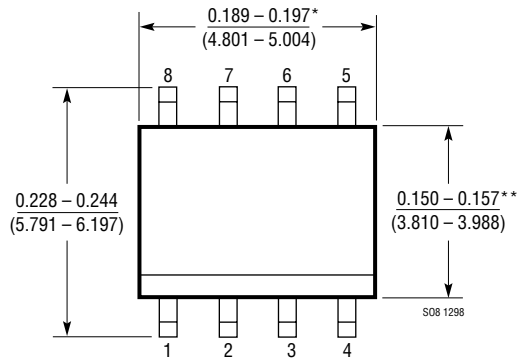


\*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

\*\*DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE


## TYPICAL APPLICATIONS

### Cable Driver

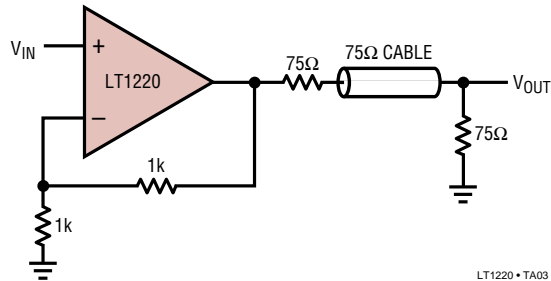


LT1220 • TA03

### DAC Current-to-Voltage Converter

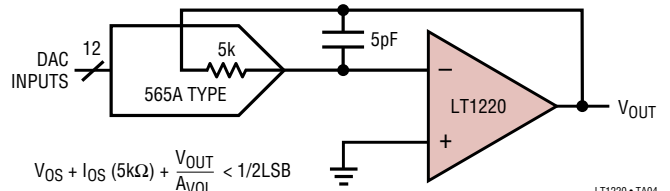

LT1220 • TA04

### 1MHz, 4th Order Butterworth Filter

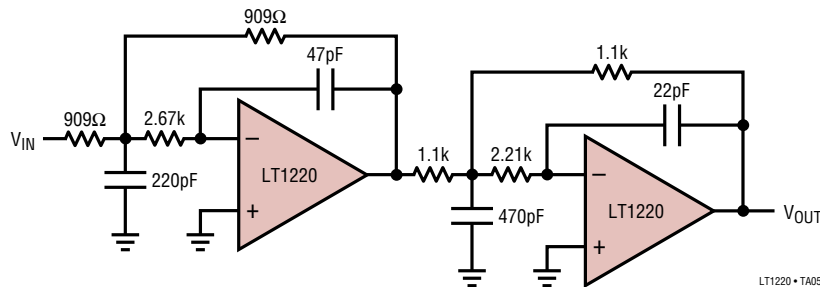

LT1220 • TA05

## RELATED PARTS

| PART NUMBER | DESCRIPTION               | COMMENTS                            |
|-------------|---------------------------|-------------------------------------|
| LT1221      | 150MHz, 250V/μs Amplifier | $A_V \geq 4$ Version of the LT1220  |
| LT1222      | 500MHz, 200V/μs Amplifier | $A_V \geq 10$ Version of the LT1220 |