

Resin board version NBR32 Part number 88973211



- Vibration resistance
- Extended temperature range
- Outputs via removable connectors
- IP50 seal (connectors)
- DB 9-pin programming port via standard RS 232 cable
- Designed for application-specific functions
- Supplied without connectors. Connectors available (Ref. 88970313, 88970314, 88970315, 88970316)

Part numbers Part					
	Type	Designation	Input	Output	Supply
88973211	NBR32	Relay outputs with connectors	20 digital (including 6 analogue)	12 relays	24 V DC

annual annian mant abancetoristics (CD, CD, V	
eneral environment characteristics for CB. CD. X	(D, XB, XR and XE product types
Certifications	CE, UL, CSA, GL
Conformity to standards (with the low voltage directive	IEC/EN 61131-2 (Open equipment)
and EMC directive)	IEC/EN 61131-2 (Zone B)
	IEC/EN 61000-6-2,
	IEC/EN 61000-6-3 (*) IEC/EN 61000-6-4
	(*) Except configuration (88 970 1.1 or 88 970 1.2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure)
Earthing	Not included
Protection rating	In accordance with IEC/EN 60529:
	IP40 on front panel
	IP20 on terminal block
Overvoltage category Pollution	3 in accordance with IEC/EN 60664-1 Degree : 2 in accordance with IEC/EN 61131-2
Max operating Altitude	Operation : 2000 m
nax operating Attitude	Transport : 3048 m
Mechanical resistance	Immunity to vibrations IEC/EN 60068-2-6, test Fc
	Immunity to shock IEC/EN 60068-2-27, test Ea
Resistance to electrostatic discharge	Immunity to ESD
	IEC/EN 61000-4-2, level 3
Resistance to HF interference	Immunity to radiated electrostatic fields IEC/EN 61000-4-3
	Immunity to fast transients (burst immunity)
	IEC/EN 61000-4-4, level 3
	Immunity to shock waves
	IEC/EN 61000-4-5 Radio frequency in common mode
	IEC/EN 61000-4-6, level 3
	Voltage dips and breaks (AC)
	IEC/EN 61000-4-11
	Immunity to damped oscillatory waves IEC/EN 61000-4-12
Conducted and radiated emissions	Class B (*) in accordance with EN 55022, EN 55011 (CISPR22, CISPR11) group 1
	(*) Except configuration (88 970 1.1 or 88 970 1.2) +
	(88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure)
Operating temperature	-20 →+70 °C except CB and XB versions in VDC : -30 →+70 °C in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2
Storage temperature	-40 -+70 °C in accordance with IEC/EN 60068-2-1 and
norage temperature	1EC/EN 60068-2-2
Relative humidity	95 % max. (no condensation or dripping water) in accordance with
	IEC/EN 60068-2-30
Mounting	On symmetrical DIN rail, 35 x 7.5 mm and 35 x 15 mm, or on panel (2 x Ø 4 mm)
Screw terminals connection capacity	Flexible wire with ferrule =
	1 conductor : 0.25 to 2.5 mm ² (AWG 24AWG 14)
	2 conductors 0.25 to 0.75 mm ² (AWG 24AWG 18) Semi-rigid wire =
	1 conductor : 0.2 to 2.5 mm ² (AWG 25AWG 14)
	Rigid wire =
	1 conductor : 0.2 to 2.5 mm ² (AWG 25AWG 14)
	2 conductors 0.2 to 1.5 mm ² (AWG 25AWG 16)
	Tightening torque =
	0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm) Also valid for spring cage connectors (ref 88 970 313 and 88 970 317 for the RBT range)
	Also valid for spring cage confidences (let 60 370 313 and 60 370 317 for the NDT range)

General characteristics

,	
Certifications	CE CE
Protection index	IP50 (removable connectors)
Mechanical resistance IEC 61373	Railway applications - Rolling stock Category 1 class B stock mounted on car Vibration resistance : 5-150 Hz Random sampling : 10 minutes in each direction (X, Y, Z) Sinusoidal sampling : 5 hours in each direction (X, Y, Z) Sinusoidal sampling : 3 shocks 3 g/30 ms per direction Dropping : Total of 26 drops on all sides from a height of 1 metre
Mechanical resistance GAM EG 13	Terrestrial military vehicles Vibration resistance 5-500 Hz 50 m/s ² Sinusoidal sampling 5 hours in each direction (X, Y, Z) Shock resistance: Acceleration: 150 m/s ² , duration: 11 ms, 3 shocks per shaft Acceleration: 300 m/s ² , duration: 11 ms, 3 shocks per shaft Bumps: 1000 half wave sine mechanical bumps 25 g/6 ms per shaft
Operating temperature	-30 →+70 °C (DC)
Storage temperature	-40 →+80 °C
Housing	Self-extinguishing UL94V2
Resin	UL approved Self-extinguishing UL94V0 Semi-rigid polyurethane resin Solid black appearance Breakdown voltage: 25 kV/mn Water absorption: 0.2 % (24 hours at 23 °C) Shore D hardness: 50 ±5 Smoke category: F0
Outputs	Removable connectors
Breaking current	6 A relay output

Processing characteristics of CB, CD, XD & XB product types

riocessing characteristics of CB, CD, XD & XB product types			
LCD display	CD, XD : Display with 4 lines of 18 characters		
Programming method	Ladder or FBD/SFC (Grafcet)		
Program size	350 typical blocks		
	128 macros maximum		
	256 blocks maximum per macro		
Program memory	Flash EEPROM		
Removable memory	EEPROM		
Data memory	368 bits/200 words		
Back-up time in the event of power failure	Program and settings in the controller : 10 years Program and settings in the plug-in memory : 10 years Data memory : 10 years		
Cycle time	Ladder : typically 20 ms FBD : 6 →90 ms		
Response time	Input acquisition time + 1 to 2 cycle times		
Clock data retention	10 years (lithium battery) at 25 °C		
Clock drift	Drift < 12 min/year (at 25 °C) 6 s/month (at 25 °C with user-definable correction of drift)		
Timer block accuracy	1 % ± 2 cycle times		
Start up time on power up	< 1,2 s		

Characteristics of products with AC power supplied

Supply		
Nominal voltage	24 V AC	100 →240 V AC
Operating limits	-15 % / +20 % or 20.4 V AC→28.8 V AC	-15 % / +10 % or 85 V AC→264 V AC
Supply frequency range	50/60 Hz (+4 % / -6 %) or 47 →53 Hz/57 →63 Hz	50/60 Hz (+ 4 % / - 6 %) or 47 →53 Hz/57 →63 Hz
Immunity from micro power cuts	10 ms (repetition 20 times)	10 ms (repetition 20 times)
Max. absorbed power	CB12-CD12-XD10-XB10 : 4 VA CB20-CD20 : 6 VA XD10-XB10 with extension - XD26-XB26 : 7.5 VA XD26-XB26 with extension : 10 VA	CB12-CD12-XD10-XB10 : 7 VA CB20-CD20 : 11 VA XD10-XB10 with extension - XD26-XB26 : 12 VA XD26-XB26 with extension : 17 VA
Isolation voltage	1780 V AC	1780 V AC

isolation voltago	1766 776	
Inputs		
Input voltage	24 V AC (-15 % / +20 %)	100 →240 V AC (-15 % / +10 %)
Input current	4.4 mA @ 20.4 V AC 5.2 mA @ 24.0 V AC 6.3 mA @ 28.8 V AC	0.24 mA @ 85 V AC 0.75 mA @ 264 V AC
Input impedance	4.6 kΩ	350 kΩ
Logic 1 voltage threshold	≥ 14 V AC	≥ 79 V AC
Making current at logic state 1	> 2 mA	> 0.17 mA
Logic 0 voltage threshold	≤5 V AC	≤ 20 V AC (≤ 28 V AC : XE10, XR06, XR10, XR14)
Release current at logic state 0	< 0.5 mA	< 0.5 mA
Response time with LADDER programming	50 ms State 0 →1 (50/60 Hz)	50 ms State 0 →1 (50/60 Hz)
Response time with function blocks programming	Configurable in increments of 10 ms 50 ms min. up to 255 ms State $0 \rightarrow 1$ (50/60 Hz)	Configurable in increments of 10 ms 50 ms min. up to 255 ms State 0 \rightarrow 1 (50/60 Hz)
Maximum counting frequency	In accordance with cycle time (Tc) and input response time (Tr) : 1/ ((2 x Tc) + Tr)	In accordance with cycle time (Tc) and input response time (Tr) : 1/ ($(2 \times Tc) + Tr)$
Sensor type	Contact or 3-wire PNP	Contact or 3-wire PNP
Input type	Resistive	Resistive


Isolation between power supply and inputs				
	None		None	
Isolation between inputs	None		None	
Protection against polarity inversions	Yes		Yes	
Status indicator	On LCD screen for CD and XD		On LCD screen for CD and XD	
Characteristics of releventants common to the	-41			
Characteristics of relay outputs common to the e				
Max. breaking voltage	5 →30 V DC			
	24 →250 V AC			
Breaking current	CB-CD-XD10-XB10-XR06-XR10 : 8 A			
	XD26-XB26 : 8 x 8 A relays, 2 x 5 A relays			
	XE10: 4 x 5 A relays			
	XR14: 4 x 8 A relays, 2 x 5 A relays RBT (Removable Terminal Blocks) versions	· verify the maximum o	urrent according to the type of connection u	isad
Electrical durability for 500 000 operating cycles	Utilization category DC-12 : 24 V, 1.5 A	. verily the maximum c	urrent according to the type of connection t	useu
Electrical durability for 500 000 operating cycles	Utilization category DC-12 : 24 V, 1.5 A Utilization category DC-13 : 24 V (L/R = 10 n	ac) 0.6.A		
	Utilization category AC-12: 230 V, 1.5 A			
	Utilization category AC-12 : 230 V, 1.3 A			
Max. Output Common Current	12 A for O8, O9, OA			
·				
Minimum switching capacity	10 mA (at minimum voltage of 12 V)			
Minimum load	12 V, 10 mA			
Maximum rate	Off load : 10 Hz			
	At operating current : 0.1 Hz			
Mechanical life	10,000,000 (operations)			
Voltage for withstanding shocks	In accordance with IEC/EN 60947-1 and IEC/	EN 60664-1 : 4 kV		
Response time	Make 10 ms			
	Release 5 ms			
Built-in protections	Against short-circuits : None			
	Against overvoltages and overloads : None			
Status indicator	On LCD screen for CD and XD			
Characteristics of product with DC news are "-	d			
Characteristics of product with DC power supplie	·u			
Supply				
Nominal voltage	12 V DC	24 V DC		
Operating limits	-13 % / +20 %	-20 % / +25 %		
	or 10.4 V DC→14.4 V DC (including ripple)	or 19.2 V DC→30 V I	OC (including ripple)	
Immunity from micro power cuts	≤ 1 ms (repetition 20 times)	≤ 1 ms (repetition 20	` ' '	
Max. absorbed power	CB12 with solid state outputs : 1.5 W		th solid state outputs - XD10-XB10 with sol	lid state outputs : 3 W
wax. absorbed power	CD12: 1.5 W	XD10-XB10 with rela	•	iid state outputs . 5 W
	CD20 : 2.5 W	XD26-XB26 with soli	•	
	XD26-XB26 : 3 W			
		CB20-CD20 with rela	v outbuls - ADZ6 with relav outbuls . 6 w	
			y outputs - XD26 with relay outputs : 6 W ension : 8 W	
	XD26-XB26 with extension : 5 W	XD10-XB10 with exte	ension : 8 W	
Protection against polarity inversions	XD26-XB26 with extension : 5 W XD26 with solid state outputs : 2.5 W	XD10-XB10 with exte	ension : 8 W	
Protection against polarity inversions	XD26-XB26 with extension : 5 W	XD10-XB10 with exte	ension : 8 W	
Protection against polarity inversions Digital inputs (I1 to IA and IH to IY)	XD26-XB26 with extension : 5 W XD26 with solid state outputs : 2.5 W Yes	XD10-XB10 with exte	ension : 8 W	
	XD26-XB26 with extension : 5 W XD26 with solid state outputs : 2.5 W	XD10-XB10 with exte	ension : 8 W	
Digital inputs (I1 to IA and IH to IY)	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC	XD10-XB10 with exte	ension : 8 W ension : 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC	
Digital inputs (I1 to IA and IH to IY) Input voltage	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC	
Digital inputs (I1 to IA and IH to IY) Input voltage	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC	XD10-XB10 with exte	ension : 8 W ension : 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC	
Digital inputs (I1 to IA and IH to IY) Input voltage	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance	XD26-XB26 with extension : 5 W XD26 with solid state outputs : 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold	XD26-XB26 with extension : 5 W XD26 with solid state outputs : 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA	XD10-XB10 with exte	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times	XD10-XB10 with exter XD26-XB26 with exter Yes	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kQ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times	i to 6 k Hz)
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up	
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance v	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr)	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) +	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + Contact or 3-wire PNP	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + Contact or 3-wire PNP Type 1	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1) Contact or 3-wire PNP Type 1 Resistive	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1) (3 x Tc) (3 x Tc) (4 x Tc) (4 x Tc) (5 x Tc) (5 x Tc) (5 x Tc) (6 x Tc) (7 x Tc) (with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1/2 Contact or 3-wire PNP Type 1 Resistive None None	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation against polarity inversions	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1) (3 x Tc) (3 x Tc) (4 x Tc) (4 x Tc) (5 x Tc) (5 x Tc) (5 x Tc) (6 x Tc) (7 x Tc) (with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1/2 Contact or 3-wire PNP Type 1 Resistive None None	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation against polarity inversions Status indicator	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance v input response time (Tr) : 1/ ((2 x Tc) + Type 1 Resistive None None Yes	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG)	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1 Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1) (Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG)	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1 Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1) (Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1) (Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IE	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance v input response time (Tr) : 1/ ((2 x Tc) + 1) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs 11 & 12: Ladder (1 k Hz) & FBD (up to Inputs 13 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IE 6 inputs IB →IG	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1/2 Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max.	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance v input response time (Tr) : 1/ ((2 x Tc) + Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max.	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input voltage Input voltage Value of LSB	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance v input response time (Tr) : 1/ ((2 x Tc) + Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	ansion: 8 W ansion: 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY: In accordance vinput response time (Tr): 1/ ((2 x Tc) + Contact or 3-wire PNP Type 1 Resistive None None None Ves On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution Conversion time	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	ansion: 8 W ansion: 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY: In accordance vinput response time (Tr): 1/ ((2 x Tc) + Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution Conversion time Accuracy at 25 °C	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 %	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	ansion: 8 W ansion: 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY: In accordance vinput response time (Tr): 1/ ((2 x Tc) + 1) (Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 %	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution Conversion time	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	ansion: 8 W ansion: 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY: In accordance vinput response time (Tr): 1/ ((2 x Tc) + Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Inputs used as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution Conversion time Accuracy at 25 °C	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 %	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	ansion: 8 W ansion: 10 W 24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I1 & I2: Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY: In accordance vinput response time (Tr): 1/ ((2 x Tc) + 1) (Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 %	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Input sused as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution Conversion time Accuracy at 25 °C Accuracy at 25 °C Accuracy at 55 °C	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 % ± 6.2 %	XD10-XB10 with external XD26-XB26 with external Yes 6 k Hz)	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1 Contact or 3-wire PNP Type 1 Resistive None None Yes On LCD screen for CD and XD 4 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 % ± 6.2 %	with cycle time (Tc) and
Digital inputs (I1 to IA and IH to IY) Input voltage Input current Input impedance Logic 1 voltage threshold Making current at logic state 1 Logic 0 voltage threshold Release current at logic state 0 Response time Maximum counting frequency Sensor type Conforming to IEC/EN 61131-2 Input type Isolation between power supply and inputs Isolation between inputs Protection against polarity inversions Status indicator Analogue or digital inputs (IB to IG) CB12-CD12-XD10-XB10 CB20-CD20-XB26-XD26 Input sused as analogue inputs Measurement range Input impedance Input voltage Value of LSB Input type Resolution Conversion time Accuracy at 25 °C Accuracy at 25 °C Repeat accuracy at 55 °C Repeat accuracy at 55 °C	XD26-XB26 with extension: 5 W XD26 with solid state outputs: 2.5 W Yes 12 V DC (-13 % / +20 %) 3.9 mA @ 10.44 V DC 4.4 mA @ 12.0 V DC 5.3 mA @ 14.4 VDC 2.7 kΩ ≥ 7 V DC ≥ 2 mA ≤ 3 V DC < 0.9 mA 1 →2 cycle times Inputs I1 & I2: Ladder (1 k Hz) & FBD (up to Inputs I3 to IA & IH to IY: In accordance with input response time (Tr): 1/ ((2 x Tc) + Tr) Contact or 3-wire PNP Type 1 Resistive None None None Yes On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 14 kΩ 14.4 V DC max. 14 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 % ± 6.2 % ± 2 %	XD10-XB10 with extex XD26-XB26 with extex Yes 6 k Hz) 6 cycle time (Tc) and	24 V DC (-20 % / +25 %) 2.6 mA @ 19.2 V DC 3.2 mA @ 24 V DC 4.0 mA @ 30.0 VDC 7.4 kΩ ≥ 15 V DC ≥ 2.2 mA ≤ 5 V DC < 0.75 mA 1 →2 cycle times Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up Inputs I3 to IA & IH to IY : In accordance vinput response time (Tr) : 1/ ((2 x Tc) + 1 COntact or 3-wire PNP Type 1 Resistive None None Ves On LCD screen for CD and XD 4 inputs IB →IE 6 inputs IB →IG (0 →10 V) or (0 →V power supply) 12 kΩ 30 V DC max. 29 mV, 4 mA Common mode 10 bits at max. input voltage Controller cycle time ± 5 % ± 6.2 % ± 2 %	with cycle time (Tc) and Tr)

11/03/2013		www.crouzet.com
Potentiometer control	2.2 kΩ/0.5 W (recommended)	2.2 kΩ/0.5 W (recommended)
	10 kΩ max.	10 kΩ max.
Inputs used as digital inputs		
Input voltage	12 V DC (-13 % / +20 %)	24 V DC (-20 % / +25 %)
Input current	0.7 mA @ 10.44 VDC	1.6 mA @ 19.2 VDC
	0.9 mA @ 12.0 VDC	2.0 mA @ 24.0 V DC
	1.0 mA @ 14.4VDC	2.5 mA @ 30.0 VDC
Input impedance	14 kΩ	12 kΩ
Logic 1 voltage threshold	≥7 V DC	≥ 15 VDC
Making current at logic state 1	≥ 0.5 mA	≥ 1.2 mA
Logic 0 voltage threshold	≤3 V DC	≤5 V DC
Release current at logic state 0	≤ 0.2 mA	≤ 0.5 mA
Response time	1 →2 cycle times	1 →2 cycle times
Maximum counting frequency	In accordance with cycle time (Tc) and input response time (Tr):	In accordance with cycle time (Tc) and input response time (Tr):
	1/ ((2 x Tc) + Tr)	1/ ((2 x Tc) + Tr)
Sensor type	Contact or 3-wire PNP	Contact or 3-wire PNP
Conforming to IEC/EN 61131-2	Type 1	Type 1
Input type	Resistive	Resistive
Isolation between power supply and inputs	None	None
Isolation between inputs	None	None
Protection against polarity inversions	Yes	Yes
Status indicator	On LCD screen for CD and XD	On LCD screen for CD and XD
Characteristics of relay outputs common to the	entire range	
Max. breaking voltage	5 →30 V DC	
	24 →250 V AC	
Max. Output Common Current	12A (10A UL) for O8, O9, OA	
Breaking current	CB-CD-XD10-XB10-XR06-XR10: 8 A	
	XD26-XB26: 8 x 8 A relays, 2 x 5 A relays	
	XE10: 4 x 5 A relays	
Floatrical durability for E00 000 apprating avaloa	XR14: 4 x 8 A relays, 2 x 5 A relays	
Electrical durability for 500 000 operating cycles	Utilization category DC-12 : 24 V, 1.5 A Utilization category DC-13 : 24 V (L/R = 10 ms), 0.6 A	
	Utilization category AC-12 : 230 V, 1.5 A	
	Utilization category AC-15 : 230 V, 0.9 A	
Minimum switching capacity	10 mA (at minimum voltage of 12 V)	
Minimum load	12 V, 10 mA	
Maximum rate	Off load : 10 Hz	
	At operating current : 0.1 Hz	
Mechanical life	10,000,000 (operations)	
Voltage for withstanding shocks	In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV	
Response time	Make 10 ms	
	Release 5 ms	
Built-in protections	Against short-circuits : None	
	Against overvoltages and overloads : None	
Status indicator	On LCD screen for CD and XD	
Digital / PWM solid state output		
PWM solid state output*	CB12: O4	CD12-XD10-XB10 : O4
	XD26 : O4 →O7	CD20-XD26-XB26 : O4 →O7
* Only available with "FBD" programming language	* Only available with "FBD" programming language	
Breaking voltage	10.4 →30 V DC	19.2 →30 V DC
Nominal voltage	12-24 VDC	24 V DC
Nominal current	0.5 A	0.5 A
Max. breaking current	0,625 A	0,625 A
Voltage drop	≤ 2 V for I = 0.5 A (at state 1)	≤ 2 V for I = 0.5 A (at state 1)
Response time	Make ≤ 1 ms	Make ≤ 1 ms
F(11)	Release ≤ 1 ms	Release ≤ 1 ms
Frequency (Hz)		
Built-in protections	Against overloads and short-circuits : Yes	Against overloads and short-circuits : Yes
	Against overvoltages (*) : Yes Against inversions of power supply : Yes	Against overvoltages (*) : Yes Against inversions of power supply : Yes
	(*) In the absence of a volt-free contact between the logic	(*) In the absence of a volt-free contact between the logic
	controller output and the load	controller output and the load
Min. load	1 mA	1 mA
Maximum incandescent load	0,2 A / 12 V DC	
	0,1 A / 24 V DC	0,1 A / 24 V DC
Galvanic isolation	No	No
PWM frequency	14.11 Hz	14.11 Hz
	56.45 Hz	56.45 Hz
	112.90 Hz	112.90 Hz
	225.80 Hz	225.80 Hz
	451.59 Hz	451.59 Hz 1806 37 Hz
DWM evelie ratio	1806.37 Hz	1806.37 Hz
PWM cyclic ratio	0 →100 % (256 steps for CD, XD and 1024 steps for XA)	0 →100 % (256 steps for CD, XD and 1024 steps for XA)
Max. Breaking current PWM	50 mA	50 mA
Max. cable length PWM (m)	20 C 5 % (20 % 190 %) load at 10 mA	20 < 5 % (20 % , 20 %) load at 10 mA
PWM accuracy at 500 Hz	< 5 % (20 % →80 %) load at 10 mA	< 5 % (20 % → 80 %) load at 10 mA
PWM accuracy at 500 Hz	< 10 % (20 % →80 %) load at 10 mA	< 10 % (20 % →80 %) load at 10 mA
Status indicator	On LCD screen for XD	On LCD screen for CD and XD

Accessories

Туре	Description	Code
M3 SOFT	Multilingual programming software containing specific library functions (CD-ROM)	88970111
PA	1,80 m serial link cable : DB9 M / DB9 F	88970123
PA	PC : USB →DB9 (RS 232) link cable	88950105
MA	Removable connector kit for NBR32	88970315

Dimensions (mm)

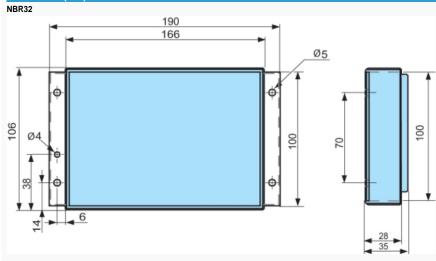

mm

Product adaptations



- 40 cm wire
- Extended power supply range (9 \rightarrow 18 VDC), (16 \rightarrow 36 VDC), (85 \rightarrow 264 V AC)
- Remote polyester keyboard
- UL, CSA, GL certification
- Integration of all available electrical functions in the catalogue (e.g. : Bluetooth module, Pt 100 input, 0-20 mA input, 0-10 V power output, etc.
- Changing the number of I/O.