

4112-9212 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



50 Ω TERMINATED 18 GHz SMA N/O S.P.6 T. SWITCH

Page
1 / 2

OPTIONS: INDICATOR / TTL DRIVE / SUPP.DIODES

R F CHARACTERISTICS

NUMBER OF WAYS : 6
FREQUENCY RANGE : 0 - 18 GHz
IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3	3 - 8	8 -12.4	12.4- 18
V.S.W.R <=	1.20	1.30	1.40	1.50
INSERT. LOSS <=	0.20 dB	0.30 dB	0.40 dB	0.50 dB
ISOLATION >=	80 dB	70 dB	60 dB	60 dB
AVER. POWER (*)	240 W	150 W	120 W	100 W

TERMINATION IMPEDANCE : 50 Ohms
TERMINATION AVG. POWER AT 25° C : 1 W per termination
3 W total power

ELECTRICAL CHARACTERISTICS

ACTUATOR : NORMALLY OPEN
NOMINAL CURRENT AT 25° C (*10%) : 102 mA
ACTUATOR VOLTAGE (Vcc) : 28V (24 to 30V) / NEGATIVE COMMON
TERMINALS : solder pins (250°C max./30 sec.)
INDICATOR RATING : 1 W / 30 V / 100 mA
TTL INPUTS (E) - High level : 2.2 to 5.5V / 800 μ A at 5V
- Low level : 0 to 0.8V / 20 μ A at 0.8V

MECHANICAL CHARACTERISTICS



CONNECTORS : SMA female per MIL-C 39012
LIFE : 2.000.000 cycles per position
SWITCHING TIME (nominal voltage;25° C) : < 15 ms
CONSTRUCTION : splashproof
WEIGHT : < 250 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25° C per RF path)

General tolerance: $\pm 0,5$ mm

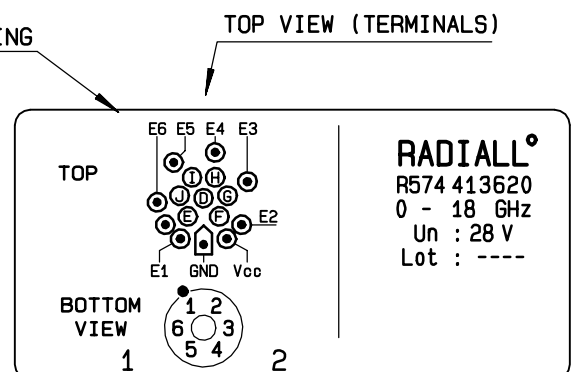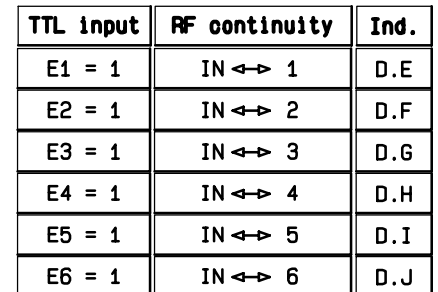

The diagram illustrates the internal circuitry of the TTL-DRIVE module. It features a central control block labeled 'TTL-DRIVE'. This block has six power input terminals (E1 through E6) and one output terminal (D). The output terminal D is connected to a common line that branches into six indicator lamps (E, F, G, H, I, J). Each lamp is connected to a common ground line. Below the lamps are six actuators (coils) connected to the common ground line. Each actuator is connected to a common line that branches into six RF inputs (1-6). Each RF input is connected to a common ground line. The diagram also shows power input terminals Vcc and GND.