
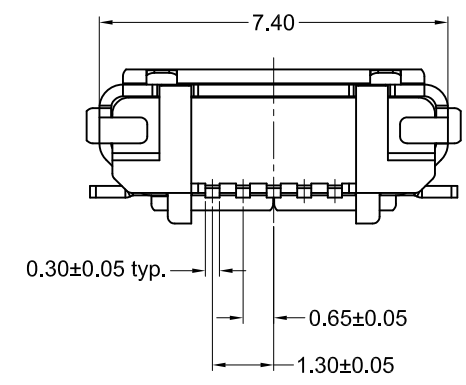
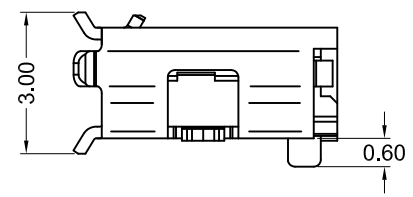
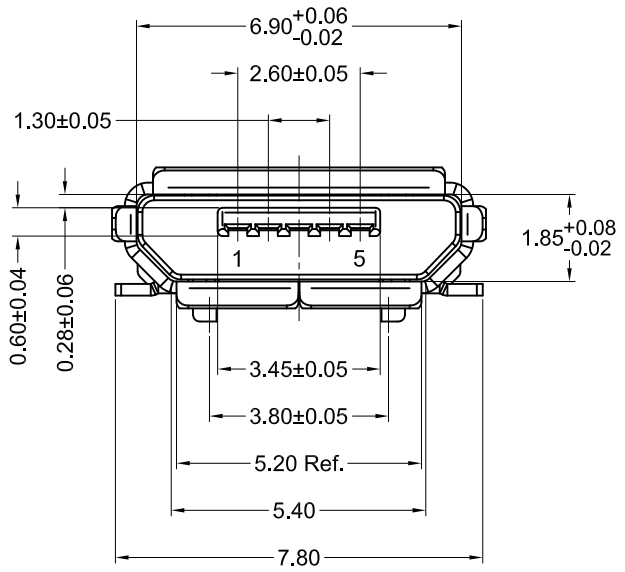
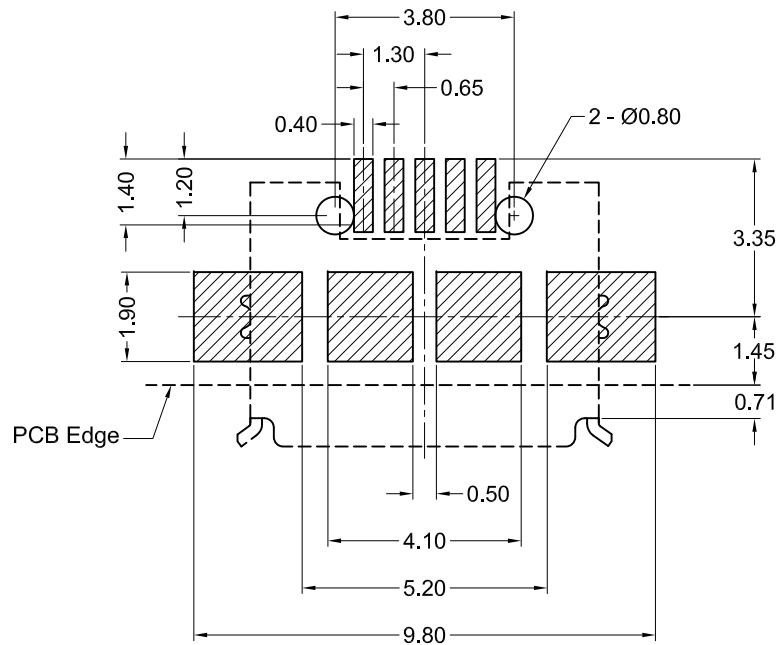


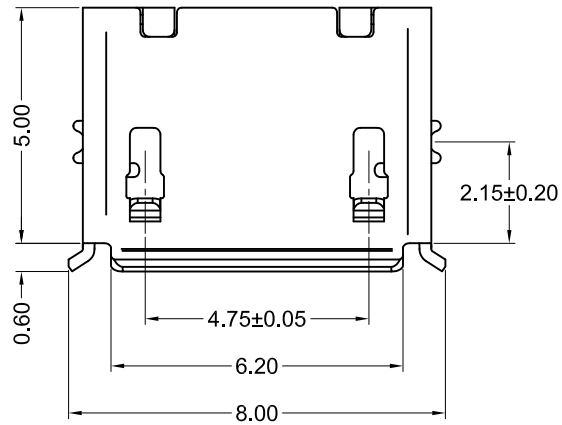

Material and Finish

Housing: High Temp., Thermoplastics
Color - Black

Contacts: Copper Alloy,
30u" gold plated on entire contact

Shell: Stainless Steel, Nickel plated

Electrical Specifications

Rated Current: 1.5A Max.

Rated Voltage: 5V AC (rms Max.)

Insulation Resistance:
1000 megohms Min.

Contact Resistance:
30 milliohms max.

Dielectric Withstanding Voltage:
100V AC

Operating Temperature:
-30°C to +85°C

RoHS COMPLIANT
EU Directive 2002/95/EC

UL
E134345

CS
LR78160

Tolerances
X.X ± 0.35
X.XX ± 0.25
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	10/18/07	New Drawing	A. Frederick	H. MA	A. Frederick	08/17/07
A1	12/12/07	Release Drawing	H. MA	N/A		
A2	02/27/12	ECO #12-009	S. Vien	H. MA		
A3	01/16/13	ECO #12-063	S. Vien	P. DalCanto		
A4	04/26/13	ECO #13-019	W. Cook	P. DalCanto		

KMMX-BSMT5SB-30TR

Micro USB, Type-B, SMT, 30u" Gold

Black Insulator, RoHS Compliant

