



LED Display

Product Data Sheet

LTP-2058AKD

Spec No.: DS30-2002-082

Effective Date: 04/03/2002

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

FEATURES

- * 2.3 inch (58.42 mm) MATRIX HEIGHT.
- * LOW POWER REQUIREMENT.
- * SINGLE PLANE, WIDE VIEWING ANGLE
- * SOLID STATE RELIABILITY.
- * 5x8 ARRAY WITH X-Y SELECT.
- * COMPATIBLE WITH USASCLL AND EBCDIC CODES.
- * STACKABLE HORIZONTALLY.
- * CATEGORIZED FOR LUMINOUS INTENSITY.


DESCRIPTION

The LTP-2058AKD is a 2.3 inch (58.42 mm) matrix height 5x8 dot matrix display. This device utilizes AlInGaP Hyper Red LED chips, which are made from AlInGaP on a non-transparent GaAs substrate, and has a gray face and white segments.

DEVICE


PART NO.	DESCRIPTION
AlInGaP Hyper Red	Anode Column
LTP-2058AKD	Cathode Row

PACKAGE DIMENSIONS

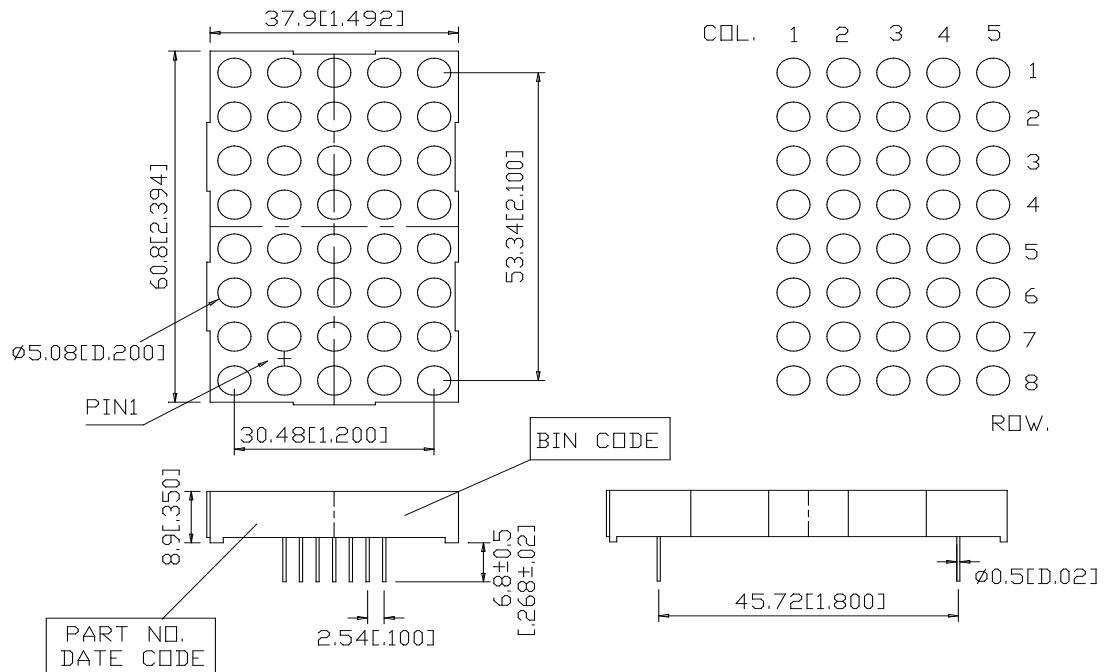

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

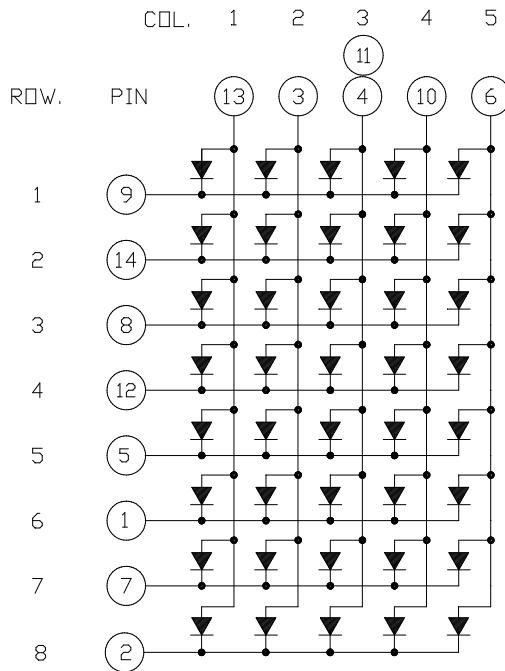

PIN CONNECTION

NO.	CONNECTION
1	CATHODE ROW 6
2	CATHODE ROW 8
3	ANODE COL. 2
4	ANODE COL. 3
5	CATHODE ROW 5
6	ANODE COL. 5
7	CATHODE ROW 7
8	CATHODE ROW 3
9	CATHODE ROW 1
10	ANODE COL. 4
11	ANODE COL. 3
12	CATHODE ROW 4
13	ANODE COL. 1
14	CATHODE ROW 2

ABSOLUTE MAXIMUM RATING AT $T_A=25^\circ\text{C}$

PARAMETER	MAXIMUM RATING	UNIT
Average Power Dissipation Per Dot	40	mW
Peak Forward Current Per Dot	90	mA
Average Forward Current Per Dot	15	mA
Derating Linear From 25°C Per Dot	0.2	mA/ $^\circ\text{C}$
Reverse Voltage Per Dot	5	V
Operating Temperature Range	-35°C to $+85^\circ\text{C}$	
Storage Temperature Range	-35°C to $+85^\circ\text{C}$	
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds	260°C	

ELECTRICAL / OPTICAL CHARACTERISTICS AT $T_A=25^\circ\text{C}$

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I_v	1650	3500		μcd	$I_p=32\text{mA}$ 1/16DUTY
Peak Emission Wavelength	λ_p		650		nm	$I_F=20\text{mA}$
Spectral Line Half-Width	$\Delta\lambda$		20		nm	$I_F=20\text{mA}$
Dominant Wavelength	λ_d		639		nm	$I_F=20\text{mA}$
Forward Voltage any Dot	V_F		2.1	2.6	V	$I_F=20\text{mA}$
			2.3	2.8	V	$I_F=80\text{mA}$
Reverse Current any Dot	I_R			100	μA	$V_R=5\text{V}$
Luminous Intensity Matching Ratio	$I_v\text{-m}$			2:1		$I_p=32\text{mA}$ 1/16DUTY

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

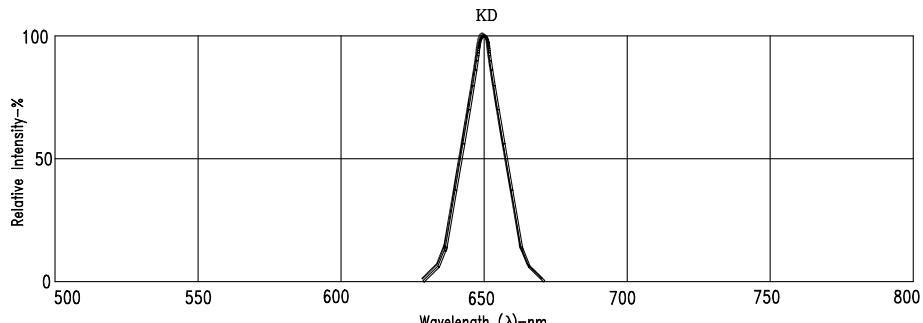


Fig1. RELATIVE INTENSITY VS. WAVELENGTH





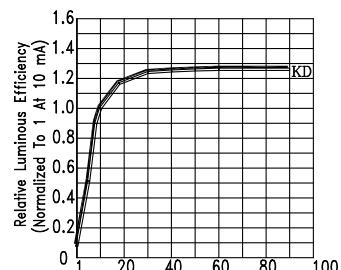


Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)

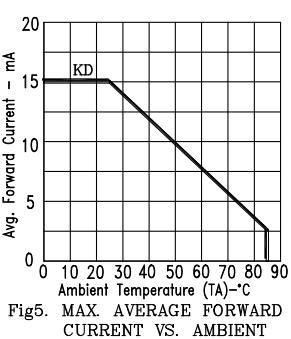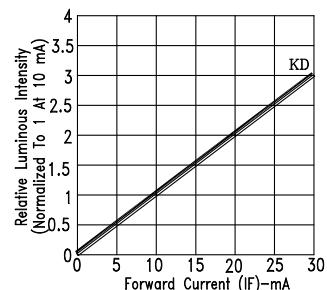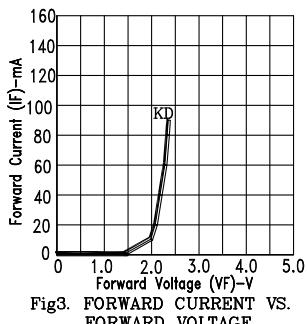

NOTE : KD=AlInGaP HYPER RED

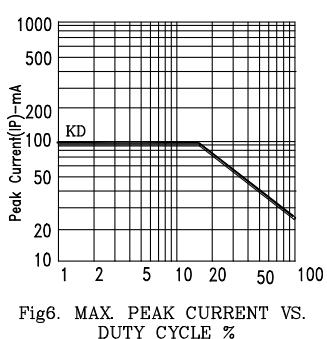

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lite-On:](#)

[LTP-2058AKD](#)