

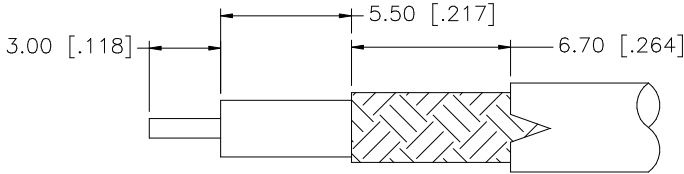
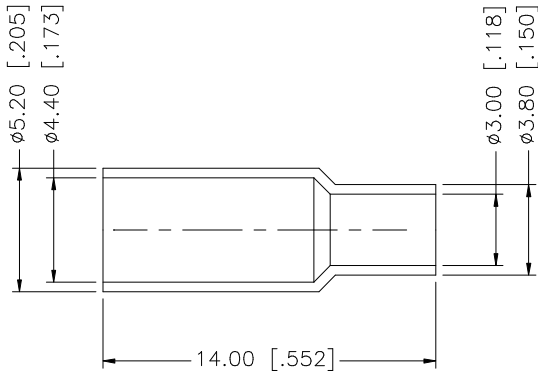
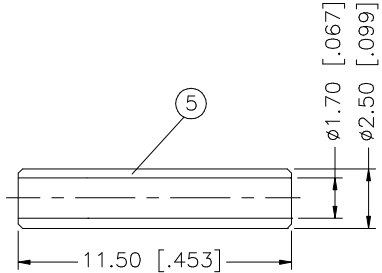


REV.	DATE	DESCRIPTION
NC	02/23/98	INITIAL RELEASE
A	11/13/06	UPDATE DRAWING FORMAT

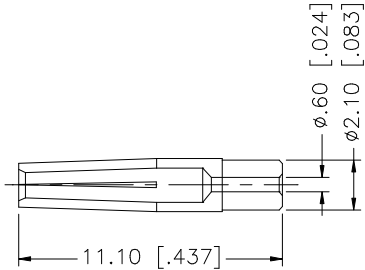

RECOMMENDED
CABLE STRIPPING DIM'S

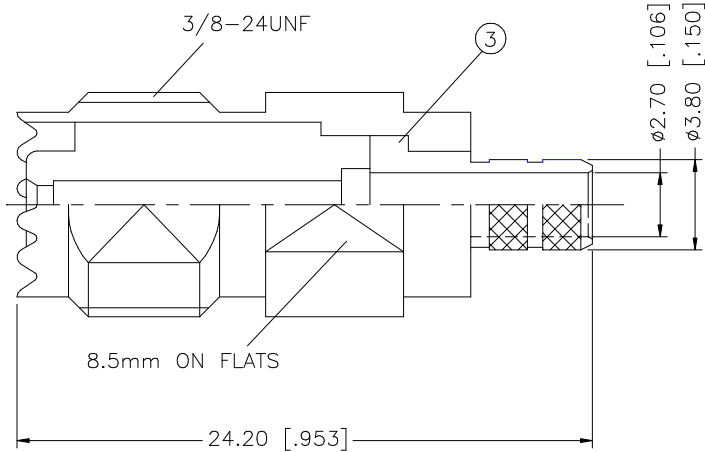

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						11/13/06
6	FERRULE	BRASS	NICKEL	1		CHECKED							
5	INSULATOR	DELRIN	NATURAL	1		ISSUED			PART DESCRIPTION MINI-UHF CRIMP JACK (RG-174/U, 316/U, CABLE)				
4	CONTACT PIN	PHOS. BRONZE	GOLD	1		SHEET	1 OF 1						
3	INSULATOR	DELRIN	NATURAL	1					PART NO. 182117				
2	BARREL	BRASS	NICKEL	1									
1	BODY	DIE CAST	NICKEL	1		CAD FILE C:/182/182117.DWG			DWG. NO. 182117.DWG		REV. A	SIZE A	SCALE NA
	DESCRIPTION	MATERIAL	FINISH	QTY									