





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	01FEB2016	DW	CW

NOTES:

- I. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
FLAMMABILITY: UL94V-0
OPERATION TEMPERATURE: -40°C~+125°C

注释:

- I. 技术参数:
绝缘材料: PC
阻燃等级: UL94V-0
工作温度: -40°C~+125°C

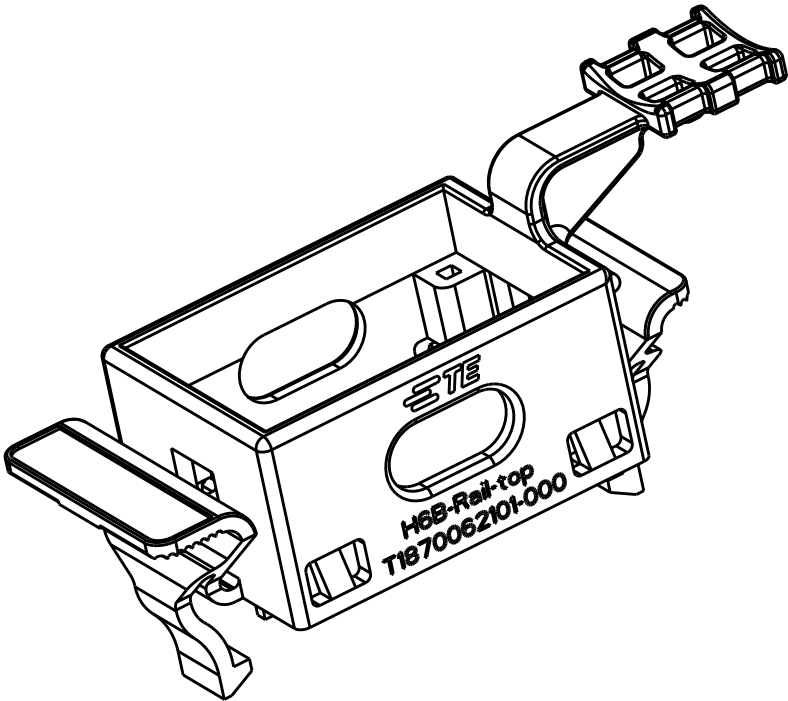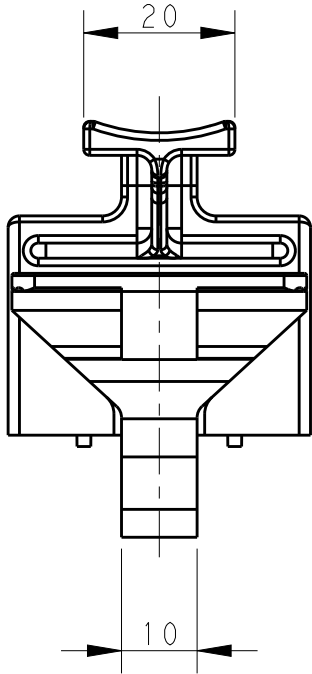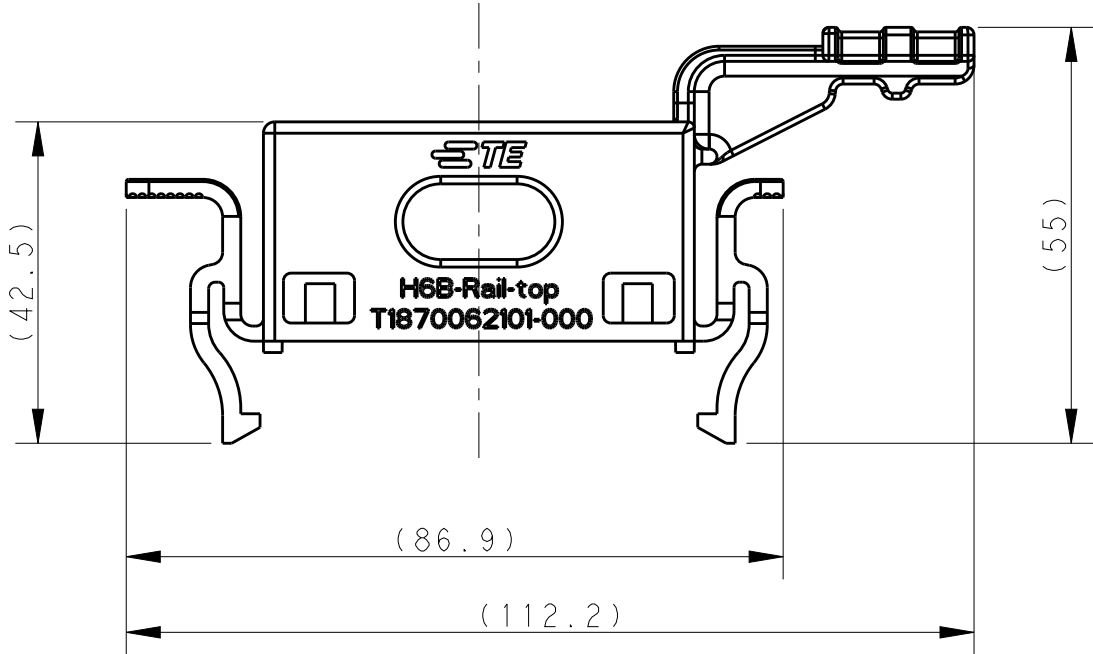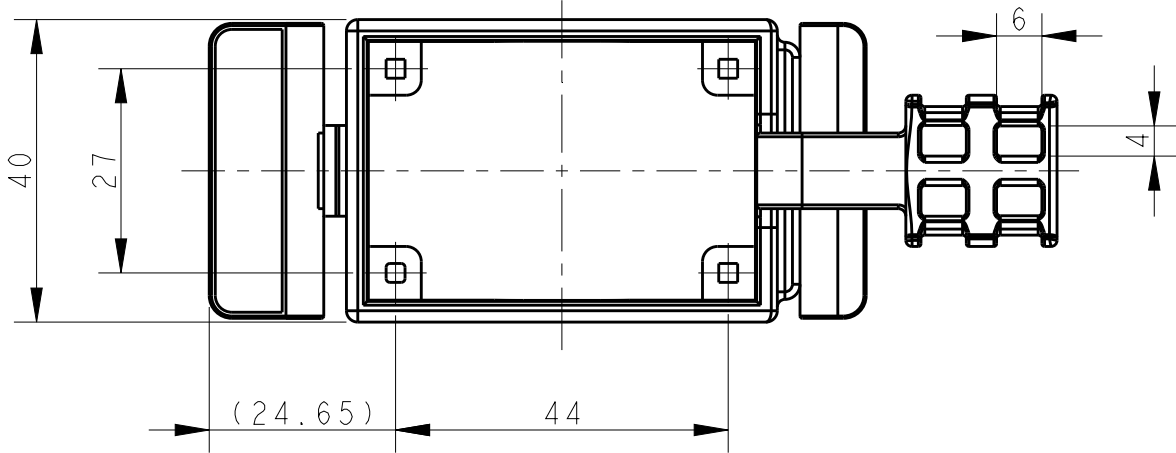

T1870062101-000	H6B-RAIL-TOP	H6B INSERT MOUNTING TOP FRAME H6B 芯件导轨安装支架上部
PART NUMBER 料 号	PART DESCRIPTION 描 述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 01FEB2016	TE TE Connectivity H6B-RAIL-TOP		
DIMENSIONS: mm		CHK CHRIS WANG 01FEB2016			
		APVD XIANG XU 01FEB2016			
		PRODUCT SPEC			
MATERIAL	TOLERANCES UNLESS OTHERWISE SPECIFIED:	1 PLC ±-	APPLICATION SPEC	SIZE	CAGE CODE
		2 PLC ±-			
		3 PLC ±-			
	FINISH	4 PLC ±-	WEIGHT	DRAWING NO	RESTRICTED TO
		ANGLES ±-			
-	-	-	-	A300779	-
-	-	-	-	C-T1870062101000	-
CUSTOMER DRAWING			SCALE	SHEET	REV
			1:1	1 OF 1	A