


# Thin Film Pyroelectric Flame Sensor

## Introduction

The Pyreos thin film pyroelectric flame detectors offer exceptionally high responsivity, a wide field of view of typically 100° (\*subject to filter band pass specification) and class leading rapid recovery from thermal and electrical shocks (<1 second downtime). This current mode sensor has excellent signal to noise at the signature 8-10 Hz flicker range of a flame, and can provide accurate discrimination of flame sources in triple IR flame detection systems. The sensor element is built into a low noise circuit that has an internal CMOS op amp with a 10GΩ feedback resistor outputting a voltage signal centred around half the supply rail.

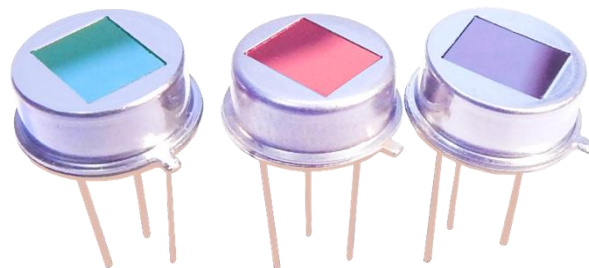

### Sensor Characteristics

|                           |                                |
|---------------------------|--------------------------------|
| Filter aperture           | 5.2 mm x 4.2 mm                |
| Element size              | 1000 μm x 1000 μm              |
| Package                   | TO39                           |
| Responsivity <sup>1</sup> | 150,000 V/W                    |
| D* <sup>1</sup>           | 3.5 x 10 <sup>8</sup> cm√Hz/ W |
| Noise <sup>1</sup>        | Mean 70 μV/√Hz                 |
| Field of View             | Typical 100° <sup>2</sup>      |

<sup>1</sup>10 Hz, 500 K, room temperature, without window and optics


<sup>2</sup>With reference to filter used in PY0573

### Electrical Characteristics

|   |                                     |
|---|-------------------------------------|
| Max. Voltage (+V)                         | 8.0 V                               |
| Min. Voltage (+V)                         | 2.7 V                               |
| Output voltage normalised around mid-rail |                                     |
| Microphonics                              | S <sub>vib</sub> ~2 μV/√Hz at 10 Hz |
| Time Constant                             | ~12 ms                              |
| Operating Temperature                     | -40 to +85 °C                       |
| Storage Temperature                       | -40 to +110 °C                      |
| Op-Amp with 10 GΩ feedback resistor       |                                     |

|        |                                |
|--------|--------------------------------|
| Filter | As per Filters Available table |
|--------|--------------------------------|

## Frequency Characteristics

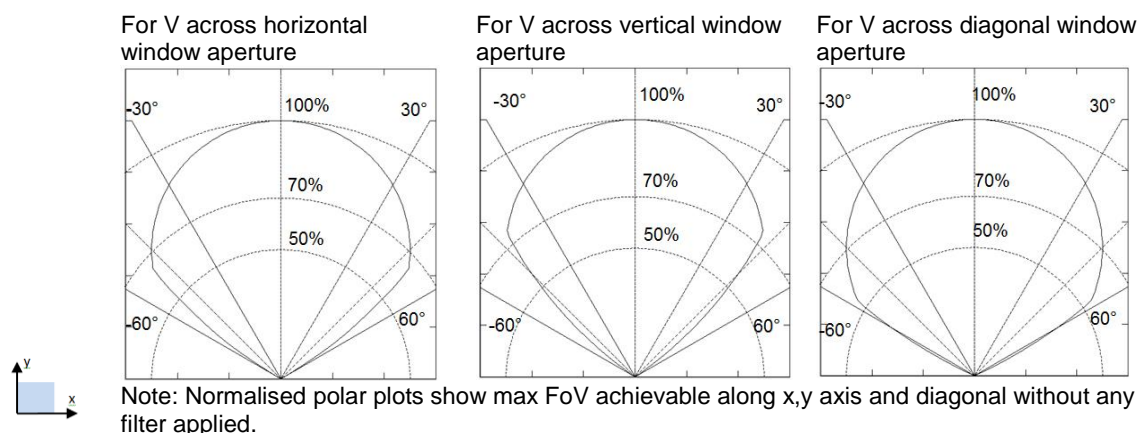


Please note: the information contained in this document is subject to change without further notification. Pyreos reserves the right to alter the performance and any resulting specification. Pyreos may choose not to supply any engineering sample devices as a commercial product. No responsibility is accepted for any consequential loss incurred. Pyreos Ltd, SMC, Alexander Crum Brown Road, Edinburgh EH9 3FF, UK. Tel: +441316507009, [www.pyreos.com](http://www.pyreos.com)

## Order Information

Please quote PY-ITV-FLAME-TO39(2+1) and your desired filter combination or quote specific part number PYXXXX as per filter table.

Contact: [sales@pyreos.com](mailto:sales@pyreos.com)

## Package Information

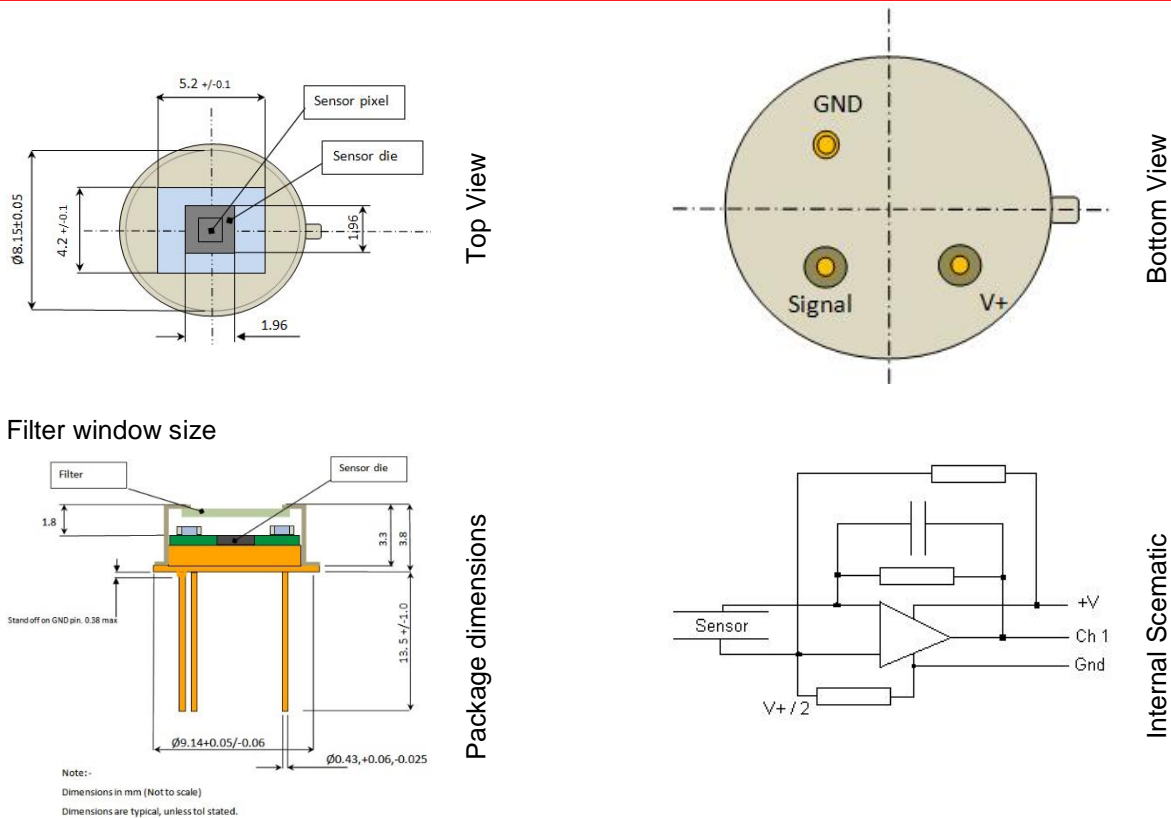

Note: Ensure that the sensor base is not in contact with the PCB in order to avoid shorts.

## Filters Available

| Part number                     | PY1580           | PY0575           | PY0573           | PY1600           | PY0574            | PY1601        | PY0576        |
|---------------------------------|------------------|------------------|------------------|------------------|-------------------|---------------|---------------|
| Filter name                     | 3.38 µm bandpass | 3.91 µm bandpass | 4.35 µm bandpass | 4.48 µm bandpass | 4.55 µm band pass | 5.0 µm cut on | 5.5 µm cut on |
| Cut on wavelength typical (µm)  | 3.295            | 3.865            | 4.05             | 4.17             | 4.34              | 5.0           | 5.5           |
| Cut off wavelength typical (µm) | 3.475            | 3.955            | 4.65             | 4.79             | 4.76              | -             | -             |

Note: An additional window is required to provide high wavelength blocking (above 8.0 µm) and thermal shielding.

Please note: the information contained in this document is subject to change without further notification. Pyreos reserves the right to alter the performance and any resulting specification. Pyreos may choose not to supply any engineering sample devices as a commercial product. No responsibility is accepted for any consequential loss incurred. Pyreos Ltd, SMC, Alexander Crum Brown Road, Edinburgh EH9 3FF, UK. Tel: +441316507009, [www.pyreos.com](http://www.pyreos.com)