
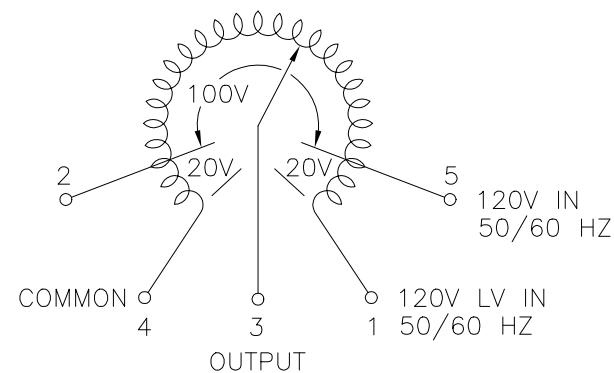


.88 [22.2] DIA. KNOCKOUT  
(3) PLACES FOR  
WIRING CONNECTIONS

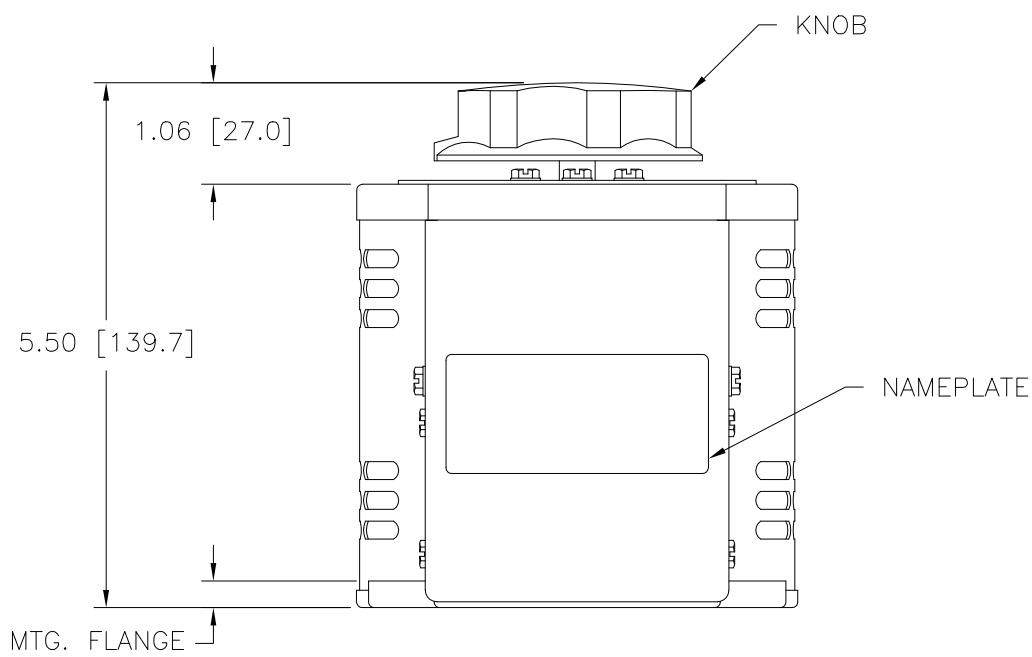

OUTPUT  
SCHEMATIC  
VIEW FROM BASE END  
FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END			
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT
SINGLE PHASE	120	50/60	0-120	10	1.2	13	1.56	CW	1-4	---	4-3
			0-140	10	1.4	---	---	CCW	1-4	---	1-3
								CW	4-5	---	4-3
			CCW	1-2	---	1-3					

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±  
DECIMALS HOLES .002 ANGLES 1° DRAFT 1-1/2°  
.XX .0000 .06 .005 .005

MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPEC. CONTROL DRAWING  
VARIABLE TRANSFORMER  
MODEL: 1010BCT

DRAWN BY: S.A. SMITH DATE: 9/17/97  
CHECKER: DATE: WEIGHT APPROX. 10.25 LBS  
ENGINEER: DATE: SCALE 1=1 SHEET 1 OF 1

DO NOT SCALE DWG. CAGE CODE 83008  
SCALE 1=1 SHEET 1 OF 1

