




DIMENSIONS

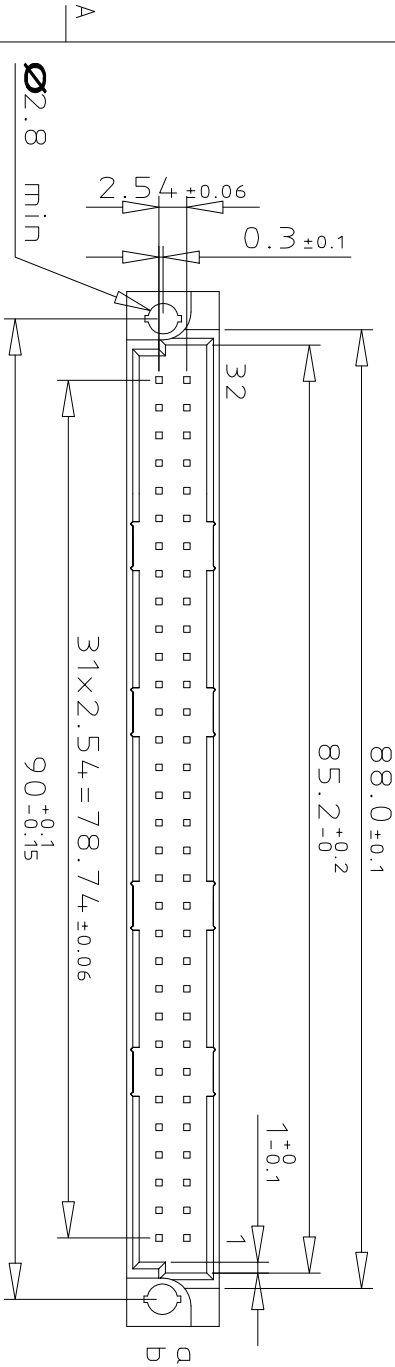

P/N PRINTING
DATE CODE PRINTING
YY-YEAR, XX-WEEK

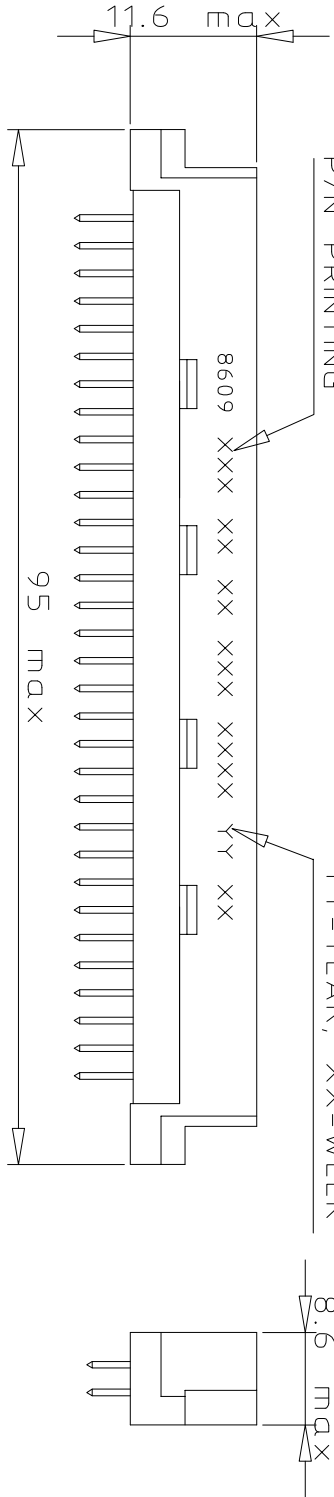


TERMINATION

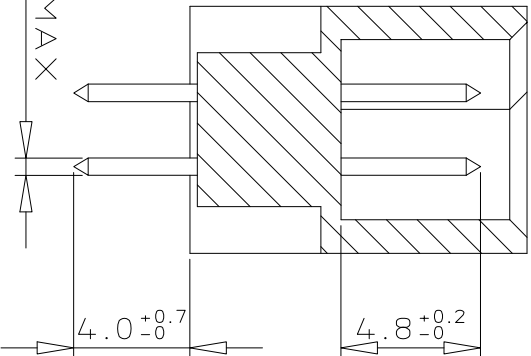

ORDERING INFORMATION

SERIES	8609	2	64	5	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	b	-	-	-	-	-	-	-	-	2
ROW a	-	-	-	-	-	-	-	-	-	1
NO. OF CONTACTS										
TYPE OF INSULATOR										
2 ROW MALE INSULATOR										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE a										
TERMINATION										
STRAIGHT SPILL										
OPTIONS										
NO OPTION										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										
ELF										

PCB LAYOUT

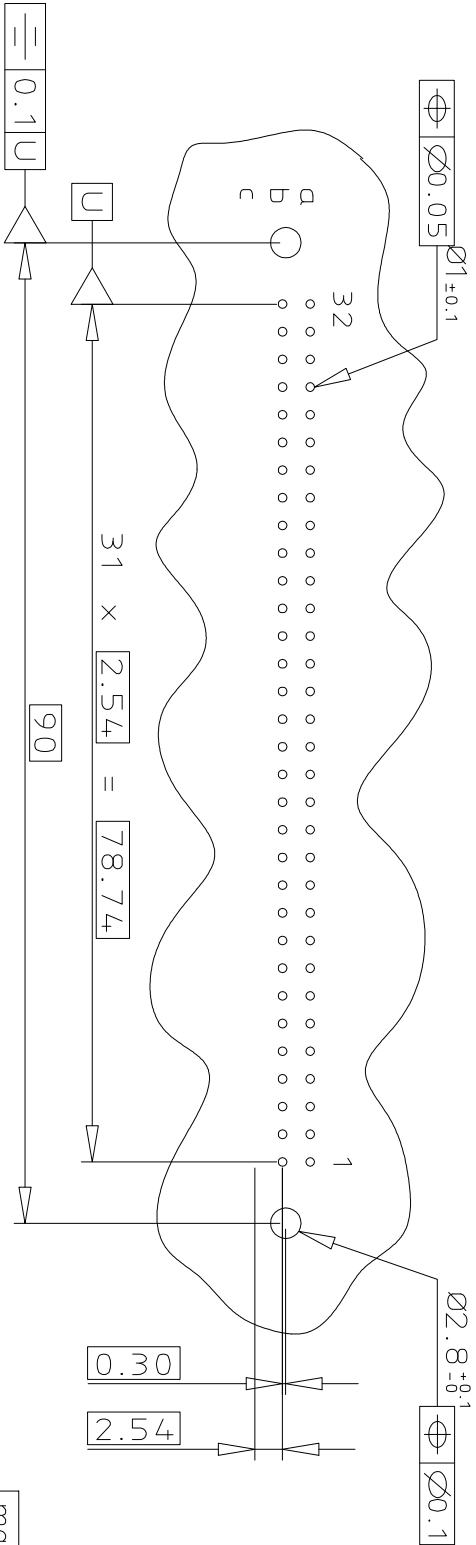

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family 8609				
ltr	ecn no	dr	date	tolerances unless otherwise specified		angles		mm 		title DIN REVERSE HEADER STRAIGHT SPILL DIN 41612 STYLE a				
A	105-0107	MINI	2005-05-19			linear		0.X ±0.1						
B	105-0064	MINI	2006-06-01					0.XX ±0.1						
C	108-0146	KR	2008-10-21	0°±2°				0.XXX ±0.1		scale 3:2				
				dr		MINI K V		2005-05-19						
				engr		RAKHEE G		2005-05-19						
				chr		KESAVAN R		2008-10-21						
				appd		KESAVAN R		2008-10-21						
sheet index	revision sheet		C	1										
type Product Customer Drawing														