



DIMENSIONS

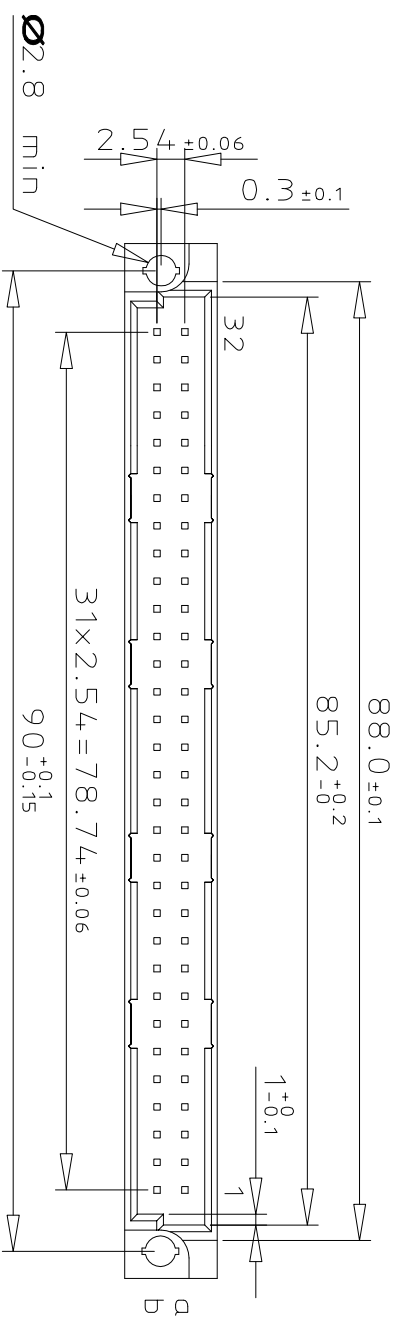


TERMINATION

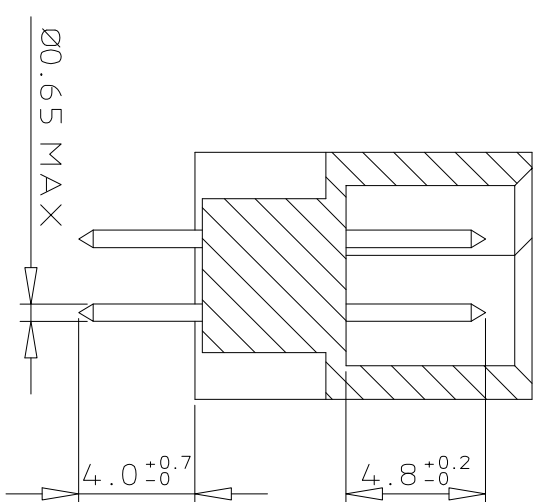

ORDERING INFORMATION

SERIES	8609	2	64	5	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	b	-	-	-	-	-	-	-	-	64
ROW a	-	-	-	-	-	-	-	-	-	32
NO. OF CONTACTS										
TYPE OF INSULATOR										
2 ROW MALE INSULATOR5										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE a8										
TERMINATION										
STRAIGHT SPIL14										
OPTIONS										
NO. OPTION7										
PERFORMANCE CLASS										
DIN 41612 CLASS 34										
DIN 41612 CLASS 25										
DIN 41612 CLASS 16										
AS PER MIL C 55302 / JSS 508088										
PITCH PER ROW										
2.54 mm5										
LEAD FREE VERSIONELF										

PCB LAYOUT

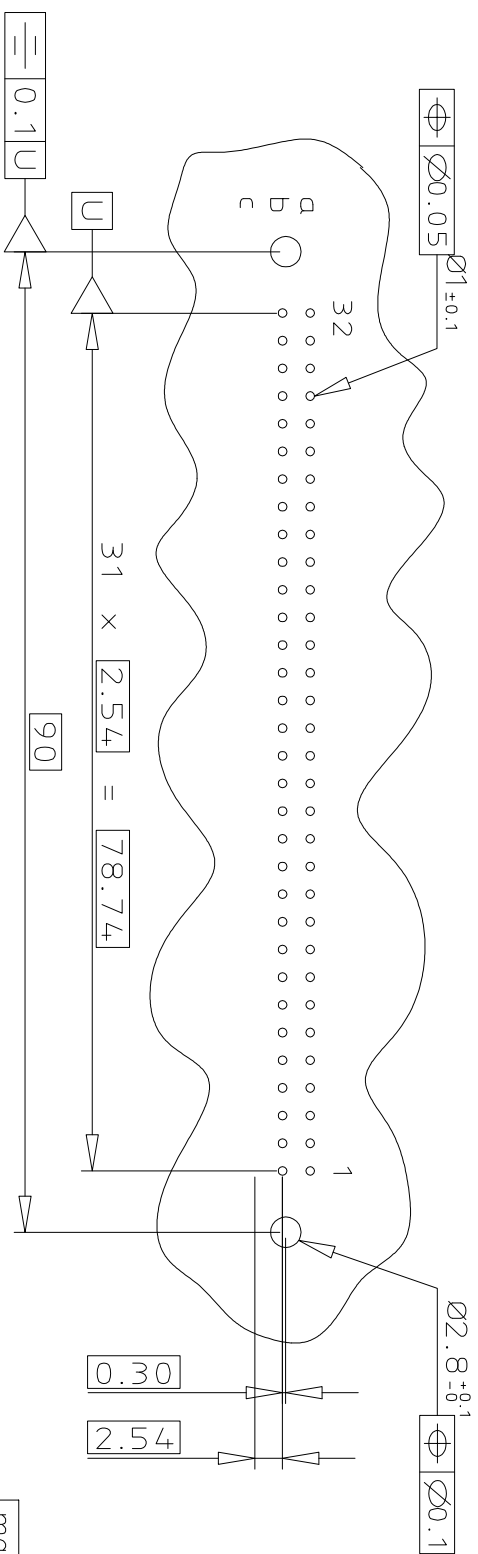

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code				surface				tolerance				projection				product family			
SFE DWG C-8609-0000A				ISO 1302 ✓				ISO 406 ISO 1101								8609			
ltr	ecn	no	dr	date		tolerances unless otherwise specified								title					
A	105-0107	MINI	2005-05-19	angles		linear		0.X										±0.1	
B	105-0064	MINI	2006-06-01	0°±2°		0.XXX		±0.1		scale 3:2				dwg no					
C	108-0146	KR	2008-10-21	dr		MINI K V		2005-05-19											
				engr		RAKHEE G		2005-05-19						sheet 1 of 1 size					
				chr		KESAVAN R		2008-10-21											
				oppd		KESAVAN R		2008-10-21		type Product Customer Drawing				A3					
sheet index	revision		C																
	sheet	1																	