

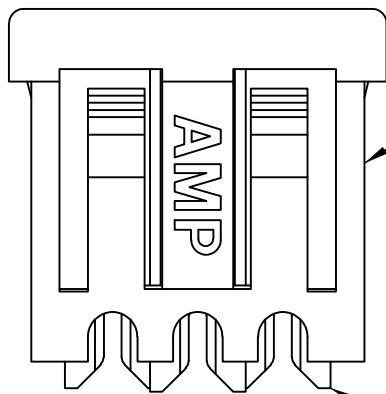


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
BD	39		Y1	REVISED PER ECO-11-004587	11MAR11	RK	HMR


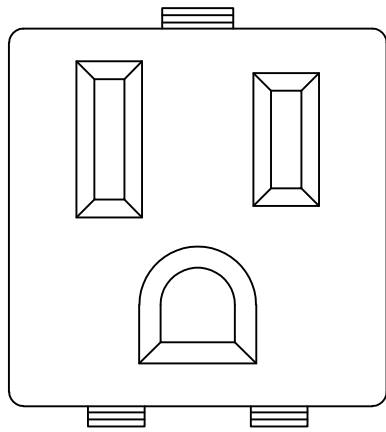


HOUSING

CONTACT
3 PLC

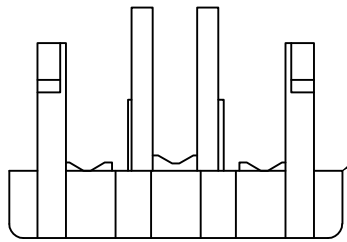


COVER




24.59±0.25
[.968±.010]

RECOMMENDED PANEL CUTOUT

- CONTACTS TO ACCEPT 14 AWG AND 12 AWG SOLID COPPER WIRE OR 14 AWG STRANDED WIRE WHEN USED WITH AMP 205 SERIES FASTON™ TAB.
- COVER PACKAGED UNASSEMBLED.
- SNAP IN FEATURE ACCOMODATES 0.76-1.78 [.030-.070] PANEL THICKNESS ONLY.
- ALL HOUSINGS AND COVERS ARE UL 94V-2 RATED UNLESS OTHERWISE SPECIFIED.
- UL 94V-0 RATED HOUSING AND COVER.

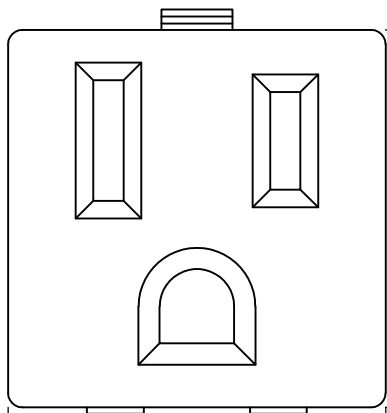


26.92±0.38
[1.060±.015]

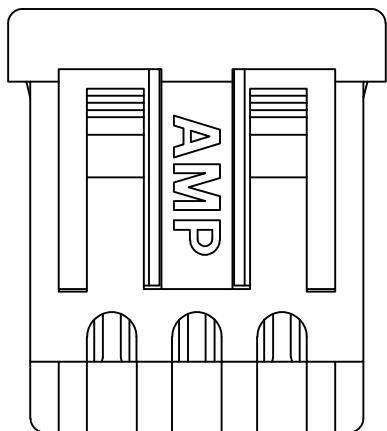

24.26 MAX
[.955]

3


CHARACTERS 402400022
MOLDED THIS SIDE
208979-1 ONLY

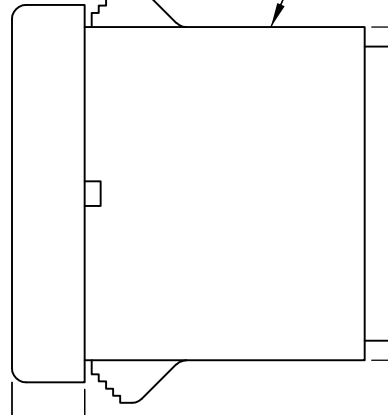

24.33 MAX
[.958]

25.15 MAX
[.990]

30.35 REF
[1.195]

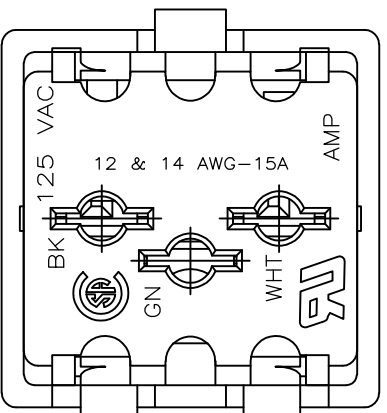

ASSEMBLED VIEW

OBSOLETE	—	1-208979-5
	PUTTY WHITE	1-208979-4
OBSOLETE	BLACK	5 1-208979-3
	ORANGE	1-208979-2
	GRAY	1-208979-1
	GRAY	1-208979-0
OBSOLETE	CREAM	208979-9
OBSOLETE	WHITE	208979-7
	ALMOND	208979-4
	BLACK	208979-2
OBSOLETE	BLACK	208979-1
	HOUSING COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	B.MOYER		5-1-91		 TE Connectivity								
		CHK	R. STONE		5-7-91										
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D. L. ROCKER		5-7-91		NAME						
		0 PLC ± -		PRODUCT SPEC		RECEPTACLE KIT, UNASSEMBLED, WITH COVER, CONVENIENCE OUTLET									
		1 PLC ± -		—											
		2 PLC ± -		APPLICATION SPEC		SIZE				CAGE CODE		DRAWING NO		RESTRICTED TO	
		3 PLC ± -		—											
		4 PLC ± -													
MATERIAL		FINISH		WEIGHT		—		A2		00779		C-208979		—	
HOUSING: NYLON, SEE TABLE COVER: NYLON BLACK CONTACTS: BRASS		—		CUSTOMER DRAWING				SCALE		2:1		SHEET		1 of 1	
														REV Y1	