

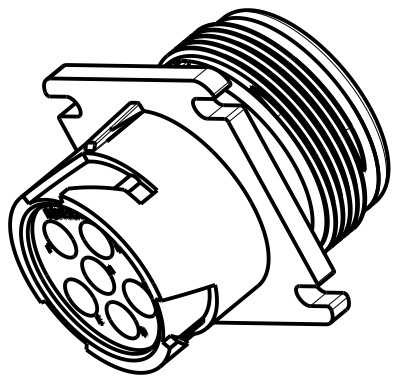
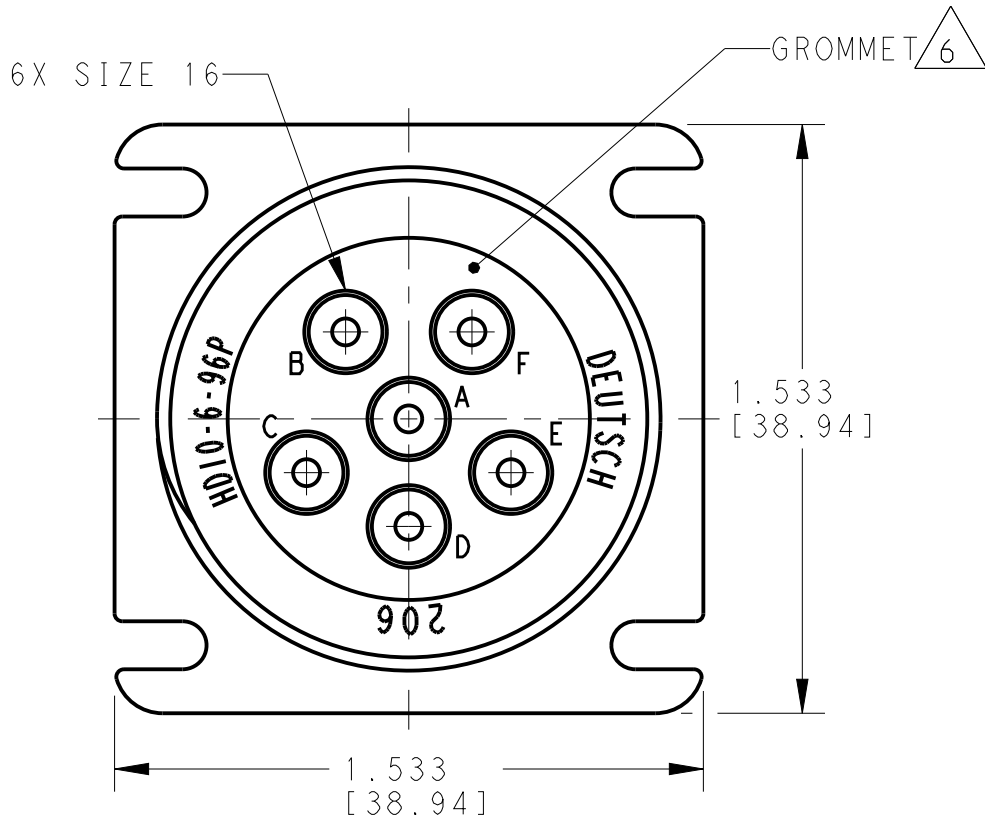


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
-	-		H	REVISED PER E.O. P17744	11DEC2002	- RDR
			J	REVISED PER E.O. P19419	11DEC2006	- RDR
			K	REVISED PER E.O. P21366	4JUN2012	- RDR
			K1	REVISED PER ECO-14-002953	29JAN2014	PV DM

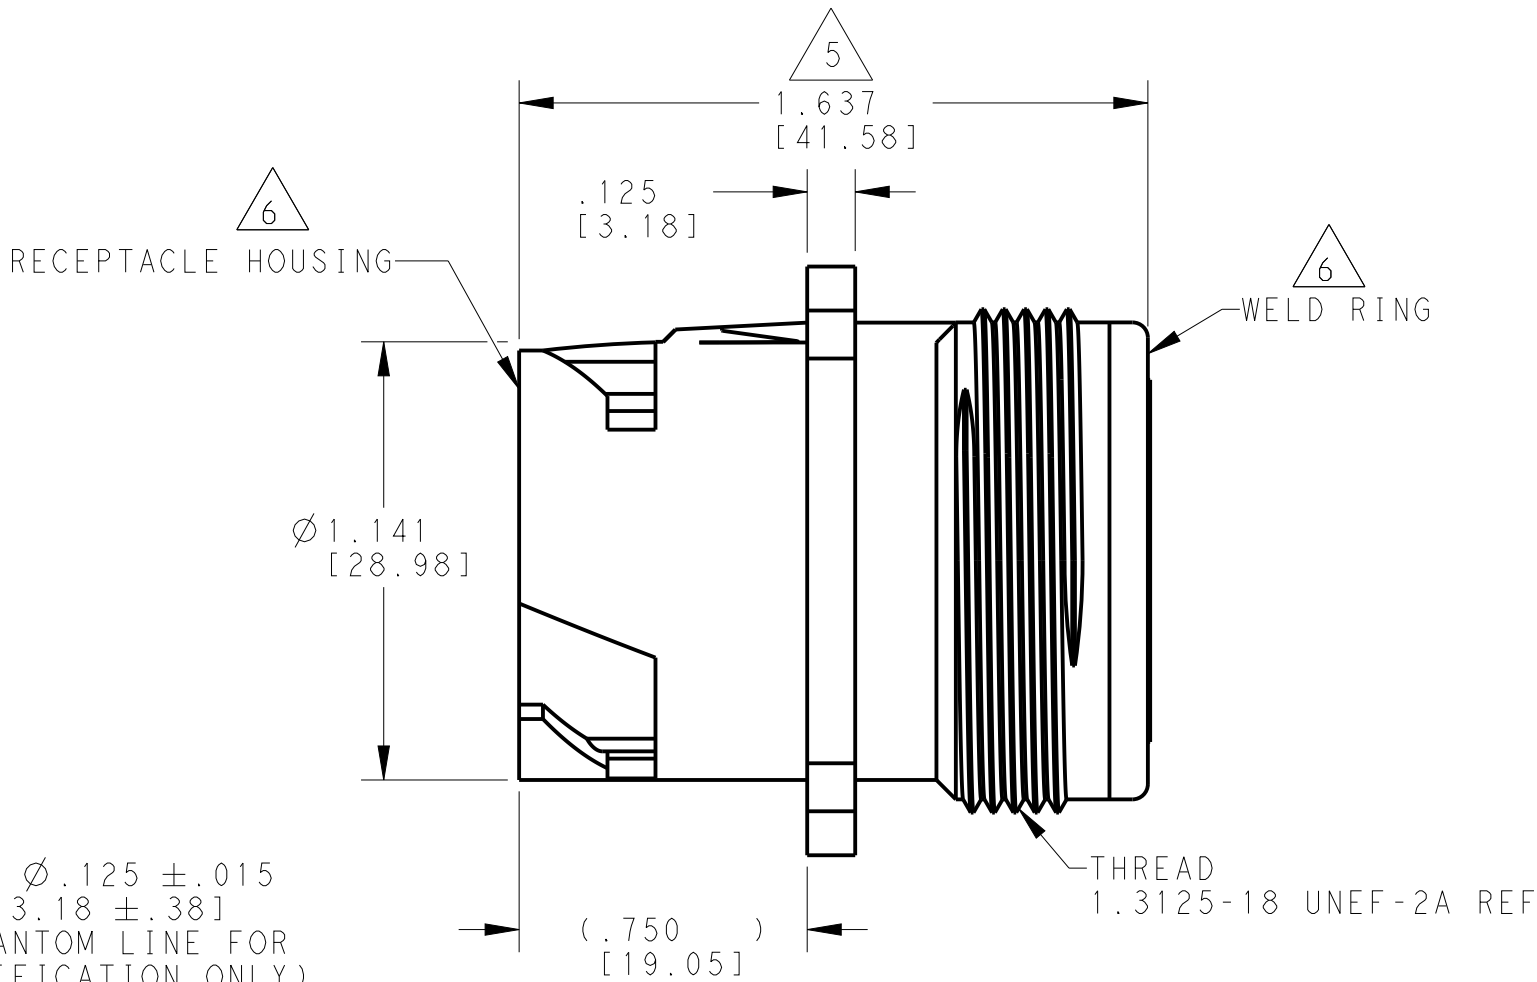

3-D VIEW

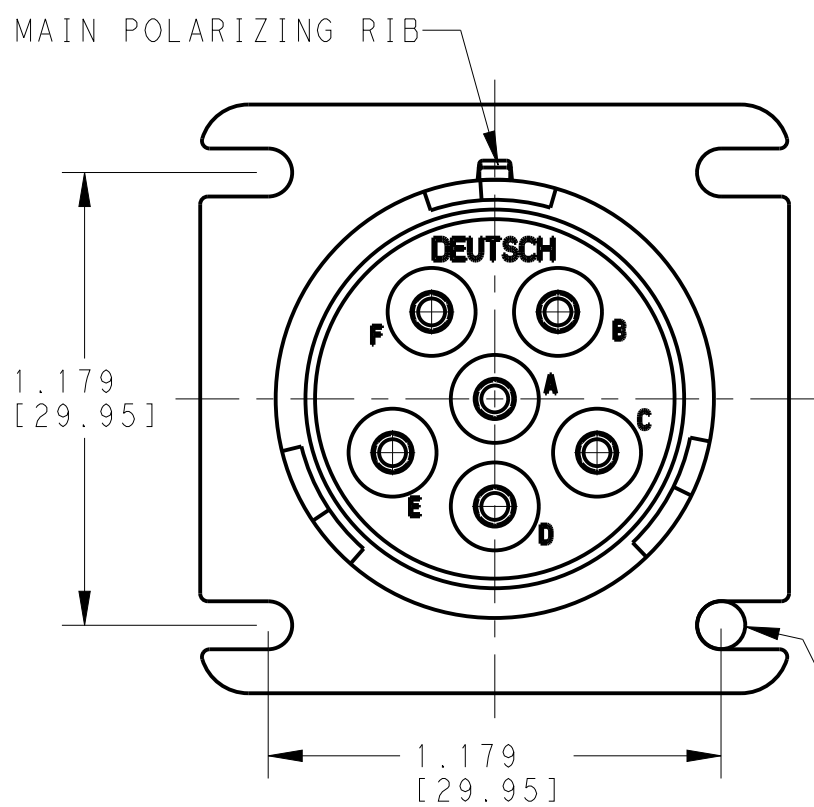


6. MATERIAL:
RECEPTACLE HOUSING AND WELD RING: PA 15%GF (GREY)
GROMMET: SILICONE (RED)
5. OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.
4. THIS RECEPTACLE MATES WITH FOLLOWING PLUG (X= SEAL TYPE, XXXX= ALL MODIFICATIONS).
HD16-6-96SX-XXXX
3. SEE DRAWING 0425-015-0000 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS.
2. MAXIMUM PANEL THICKNESS IS .250 [6.35].

1. SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGE.

CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.	WIRE RANGE [mm ²]
16	.100 [2.54]	.150 [3.81]	14-20 AWG [2.0-.50]

NOTES:

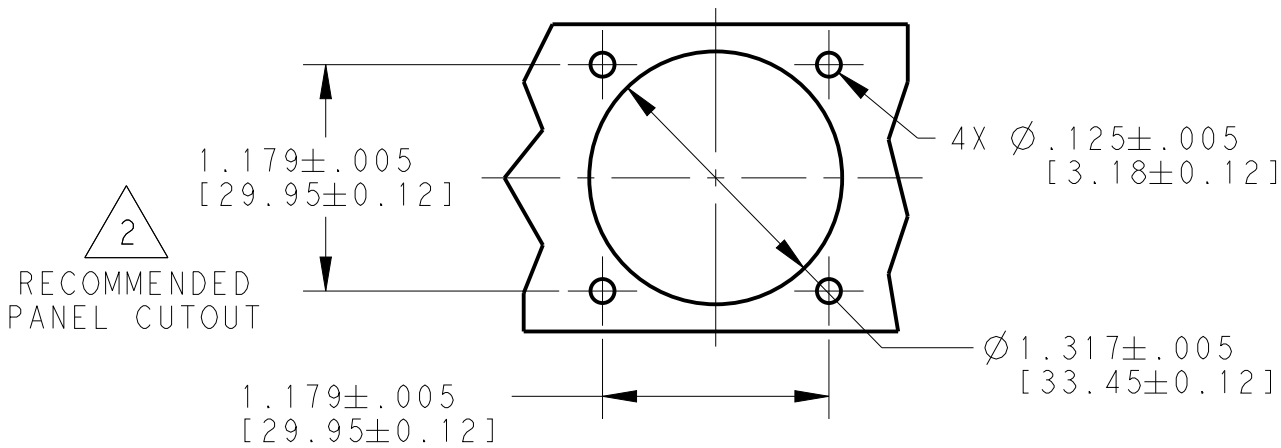

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. OCHOA 18SEP1998		
DIMENSIONS: INCHES [mm]		CHK I. GRANTCHAROVA 16SEP2013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MEYER 18SEP2013	NAME RECEPTACLE CONNECTOR SQUARE FLANGE HD10 SERIES ARR. 6-96 COLOUR: GREY	
0 PLC ±-		PRODUCT SPEC -		
1 PLC ±		APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO	
2 PLC ±		WEIGHT 34.55 (g)	A200779	
3 PLC ±.025		Customer Drawing		RESTRICTED TO -
4 PLC ±		SCALE 2:1		SHEET 1 OF 1
ANGLES ±0° 30' 0"		REV K1		
FINISH				