

SIGN	DATE	DESCRIPTION	APPROVER
△	01/24/07	The Soldering temperature from 245° to 250°	Aaron
△	01/24/07	Add "VDE" stipulation	Aaron
△	05/19/09	wire strip length changed from 6-7mm to 9-10mm	Eris
△	05/19/09	Temperature changed from -30°C-105°C to -40°C-115°C	Eris
△	05/19/09	The tolerance of dimension is changed	Eris
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

● Item 1	Insulating body	Thermoplastic (UL94V-0)
● Item 2	Insulating cover	Thermoplastic (UL94V-0)
● Item 3	Insulating lever	Thermoplastic (UL94V-0)
● Item 4	Contact pin	Brass, Tin plated
● Item 5	Spring clamp	Stainless steel

△ Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/9A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Pull force:
- Screw:
- △ ● Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV/2KV
- △ ● Operating temperature: -40°C to +115°C
- △ ● Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:  

PART NO.

HBxx31x0xxxxG

Poles

02 2Contacts
03 3Contacts
24 24Contacts

Color

0 Black
2 Red
5 Green(RAL6018/T)
8 Grey(RAL7004/P)

0000 Standard @ Logo
000A Standard ANY Logo

Any special item by customer request, please contact sales department.


G: Pb<40,000ppm

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD


TITLE		HB-3.81mm series				DWG NO.		8HB0301	
PART NO.		HBxx31x0xxxxG			DWG NO.		8HB0301		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Eris 2009.05.19	Eris 2009.05.19			UNIT: mm		X.	±0.50
						SCALE: NONE		X.X	±0.30
				SHEET: 01/01		REV.: F		X.XX	±0.10
								X°	±1°

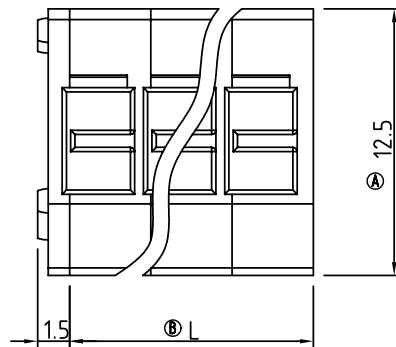


N = Number of poles

DimL=N×3.81
DimB=(N-1)×3.81

POLES	L	B
2p-6p	±0.2	±0.15
7p-12p	±0.3	±0.25
13p-18p	±0.4	±0.35
19p-24p	±0.45	±0.4

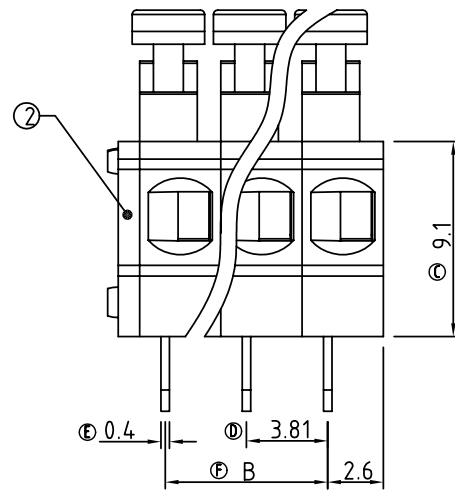

N=Number of contacts

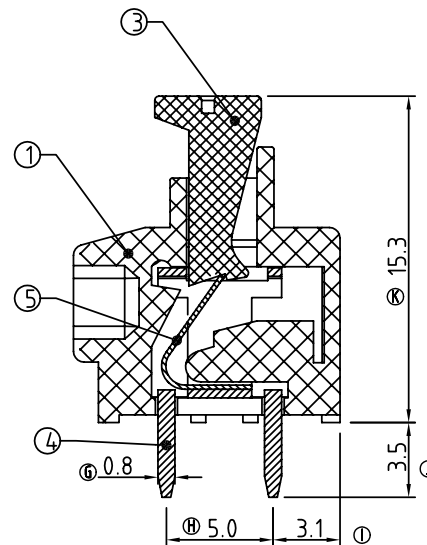

P.C.B LAYOUT

