

24V DRIVEN RECEIPT, TICKET PRINTER 2" KIOSK PRINTER UNIT

FTP-629USL010/011

OVERVIEW

The FTP-629USL Series is 24V driven receipt printer unit with cutter for 2 inch wide paper. The unit has our high-speed FTP-629MCL mechanism, cutter and control board, with an integrated paper feed and built-in paper guide section.

The receipt printer unit is most suitable for applications such as POS, ATM, and receipt and ticket issuing printers for various other equipment.

FEATURES

- · Medium duty unit (mounting is easy)
- High speed printer (200mm / sec.)
- · Auto cutter included
- · Paper near end-detection function
- Up to 3.25 inch paper diameter
- · Low power consumption
- · Printer double tilt function
- · Prints 2-D barcodes



DESIGNATION

Item		Part Number
Printer module interface	USB (Ver. 1.1)	FTP-629USL010*
	Serial (RS-232C)	FTP-629USL011*
Cables	USB Interface	FTP-629Y301
	Serial Interface	FTP-629Y302
	Power for logic, head, motor	FTP-629Y601

^{*:} Interface board is FTP-629DSL100 series

1

■ SPECIFICATIONS

I	tem	Specifications	
Part number		FTP-629USL010/011	
Printing method		Thermal-sensitive line dot method	
Dot structure		432 dots/line	
Dot pitch (Horizonta	al)	0.125 mm (8 dots/mm)—Dot density	
Dot pitch (Vertical)		0.125 mm (8 dots/mm)—Line feed pitch	
Effective printing ar	ea	54 mm	
Paper width		58 ⁻¹ mm	
Paper thickness		60 to 150 μm	
Paper print length		50 to 250mm	
Cutting type		Full or partial	
Number of columns	;	36 columns/line (12×24 dot font)	
Maximum printing s	peed	1600 dotlines/s (200 mm/s)	
Page mode	Low speed mode	40mm/sec	
	Middle speed mode	80mm/sec.	
	High speed mode	125 mm/sec.	
	Ultra high speed mode	200 mm/sec.	
Character types	1	Alphanumeric KANA: 159 International characters: 195 JIS KANJI (FTP-622DSL107, DSL112): approximately 6800	
Character composition, dimensions (H×W), Number of characters		24 × 12 dots, (3.0 × 1.5 mm), 48 columns 24 × 24 dots, (3.0 × 3.0 mm), 24 columns 16 × 8 dots, (2.0 × 1.0 mm), 72 columns 16 × 16 dots, (2.0 × 2.0 mm), 36 columns	
Interface		Serial RS232C, USB	
Power supply	For head	24VDC ± 5%, Voltage Current: average (): Peak TBA (2.04) A (at 200 mm/s printing speed, 12.5% printing ratio) TBA (1.03) A (at 80 mm/s printing speed, 12.5% printing ratio) TBA (0.51) A (at 40 mm/s printing speed, 12.5% printing ratio)	
-	For print motor	24VDC ± 5%, 1.0 A maximum	
	For conveyance motor	24VDC ± 5%, 1.0 A maximum	
	For cutter	24VDC ± 5%, 1.2 A maximum	
	For logic	5VDC ± 5%, 0.2 A maximum	
Dimensions		119.5(W) × 170.5(D) × 104(H) mm	
Weight (mechanism, cutter, board, frame)		Approximately 1.1 kg	

(Continued)

	Item	Specifica	itions		
Expected life	Mechanism	Pulse durability: 100 million pulse/dot (using Fujitsu's standard driving method) Wear resistance: 100 km (at 12.5% printing ratio)			
	Cutter	500,000 cuts			
	Operating temperature	0°C to +50°C			
Environmental conditions	Operating humidity	20 to 85% RH (no condensation)			
	Storage temperature	–20°C to +65°C (excluding paper)			
	Storage humidity	5 to 95% RH (no condensation)			
	Head temperature	By thermistor (applied energy control, abnormal temperature detection)			
Detection	Paper out/Mark detect	By photointerrupter			
	Platen open	By microswitch			
	Near end paper	By mechanical switch			
Recommended thermal sensitive paper		For front insertion use (80 mm width) Recommended papers · Oji Paper · NIPPON Paper · MITSUBISHI Paper Mills	: FTP-030P0701/P0102 : PD150R,PD160R-N,PD170R : TF50KS-E,TF60KS-E, TF50KS-E4 : P220VBB-1,AFP-233		
Paper diameter	Standard	83mm			
	Extended (attachment)	120mm			

^{*1: 24}VDC, minimum head resistance.

■ FUNCTIONS


	Item		Item
1.	Test print function	9.	Internal RAM abnormality detection
2.	Paper feed	10.	Cutter abnormality detection
3.	Paper out detection	11.	Mark detection
4.	Paper near end detection	12.	MCU operation abnormality detection
5.	Platen open detection	13.	Motor power saving
6.	Thermal head temperature abnormality detection	14.	Power supply disconnection protection
7.	Motor temperature detection	15.	Motor protection
8.	Voltage abnormality detection	16.	Thermal head protection

■ INTERFACE, COMMAND, OPTIONS

Please refer to the FTP-629DSL100 series. Interface command options, please see FTP-609 datasheet.

■ DIMENSIONS

Integrated unit

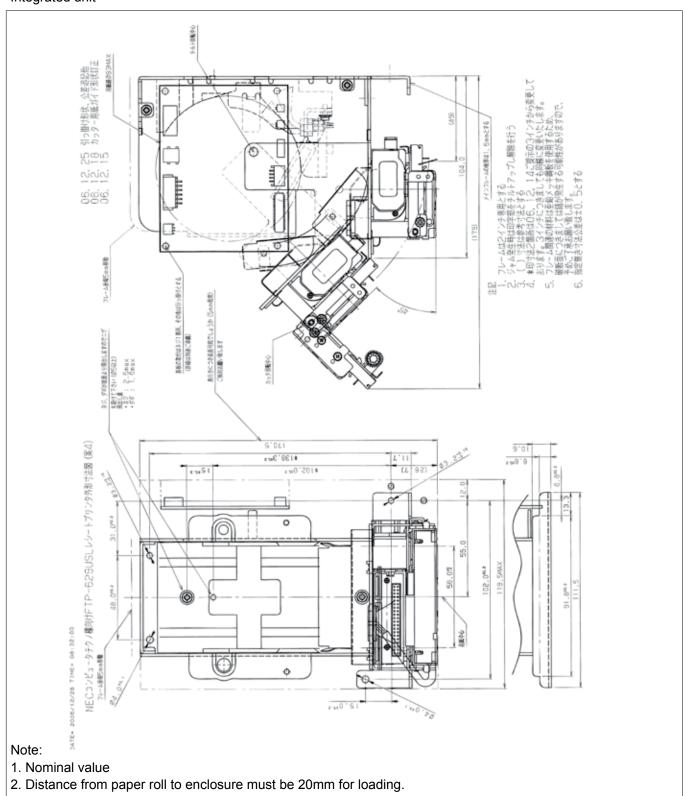

3. Basic reference line.

FTP-629USL010/011

■ COMMANDS

Command	Contents
НТ	Moves print position to the next tab.
LF	Line feed.
FF	Feeds forms (new page).
ESC FF	Data printing in page printing mode.
ESC EM+n	Setting the amount of the feeding at automatic paper feed.
ECS RS	Sets reverse printing.
ESC US	Resets reverse printing.
ESC SP+n	Character spacing setting.
ESC!+n	Sets print mode.
ESC \$+n1+n2	Absolute position spacing.
ESC % + n	External registration character specification/cancellation.
ESC & +y+c1+c2+x+d1to dn	External registration character definition.
ESC *+m+n1+n2+d1+dN	Sets bit image mode.
ESC_+n	Undeline setting.
ESC 2	Sets 1/6 inch line feed length.
ESC 3+n	Sets the line feed length.
ESC ? + n	External registration character deletion.
ESC @	Printer initialization.
ESC A+n	Sets the space between the line.
ESC C+n	Sets the page length by character line.
ESC D+d1+dN +NUL	Sets the tab position.
ESC E+n	Highlighted printing specification/cancellation.
ESC G+n	Double printing specification/cancellation.
ESC J+n	Feeds paper in forward direction and prints.
ESC K+n	Reverse paper feed.
ESC L+n	Page printing mode selection.
ESC Q+n+!+j	Frame overlay function.
ESC R+n	Selects international character.
ESC S+n	Line printing mode.
ESC T+n	Print direction setting (only page mode).
ESC V+n	Right Rotation 90° specification / cancellation.

FTP-629USL010/011

Commands continued

Command	Contents
ESC W+X1+X2+1+Y2+dX1+dX2+dX1+dY2	Page printing mode printing area setting.
ESC X+m+n	Setting the turning time of the motor excitation.
ESC Y+01h+ESC+x+a+m+d~	Program download.
ESC Y+01h+ESC+x+a+m+d~	Printer test.
ESC\+n1+n2	Relative position setting.
ESC a+n	Positional alignment.
ESC c+1+n	Sets internal processing.
ESC c+4+n	Paper-out detector selection.
ESC c+5+n	Panel switch enable/disable setting.
ESC d+n	Printing and n-line feeding.
ESC e+n	Prints and reverse feeds n-lines.
ESC i	Full cut
ESC m	Partial cut
ECS s+n	Sets printing speed.
ECS t+n	Character code table selection.
ESC u+n	Status of peripherals.
ESC v	The status of the paper sensor is notified.
ESC {+n	Sets/resets upside down printing.
FS !+n	Kanji printing mode collective specification.
FS &	Kanji printing mode specification.
FS_+n	Kanji underline specification/cancellation.
FS *+ m+n1+n2+d1 to dn	High speed collective image printing specified.
FS .	Kanji printing mode cancellation.
FS 2+c1+c2+d1 to dn	External character definition.
FS 9+n	Sets the detection functions.
FS C+n	Kanji code system selection.
FS E+n	Correction of impressed energy.
FS S+n+n1+n2	Kanji spacing setting.
FS W+n	Kanji double height adn width printing specification/cancellation.
FS r+n* ¹	Parameter transmission.
GS!+n	Character size specification.

FTP-629USL010/011

Commands continued

Command	Contents	
GS \$ + n1 + n2	Vertical absolute position specification in page printing mode.	
GS & +m + x + y1 + y2 + d1 to dn	Registered bit image definition.	
GS' + m + n	Registered bit image printing.	
GS *+x+y+d1 to dx*y*8	Registered bit image definition.	
GS/ +m	Registered bit image printing.	
GS:	Macro definition start/end.	
GS <	Line feeds to the next mark.	
GS A+m+n	Sets the line feed length after mark detection.	
GS B+m	Angle setting of bar code.	
GS E+n	Sets print quality.	
GS H+n	HRI character printing position selection.	
GS I+n+m	Printer ID registration	
GS L+n1+n2	Left margin position setting.	
GS R+n	Printer ID demand.	
GS W + n1 + n2	Printing area width setting.	
GS\ +n1 + n2	Vertical relative position specification in page printing mode (vertical direction of characters).	
GS^+r+t+m	Mark detection execution.	
G a+n	Automatic notification setting status.	
GS e+n+m	Sets bar code width.	
GSf+n	HRI character font selection.	
GS h+n	Sets bar code height.	
y) GS k+m +d1to dk + NUL x) GS k+m+n+ d1 to dn	Bar code printing.	
GS k+m+k1+k2+k3+k4+{[p1][d(1,1)] ~ [d(1,i)} ~ {[pi][d(i,1)]~[d(i,j)} [00]16	Print of 2Dcode (QR).	
GS k+m+k1+k2+k3+k4+k5+d1~dn Print d	GS k+m+k1+k2+k3+k4+k5+d1~dn Print of 2 Dcode (maxi).	
GS k+m+k1+k2+k3+k4+k5+k6+d1~dn	Print of 2 Dcode (PDF417).	
GS v	Notification of firmware version.	
GS w+n	Sets bar code length.	

^{*1:} These commands are valid with FTP-629DSL100 series.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited Gotanda-Chuo Building

3-5, Higashigotanda 2-chome, Shinagawa-ku

Tokyo 141 8630, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626

Email: promothq@fcl.fujitsu.com Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970

Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components/ Europe

Fujitsu Components Europe B.V.

Diamantlaan 25 2132 WV Hoofddorp Netherlands

Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex

Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com

Web: http://www.fujitsu.com/sg/services/micro/components/

©2009 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Rev. April 15, 2009.