
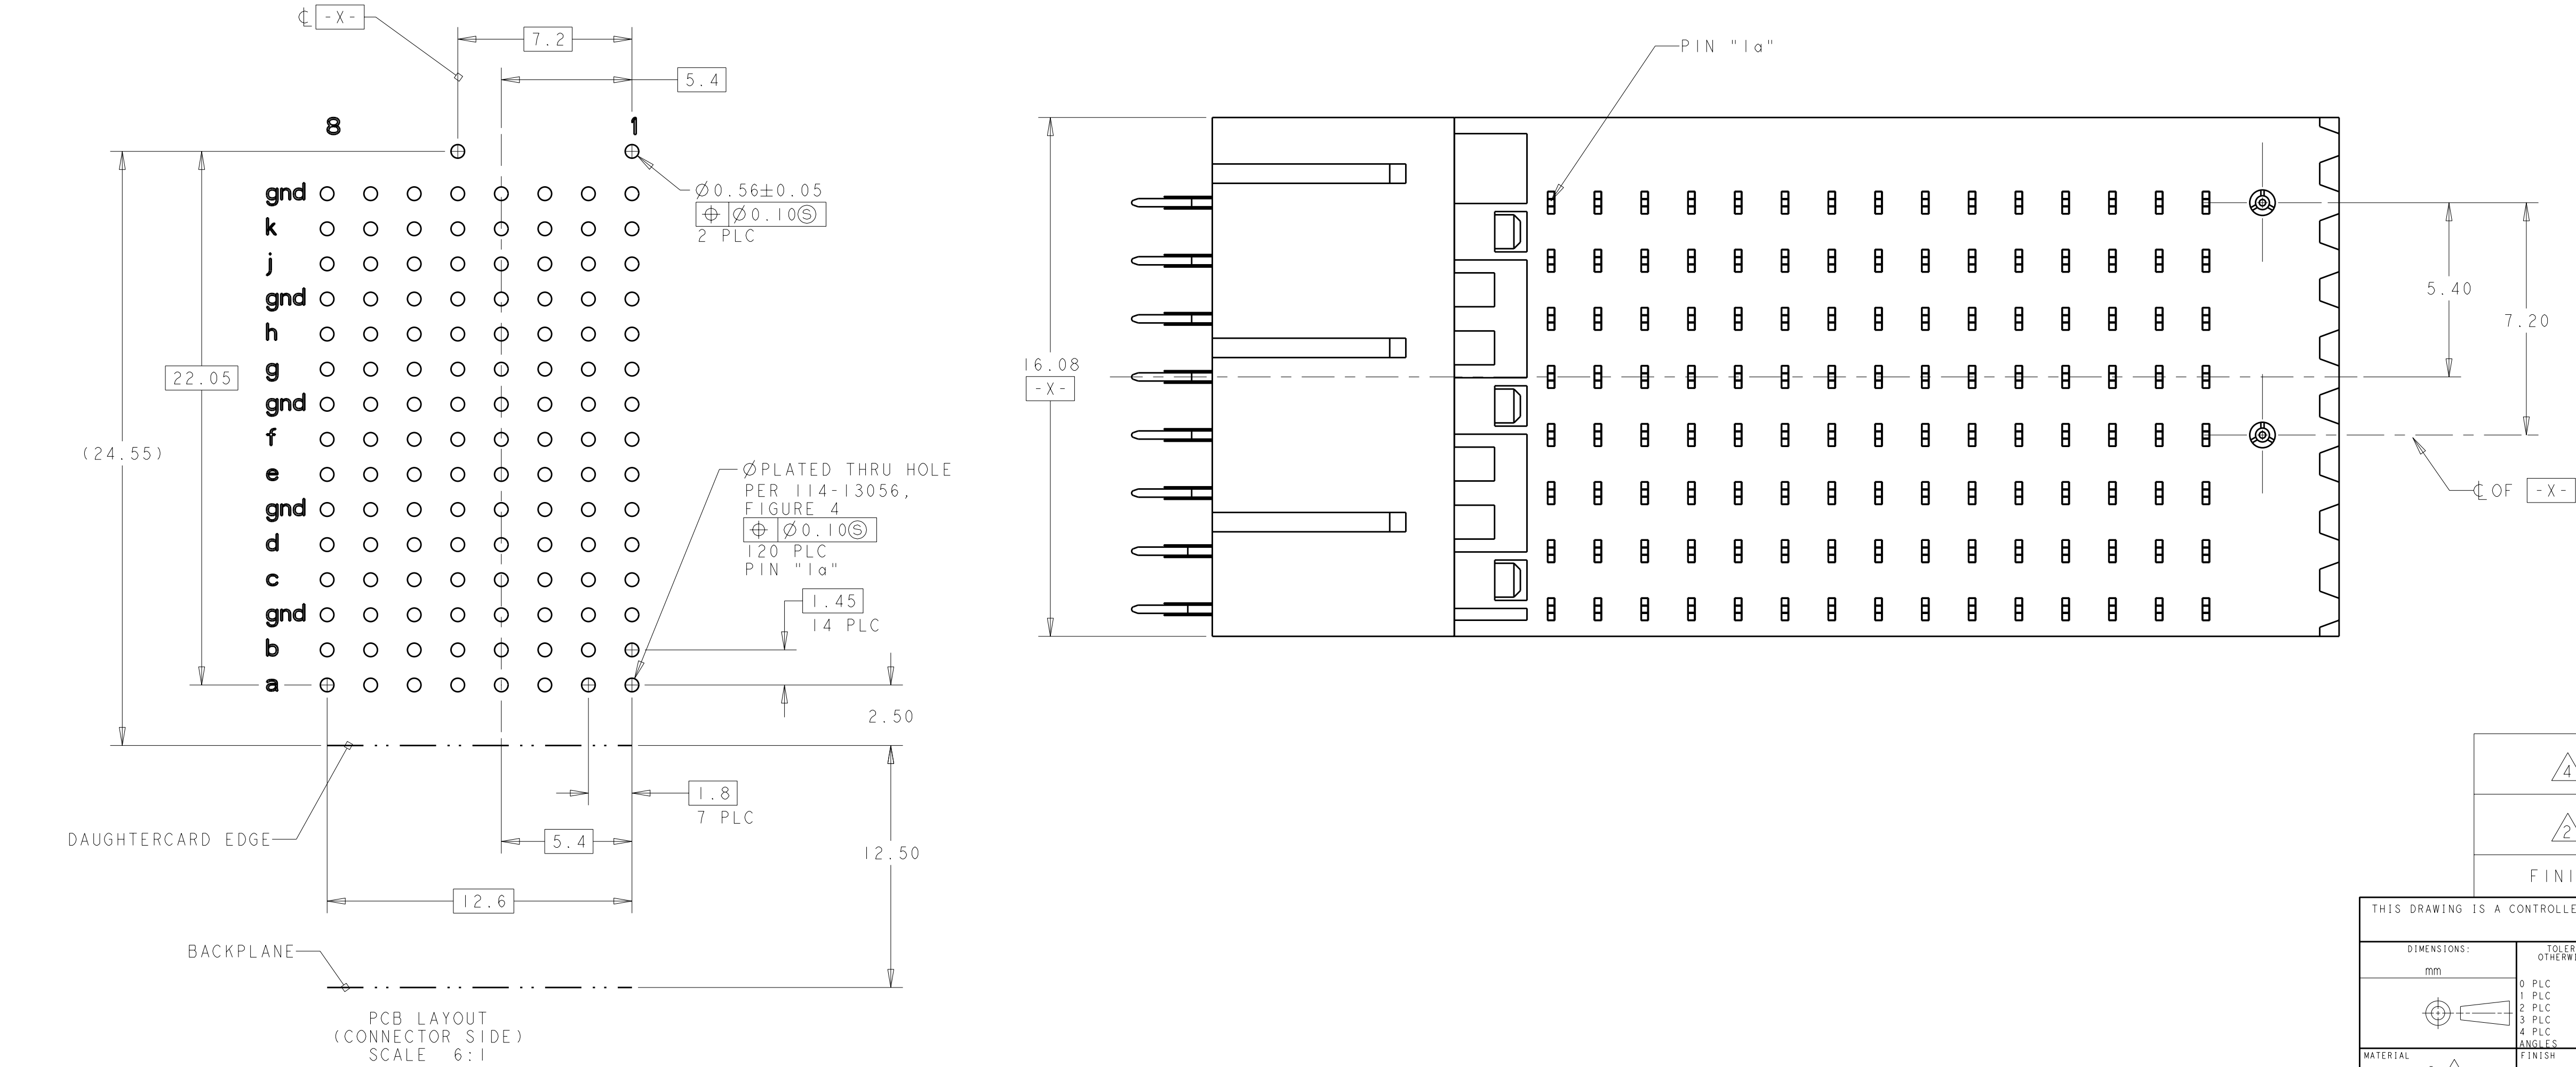


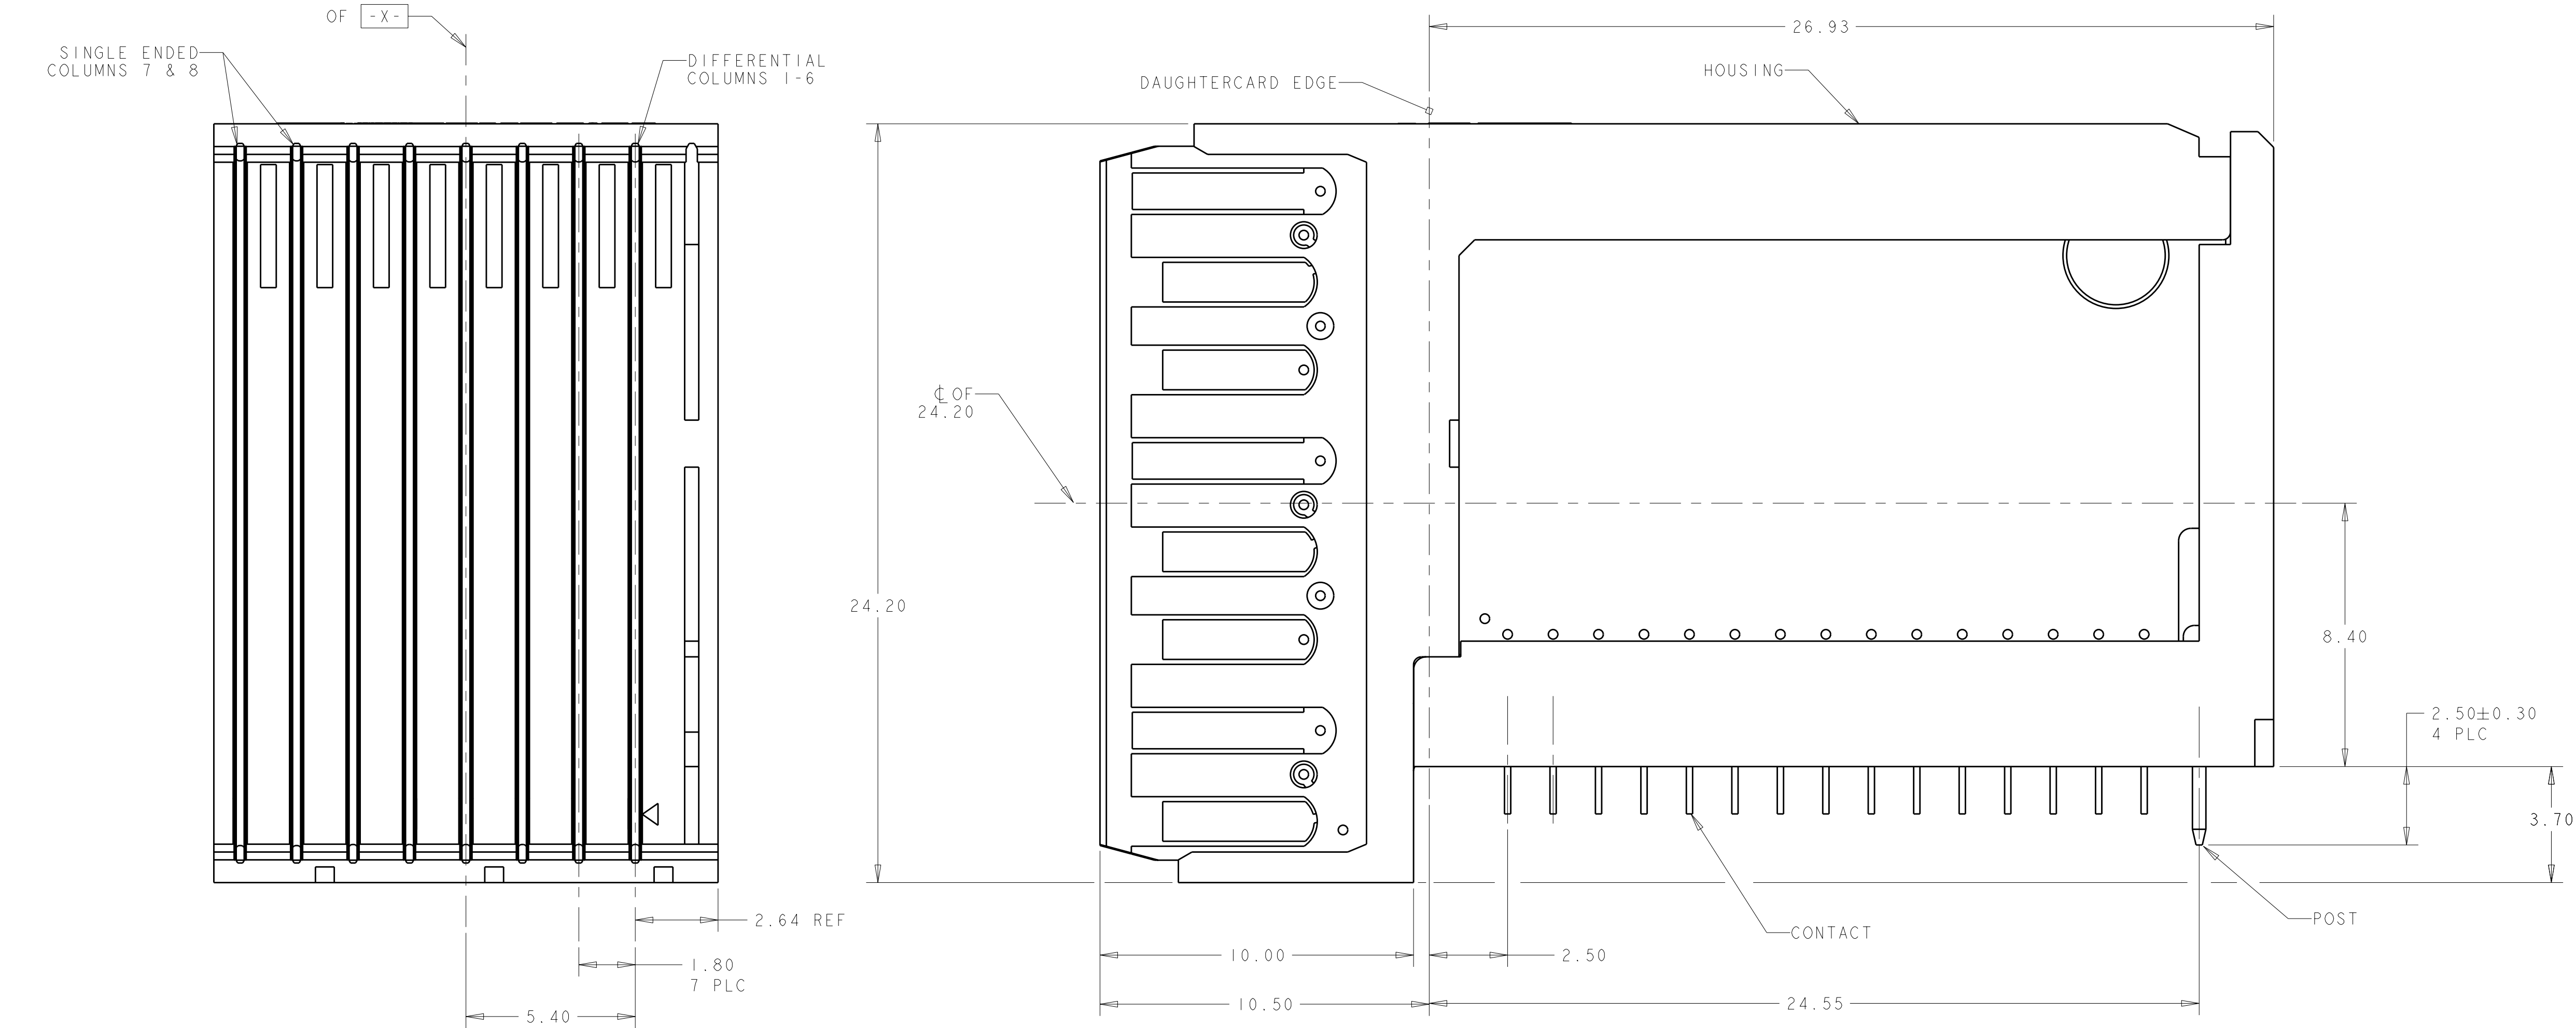

LOC	DIST	REV	LYR	DESCRIPTION	DATE	DWN	APVD
AD	00	A		RELEASED	02AUG2005	REH	GG
		A1		REV PER ECO-12-003895	14MAR2012	BC	AS

- 1 HOUSING: LCP, UL94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE.
- 2 CONTACT: 0.76µm GOLD PER ASTM B 488 IN
CONTACT AREA, 1.27µm MIN TIN-LEAD
ON COMPLIANT PORTION OF PCB TAIL,
BOTH OVER 1.27µm MIN NICKEL PER
SAE AMS-QQ-N-290 ALL OVER.
- POST: 1.27µm MIN NICKEL.
- 4 CONTACT: 0.76µm GOLD PER ASTM B 488 IN
CONTACT AREA, 0.508µm MIN MATTE
TIN PER ASTM B 545 ON COMPLIANT
PORTION OF PCB TAIL, BOTH OVER
1.27µm MIN NICKEL PER SAE
AMS-QQ-N-290 ALL OVER.
- POST: 1.27µm MIN NICKEL.

4	DIFFERENTIAL/SINGLE ENDED, NONSEQUENTIAL SIGNAL LEVEL 2, GROUND LEVEL 3	1410478-2
2	DIFFERENTIAL/SINGLE ENDED, NONSEQUENTIAL SIGNAL LEVEL 2, GROUND LEVEL 3	1410478-1
FINISH	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN HAMNER 02AUG2005	NAME RIGHT ANGLE, PLUG ASSEMBLY, LEFT END HALF, 25.4mm, MultiGig RT 1, DAUGHTERCARD CONNECTOR	
DIMENSIONS: mm		CHK G.GRIFFITH 02AUG2005	APVD G.GRIFFITH 02AUG2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-2072 APPLICATION SPEC 114-13056		
MATERIAL		WEIGHT -		
FINISH		CUSTOMER DRAWING		
SCALE 8:1		SHEET 1		OF 1
REV A1				