

# SERIES 28 HiPer-D Accessories



## Jackpost Kits

### 289-015 and 289-016


#### 289-015 JACKPOST KIT FOR HIPER-D CABLE CONNECTORS

Jackpost kits for panel mounting of HiPer-D cable connectors. 289-015 jackposts fit HiPer-D cable connectors 280-018P, 280-019S, 280-046P and 280-047S. For front-mounted and cable-mounted connectors, use 289-015-A. For rear panel mounted connectors, choose the correct jackpost based on panel thickness. #4-40 UNC 2B threads. One kit consists of (2) jackposts, (2) hex nuts and (2) split lockwashers. 300 series stainless steel, passivated.



Hiper-D Jackpost Kits for Cable Connectors				
Panel Thickness		Part Number	A	
In.	mm.		In.	mm.
(none)	(none)	<a href="#">289-015-A</a>	.250	6.35
.031	0.79	<a href="#">289-015-B</a>	.219	5.56
.047	1.19	<a href="#">289-015-C</a>	.203	5.16
.062	1.57	<a href="#">289-015-D</a>	.188	4.78
.093 <sup>(1)</sup>	2.36 <sup>(1)</sup>	<a href="#">289-015-D</a>	.188	4.78
.125 <sup>(1)</sup>	3.18 <sup>(1)</sup>	<a href="#">289-015-D</a>	.188	4.78

Note (1) Panels thicker than .062 (1.57) must be counterbored.

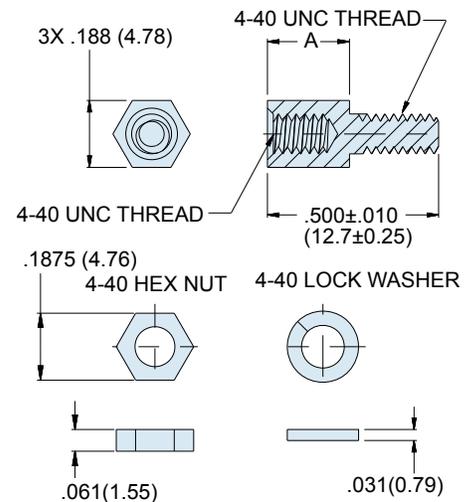

#### 289-016 JACKPOST KIT FOR LOW PROFILE PCB CONNECTORS

Stainless steel jackposts for panel mounting of low profile HiPer-D PCB connectors. For freestanding connectors, use 289-016-A. For rear panel mounted connectors, choose the correct jackpost based on panel thickness. #4-40 UNC 2B threads. 300 series stainless steel, passivated. One kit consists of (2) jackposts. Install into connector flange with threadlocking compound (not supplied).



Hiper-D Jackpost Kits for PCB Connectors				
Panel Thickness		Part Number	A	
In.	mm.		In.	mm.
(none)	(none)	<a href="#">289-016-A</a>	.250	6.35
.031	0.79	<a href="#">289-016-B</a>	.219	5.56
.047	1.19	<a href="#">289-016-C</a>	.203	5.16
.062	1.57	<a href="#">289-016-D</a>	.188	4.78
.093 <sup>(1)</sup>	2.36 <sup>(1)</sup>	<a href="#">289-016-D</a>	.188	4.78
.125 <sup>(1)</sup>	3.18 <sup>(1)</sup>	<a href="#">289-016-D</a>	.188	4.78

Note (1) Panels thicker than .062 (1.57) must be counterbored.

