



# Panasonic

ideas for life

New pin layout (LT type) added. Ultra high sensitivity realized at 50 mW nominal operating power

## TX-S RELAYS



Compliance with RoHS Directive

### FEATURES

#### 1. Nominal operating power:

##### High sensitivity of 50mW

By using the highly efficient polar magnetic circuit "seesaw balance mechanism", a nominal operating power of 50 mW (minimum operating power of 32 mW) has been achieved.

#### 2. Compact size

15.0(L) × 7.4(W) × 8.2(H) .591(L) × .291(W) × .323(H)

#### 3. High contact reliability

High contact reliability is achieved by the use of gold-clad twin crossbar contacts, low-gas formation materials, mold sealing the coil section, and by controlling organic gas in the coil.

**\*We also offer a range of products with AgPd contacts suitable for use in low level load analog circuits (Max. 10V DC 10 mA).**

#### 4. Outstanding surge resistance.

Surge breakdown voltage between open contacts:

1,500 V 10×160 μsec. (FCC part 68)

Surge breakdown voltage between contact and coil:

2,500 V 2×10 μsec. (Telcordia)

#### 5. Low thermal electromotive force (approx. 0.3 μV)

The structure of the mold-sealed body block of the coil section achieves nominal operating power of 50 mW and high sensitivity, along with low thermal electromotive force, reduced to approximately 0.3 μV.

#### 6. A range of surface-mount types is also available.

SA: Low-profile surface-mount terminal type

**⚠SL: High connection reliability surface-mount terminal type**

SS: Space saving surface-mount terminal type

#### 7. Sealed construction allows automatic washing.

### TYPICAL APPLICATIONS

1. Communications (XDSL, Transmission)

2. Measurement

3. Security

4. Home appliances, and audio/visual equipment

5. Automotive equipment

6. Medical equipment

### ORDERING INFORMATION



Contact arrangement  
2: 2 Form C

Surface-mount availability

Nil: Standard PC board terminal type or self-clinching terminal type ⚠

SA: SA type

**SL: SL type ⚠**

SS: SS type

Operating function

Nil: Single side stable

L: 1 coil latching

L2: 2 coil latching

LT: 2 coil latching

Terminal shape

Nil: Standard PC board terminal or surface-mount terminal

**H: Self-clinching terminal ⚠**

Nominal coil voltage (DC)

1.5, 3, 4.5, 6, 9, 12, 24V

Contact material

Nil: Standard contact (Ag+Au clad)

1: AgPd contact (low level load); AgPd+Au clad (stationary), AgPd (movable)

Packing style

Nil: Tube packing

X: Tape and reel (picked from 1/3/4/5-pin side)

Z: Tape and reel packing (picked from the 8/9/10/12-pin side)



## TYPES

## 1. Standard PC board terminal

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-----------------|----------------------|----------------------|
|                     |                      | Part No.           | Part No.        | Part No.             | Part No.             |
| 2 Form C            | 1.5V DC              | TXS2-1.5V          | TXS2-L-1.5V     | TXS2-L2-1.5V         | TXS2-LT-1.5V         |
|                     | 3V DC                | TXS2-3V            | TXS2-L-3V       | TXS2-L2-3V           | TXS2-LT-3V           |
|                     | 4.5V DC              | TXS2-4.5V          | TXS2-L-4.5V     | TXS2-L2-4.5V         | TXS2-LT-4.5V         |
|                     | 6V DC                | TXS2-6V            | TXS2-L-6V       | TXS2-L2-6V           | TXS2-LT-6V           |
|                     | 9V DC                | TXS2-9V            | TXS2-L-9V       | TXS2-L2-9V           | TXS2-LT-9V           |
|                     | 12V DC               | TXS2-12V           | TXS2-L-12V      | TXS2-L2-12V          | TXS2-LT-12V          |
|                     | 24V DC               | TXS2-24V           | TXS2-L-24V      | TXS2-L2-24V          | TXS2-LT-24V          |

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

Note: Please add "-1" to the end of the part number for AgPd contacts (low level load).

## 2. Self-clinching terminal

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-----------------|----------------------|----------------------|
|                     |                      | Part No.           | Part No.        | Part No.             | Part No.             |
| 2 Form C            | 1.5V DC              | TXS2-H-1.5V        | TXS2-L-H-1.5V   | TXS2-L2-H-1.5V       | TXS2-LT-H-1.5V       |
|                     | 3V DC                | TXS2-H-3V          | TXS2-L-H-3V     | TXS2-L2-H-3V         | TXS2-LT-H-3V         |
|                     | 4.5V DC              | TXS2-H-4.5V        | TXS2-L-H-4.5V   | TXS2-L2-H-4.5V       | TXS2-LT-H-4.5V       |
|                     | 6V DC                | TXS2-H-6V          | TXS2-L-H-6V     | TXS2-L2-H-6V         | TXS2-LT-H-6V         |
|                     | 9V DC                | TXS2-H-9V          | TXS2-L-H-9V     | TXS2-L2-H-9V         | TXS2-LT-H-9V         |
|                     | 12V DC               | TXS2-H-12V         | TXS2-L-H-12V    | TXS2-L2-H-12V        | TXS2-LT-H-12V        |
|                     | 24V DC               | TXS2-H-24V         | TXS2-L-H-24V    | TXS2-L2-H-24V        | TXS2-LT-H-24V        |

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

Note: Please add "-1" to the end of the part number for AgPd contacts (low level load).

## 3. Surface-mount terminal

## 1) Tube packing

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-----------------|----------------------|----------------------|
|                     |                      | Part No.           | Part No.        | Part No.             | Part No.             |
| 2 Form C            | 1.5V DC              | TXS2S□-1.5V        | TXS2S□-L-1.5V   | TXS2S□-L2-1.5V       | TXS2S□-LT-1.5V       |
|                     | 3V DC                | TXS2S□-3V          | TXS2S□-L-3V     | TXS2S□-L2-3V         | TXS2S□-LT-3V         |
|                     | 4.5V DC              | TXS2S□-4.5V        | TXS2S□-L-4.5V   | TXS2S□-L2-4.5V       | TXS2S□-LT-4.5V       |
|                     | 6V DC                | TXS2S□-6V          | TXS2S□-L-6V     | TXS2S□-L2-6V         | TXS2S□-LT-6V         |
|                     | 9V DC                | TXS2S□-9V          | TXS2S□-L-9V     | TXS2S□-L2-9V         | TXS2S□-LT-9V         |
|                     | 12V DC               | TXS2S□-12V         | TXS2S□-L-12V    | TXS2S□-L2-12V        | TXS2S□-LT-12V        |
|                     | 24V DC               | TXS2S□-24V         | TXS2S□-L-24V    | TXS2S□-L2-24V        | TXS2S□-LT-24V        |

□: For each surface-mounted terminal identification, input the following letter. SA type: A, SL type: L, SS type: S

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

Note: Please add "-1" to the end of the part number for AgPd contacts (low level load).

## 2) Tape and reel packing

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-----------------|----------------------|----------------------|
|                     |                      | Part No.           | Part No.        | Part No.             | Part No.             |
| 2 Form C            | 1.5V DC              | TXS2S□-1.5V-Z      | TXS2S□-L-1.5V-Z | TXS2S□-L2-1.5V-Z     | TXS2S□-LT-1.5V-Z     |
|                     | 3V DC                | TXS2S□-3V-Z        | TXS2S□-L-3V-Z   | TXS2S□-L2-3V-Z       | TXS2S□-LT-3V-Z       |
|                     | 4.5V DC              | TXS2S□-4.5V-Z      | TXS2S□-L-4.5V-Z | TXS2S□-L2-4.5V-Z     | TXS2S□-LT-4.5V-Z     |
|                     | 6V DC                | TXS2S□-6V-Z        | TXS2S□-L-6V-Z   | TXS2S□-L2-6V-Z       | TXS2S□-LT-6V-Z       |
|                     | 9V DC                | TXS2S□-9V-Z        | TXS2S□-L-9V-Z   | TXS2S□-L2-9V-Z       | TXS2S□-LT-9V-Z       |
|                     | 12V DC               | TXS2S□-12V-Z       | TXS2S□-L-12V-Z  | TXS2S□-L2-12V-Z      | TXS2S□-LT-12V-Z      |
|                     | 24V DC               | TXS2S□-24V-Z       | TXS2S□-L-24V-Z  | TXS2S□-L2-24V-Z      | TXS2S□-LT-24V-Z      |

□: For each surface-mounted terminal identification, input the following letter. SA type: A, SL type: L, SS type: S

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs.

Notes: 1. Tape and reel packing symbol "-Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/2/3/4-pin side) is also available.

2. Please add "-1" to the end of the part number for AgPd contacts (low level load). (Ex. TXS2SA-1.5V-1-Z)

## RATING

## 1. Coil data

## 1) Single side stable

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F)             | Drop-out voltage (at 20°C 68°F)            | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|--|---|---------------------------------------|-------------------------|-------------------------------------|
| 1.5V DC              | 80%V or less of nominal voltage* (Initial) | 10%V or more of nominal voltage* (Initial) | 33.3mA  | 45Ω                                   | 50mW                    | 150%V of nominal voltage            |
| 3V DC                |  |  | 16.7mA  | 180Ω                                  |                         |                                     |
| 4.5V DC              |  |  | 11.1mA  | 405Ω                                  |                         |                                     |
| 6V DC                |  |  | 8.3mA   | 720Ω                                  |                         |                                     |
| 9V DC                |  |  | 5.6mA   | 1,620Ω                                |                         |                                     |
| 12V DC               |  |  | 4.2mA   | 2,880Ω                                |                         |                                     |
| 24V DC               |  |  | 2.9mA   | 8,229Ω                                | 70mW                    |                                     |



Partly Order Discontinued as of August 31, 2011

TX-S

2) 1 coil latching

| Nominal coil voltage | Set voltage (at 20°C 68°F)                 | Reset voltage (at 20°C 68°F)               | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|--|---|---------------------------------------|-------------------------|-------------------------------------|
| 1.5V DC              | 80%V or less of nominal voltage* (Initial) | 80%V or less of nominal voltage* (Initial) | 23.3mA  | 64.3Ω                                 | 35mW                    | 150%V of nominal voltage            |
| 3V DC                |  |  | 11.7mA  | 257Ω                                  |                         |                                     |
| 4.5V DC              |  |  | 7.8mA   | 579Ω                                  |                         |                                     |
| 6V DC                |  |  | 5.8mA   | 1,029Ω                                |                         |                                     |
| 9V DC                |  |  | 3.9mA   | 2,314Ω                                |                         |                                     |
| 12V DC               |  |  | 2.9mA   | 4,114Ω                                |                         |                                     |
| 24V DC               |  |  | 2.1mA   | 11,520Ω                               | 50mW                    |                                     |

3) 2 coil latching (L2, LT)

| Nominal coil voltage | Set voltage (at 20°C 68°F)                 | Reset voltage (at 20°C 68°F)               | Nominal operating current [±10%] (at 20°C 68°F) |            | Coil resistance [±10%] (at 20°C 68°F) |            | Nominal operating power |            | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|--|---|------------|---------------------------------------|------------|-------------------------|------------|-------------------------------------|
|                      |  |  | Set coil  | Reset coil | Set coil                              | Reset coil | Set coil                | Reset coil |                                     |
| 1.5V DC              | 80%V or less of nominal voltage* (Initial) | 80%V or less of nominal voltage* (Initial) | 46.7mA  | 46.7mA     | 32.1Ω                                 | 32.1Ω      | 70mW                    | 70mW       | 150%V of nominal voltage            |
| 3V DC                |  |  | 23.3mA  | 23.3mA     | 129Ω                                  | 129Ω       |                         |            |                                     |
| 4.5V DC              |  |  | 15.6mA  | 15.6mA     | 289Ω                                  | 289Ω       |                         |            |                                     |
| 6V DC                |  |  | 11.7mA  | 11.7mA     | 514Ω                                  | 514Ω       |                         |            |                                     |
| 9V DC                |  |  | 7.8mA   | 7.8mA      | 1,157Ω                                | 1,157Ω     | 150mW                   | 150mW      |                                     |
| 12V DC               |  |  | 5.8mA   | 5.8mA      | 2,057Ω                                | 2,057Ω     |                         |            |                                     |
| 24V DC               |  |  | 6.3mA   | 6.3mA      | 3,840Ω                                | 3,840Ω     |                         |            |                                     |

\*Pulse drive (JIS C 5442-1986)

2. Specifications

| Characteristics                          | Item  | Specifications   |  |
|--|---|--|--|
| Contact                                  | Arrangement                                       | 2 Form C   |  |
|  | Initial contact resistance, max.                  | Max. 100 mΩ (By voltage drop 6 V DC 1A)  |  |
|  | Contact material                                  | Standard contact: Ag+Au clad, AgPd contact (low level load): AgPd+Au clad (stationary), AgPd (movable)                           |  |
| Rating                                   | Nominal switching capacity                        | 1 A 30 V DC (resistive load)   |  |
|  | Max. switching power                              | 30 W (DC) (resistive load)   |  |
|  | Max. switching voltage                            | 110V DC  |  |
|  | Max. switching current                            | 1 A  |  |
|  | Min. switching capacity (Reference value)*1       | 10μA 10mV DC   |  |
|  | Nominal operating power                           | Single side stable<br>1 coil latching<br>2 coil latching   | 50 mW (1.5 to 12 V DC), 70 mW (24 V DC)<br>35 mW (1.5 to 12 V DC), 50 mW (24 V DC)<br>70 mW (1.5 to 12 V DC), 150 mW (24 V DC) |
| Electrical characteristics               | Insulation resistance (Initial)                   | Min. 1,000MΩ (at 500V DC)<br>Measurement at same location as "Initial breakdown voltage" section.                                |  |
|  | Breakdown voltage (Initial)                       | Between open contacts  | 750 Vrms for 1min. (Detection current: 10mA)   |
|  |   | Between contact and coil   | 1,800 Vrms for 1min. (Detection current: 10mA)   |
|  |   | Between contact sets   | 1,000 Vrms for 1min. (Detection current: 10mA)   |
|  | Surge breakdown voltage (Initial)                 | Between open contacts  | 1,500 V (10×160μs) (FCC Part 68)   |
|  |   | Between contacts and coil  | 2,500 V (2×10μs) (Telcordia)   |
|  | Temperature rise (at 20°C 68°F)                   |  | Max. 50°C<br>(By resistive method, nominal coil voltage applied to the coil; contact carrying current: 1A.)                    |
| Operate time [Set time] (at 20°C 68°F)   |   | Max. 5 ms [Max. 5 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.)                                 |  |
| Release time [Reset time] (at 20°C 68°F) |   | Max. 5 ms [Max. 5 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode)                 |  |
| Mechanical characteristics               | Shock resistance                                  | Functional   | Min. 750 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms; detection time: 10μs.)  |
|  |   | Destructive  | Min. 1,000 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)  |
|  | Vibration resistance                              | Functional   | 10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.)  |
|  |   | Destructive  | 10 to 55 Hz at double amplitude of 5 mm  |
| Expected life                            | Mechanical  | Min. 5×10 <sup>7</sup> (at 180 cpm)  |  |
|  | Electrical  | Min. 2×10 <sup>5</sup> (1 A 30 V DC resistive) (at 20 cpm)   |  |
| Conditions                               | Conditions for operation, transport and storage*2 | Ambient temperature: -40°C to +70°C -40°F to +158°F;<br>Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) |  |
|  | Max. operating speed (at rated load)              | 20 cpm   |  |
| Unit weight                              |   | Approx. 2 g .071 oz  |  |

Notes: \*1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. (AgPd contact type is available for low level load switching [10V DC, 10mA max. level])

\*2 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT.



REFERENCE DATA

1. Maximum switching capacity




2. Life curve



3. Mechanical life

Tested sample: TXS2-4.5V, 10 pcs.  
Operating speed: 180 cpm

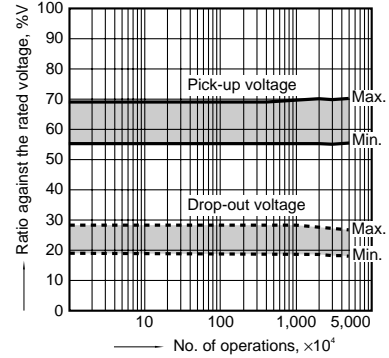

4. Electrical life (1 A 30 V DC resistive load)

Tested sample: TXS2-4.5V, 6 pcs.  
Operating speed: 20 cpm

Change of pick-up and drop-out voltage



Change of contact resistance



5-(1). Coil temperature rise

Tested sample: TXS2-4.5V, 6 pcs.

Point measured: Inside the coil

Ambient temperature: 25°C 77°F, 70°C 158°F



5-(2). Coil temperature rise

Tested sample: TXS2-24V, 6 pcs.

Point measured: Inside the coil

Ambient temperature: 25°C 77°F, 70°C 158°F



6-(1). Operate and release time (with diode)

Tested sample: TXS2-4.5V, 10 pcs.



6-(2). Operate and release time (without diode)

Tested sample: TXS2-4.5V, 10 pcs.



7. Ambient temperature characteristics

Tested sample: TXS2-4.5V, 5 pcs.



8-(1). High frequency characteristics (Isolation)

Tested sample: TXS2-4.5V, 2 pcs.



8-(2). High frequency characteristics (Insertion loss)

Tested sample: TXS2-4.5V, 2 pcs.





9-(1). Malfunctional shock (single side stable)  
Tested sample: TXS2-4.5V, 6 pcs.



9-(2). Malfunctional shock (latching)  
Tested sample: TXS2-L2-4.5V, 6 pcs.



10. Thermal electromotive force  
Tested sample: TXS2-4.5V, 6 pcs.



11-(1). Influence of adjacent mounting  
Tested sample: TXS2-4.5V, 6 pcs.



11-(2). Influence of adjacent mounting  
Tested sample: TXS2-4.5V, 6 pcs.



11-(3). Influence of adjacent mounting  
Tested sample: TXS2-4.5V, 6 pcs.



12. Pulse dialing test  
(35 mA 48V DC wire spring relay load)  
Tested sample: TXS2-4.5V, 6 pcs.



Change of pick-up and drop-out voltage



Change of contact resistance



Note: Data of surface-mount type are the same as those of PC board terminal type.



**DIMENSIONS** (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>

**1. Standard PC board terminal and Self clinching terminal**

**CAD Data**



| Type                           | External dimensions (General tolerance: $\pm 0.3 \pm 0.12$ ) |                               | PC board pattern (Bottom view) (Tolerance: $\pm 0.1 \pm 0.04$ ) |                               |
|--------------------------------|--|-------------------------------|---|-------------------------------|
|                                | Single side stable and 1 coil latching type                  | 2 coil latching type (L2, LT) | Single side stable and 1 coil latching type                     | 2 coil latching type (L2, LT) |
| Standard PC board terminal     |  |                               |   |                               |
| <b>Self clinching terminal</b> |  |                               |   |                               |

**Schematic (Bottom view)**

Single side stable

1 coil latching

2 coil latching (L2)

2 coil latching (LT)



(Deenergized condition)



(Reset condition)



(Reset condition)



(Reset condition)

**2. Surface-mount terminal**

**CAD Data**



| Type           | External dimensions (General tolerance: $\pm 0.3 \pm 0.12$ ) |                               | Suggested mounting pad (Top view) (Tolerance: $\pm 0.1 \pm 0.04$ ) |                               |
|----------------|--|-------------------------------|--|-------------------------------|
|                | Single side stable and 1 coil latching type                  | 2 coil latching type (L2, LT) | Single side stable and 1 coil latching type                        | 2 coil latching type (L2, LT) |
| SA type        |  |                               |  |                               |
| <b>SL type</b> |  |                               |  |                               |
| SS type        |  |                               |  |                               |



**Schematic (Top view)**

Single side stable

1 coil latching

2 coil latching (L2)

2 coil latching (LT)



(Deenergized condition)

(Reset condition)

(Reset condition)

(Reset condition)

**NOTES**

**1. Packing style**

1) The relay is packed in a tube with the relay orientation mark on the left side, as shown in the figure below.



2) Tape and reel packing (surface-mount terminal type)

(1) Tape dimensions

(i) SA type

mm inch



Please chuck the  portion. Avoid chucking the center of the relay. In addition, excessive chucking pressure to the pinpoint of the relay should be avoided.



(ii) SL type

mm inch



**For general cautions for use, please refer to the "Cautions for use of Signal Relays" or "General Application Guidelines".**

(iii) SS type

mm inch



(2) Dimensions of plastic reel

mm inch

