

Precision, Low Noise, Rail-to-Rail Output, CMOS Operational Amplifier

■ GENERAL DESCRIPTION

The NJU7076/NJU7077/NJU7078 is a high precision Rail-to-Rail output Single/Dual/Quad CMOS operational amplifier featuring a low noise of $10\text{nV}/\sqrt{\text{Hz}}$ typ., low input offset voltage of $150\mu\text{V}$ max., low temperature drift of $0.5\mu\text{V}/^{\circ}\text{C}$ typ. and low bias current of 1pA typ..

The output swing can reach 20 mV from the rails, while driving a $10\text{k}\Omega$ load (at 5V operation). The NJU7076/NJU7077/NJU7078 also has a high RF noise immunity which can reduce malfunctions caused by RF noises from mobile phones and others. The combination of these specifications makes the NJU7076/ NJU7077/NJU7078 well-suited for sensor applications such as a temperature sensor, weight sensor and others, high precision current sensing amplifiers and current voltage converters.


■ PACKAGE OUTLINE



NJU7076F
(SOT-23-5)



NJU7077R
(MSOP8(VSP8))



NJU7078V
(SSOP14)

■ FEATURES

- High Precision
- Low Offset Voltage

NJU7076/NJU7077	150 μV max.
NJU7078	200 μV max.
- Low Offset Voltage Drift

NJU7076/NJU7077	0.5 $\mu\text{V}/^{\circ}\text{C}$ typ.
NJU7078	10 $\text{nV}/\sqrt{\text{Hz}}$ typ.
- Low Noise
- Low Input Bias Current
- Rail-to-Rail Output

$R_L=10\text{k}\Omega$	0.02V to 4.98V typ. ($V^+=5\text{V}$)
$R_L=600\Omega$	0.08V to 4.92V typ. ($V^+=5\text{V}$)
- Ground sense
- RF Noise Immunity
- Operating Voltage


NJU7076	2.2V to 5.5V
NJU7077	
- Unity-Gain Stable
- Package

NJU7076	SOT-23-5
NJU7077	MSOP8(VSP8)*
NJU7078	*MEET JEDEC MO-187-DA SSOP14


■ APPLICATIONS

- Thermocouple / Thermopile Amplifiers
- Strain Gauge / Pressure sensor Amplifiers
- Load Cell and Bridge Transducer Amplifiers
- High Resolution Data Acquisition
- Precision Current Sensing
- Battery monitoring
- Photo-Diode pre amplifier


■ PIN CONFIGURATION

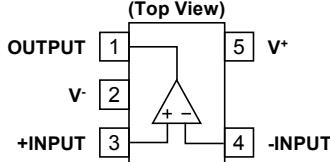

NJU7076F

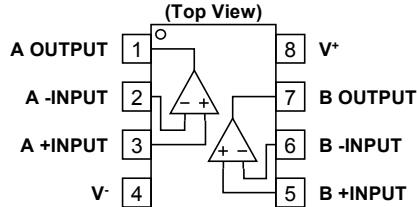

NJU7077R

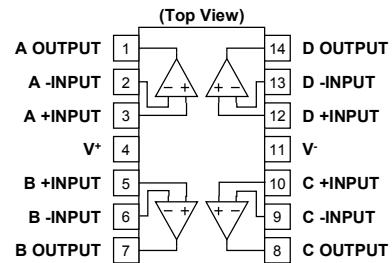

NJU7078V

■ ABSOLUTE MAXIMUM RATINGS(T_a=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺ - V ⁻	7 ⁽¹⁾	V
Differential Input Voltage ⁽²⁾	V _{ID}	±7 ⁽³⁾	V
Input Voltage	V _{IN}	V ⁻ 0.3 to V ⁺ 0.3	V
Power Dissipation ⁽⁴⁾	P _D	(2-layer / 4-layer) 480 / 650 500 / 660 555 / 690	mW
Operating Temperature Range	T _{opr}	-40 to +125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

(1) Supply Voltage is the voltage difference between V⁺ and V⁻.


(2) Differential voltage is the voltage difference between +INPUT and -INPUT.

(3) For supply voltage less than 7V, the absolute maximum rating is equal to the supply voltage.

(4) Power dissipation is the power that can be consumed by the IC at T_a=25°C, and is the typical measured value based on JEDEC condition. When using the IC over T_a=25°C subtract the value [mW/°C]=PD/(T_{stg(MAX)}-25) per temperature.

2-layer: EIA/JEDEC STANDARD Test board (76.2x114.3x1.6mm, 2layers, FR-4) mounting

4-layer: EIA/JEDEC STANDARD Test board (76.2x114.3x1.6mm, 4layers, FR-4) mounting

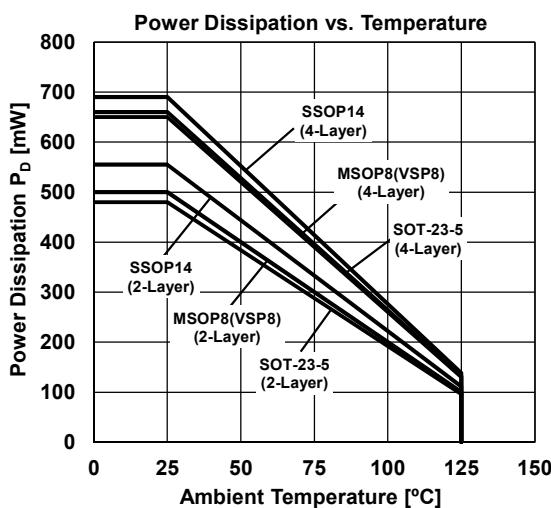

■ RECOMMENDED OPERATING CONDITIONS(T_a=25°C)

PARAMETER	Value	UNIT
Supply Voltage	+2.2 to +5.5 (±1.1 to ±2.75)	V

■ ELECTRICAL CHARACTERISTICS(V⁺=5V, V⁻=0V, V_{COM}=V⁺/2, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
DC CHARACTERISTICS						
Input Offset Voltage NJU7076/NJU7077	V _{IO}	Ta=-40°C to 125°C	-	20	150	μV
NJU7078		Ta=-40°C to 125°C	-	-	400	μV
		Ta=-40°C to 125°C	-	20	200	μV
		Ta=-40°C to 125°C	-	-	400	μV
Input Offset Voltage Drift	ΔV _{IO} /ΔT	Ta=-40°C to 125°C ⁽⁵⁾	-	0.5	5	μV/°C
Input Bias Current	I _B		-	1	-	pA
Input Offset Current	I _{IO}		-	1	-	pA
Open-Loop Voltage Gain	A _V	V _O =0.5V to 4.5V, R _L =10kΩ to 2.5V V _O =0.5V to 4.5V, R _L =10kΩ to 2.5V, Ta=-40°C to 125°C	100 100	130	-	dB
Common-Mode Rejection Ratio	CMR	V _{ICM} =0V to 4V V _{ICM} =0V to 4V, Ta=-40°C to 125°C	70 70	90	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ =2.2V to 5.5V V ⁺ =2.2V to 5.5V, Ta=-40°C to 125°C	70 70	90	-	dB
High-level Output Voltage	V _{OH}	R _L =10kΩ to 2.5V R _L =10kΩ to 2.5V, Ta=-40°C to 125°C R _L =600Ω to 2.5V R _L =600Ω to 2.5V, Ta=-40°C to 125°C I _{SOURCE} =2mA I _{SOURCE} =2mA, Ta=-40°C to 125°C	4.95 4.95 4.85 4.85 4.9 4.85	4.98 - 4.92 - 4.96 -	-	V
Low-level Output Voltage	V _{OL}	R _L =10kΩ to 2.5V R _L =10kΩ to 2.5V, Ta=-40°C to 125°C R _L =600Ω to 2.5V R _L =600Ω to 2.5V, Ta=-40°C to 125°C I _{SINK} =2mA I _{SINK} =2mA, Ta=-40°C to 125°C	- - - - - -	0.02 - 0.08 - 0.04 -	0.05 0.05 0.15 0.2 0.1 0.15	V
Common-Mode Input Voltage Range	V _{ICM}	CMR≥70dB CMR≥70dB, Ta=-40°C to 125°C	0 0	-	4	V
Supply Current(All Amplifiers)	I _{SUPPLY}	No Signal, R _L =OPEN No Signal, R _L =OPEN, Ta=-40°C to 125°C No Signal, R _L =OPEN No Signal, R _L =OPEN, Ta=-40°C to 125°C No Signal, R _L =OPEN No Signal, R _L =OPEN, Ta=-40°C to 125°C	- - - - - -	0.6 - 1.2 - 2.3 -	0.9 0.9 1.8 1.8 3.5 3.5	mA
AC CHARACTERISTICS						
Gain Bandwidth Product	GBW	G _V =40dB, R _F =100kΩ, R _L =10kΩ to 2.5V, C _L =20pF, f=100kHz	-	1.3	-	MHz
Phase Margin	Φ _m	G _V =40dB, R _F =100kΩ, R _L =10kΩ to 2.5V, C _L =20pF	-	60	-	deg
Gain Margin	G _m	G _V =40dB, R _F =100kΩ, R _L =10kΩ to 2.5V, C _L =20pF	-	12	-	dB
Equivalent Input Noise Voltage	e _n	f=1kHz	-	10	-	nV/√Hz
Slew Rate	SR	G _V =0dB, R _L =10kΩ to 2.5V, C _L =20pF, V _{IN} =3V _{PP}	-	0.5	-	V/μs
Total Harmonic Distortion + Noise	THD+N	G _V =20dB, R _L =10kΩ to 2.5V, f=1kHz, V _O =3V _{PP}	-	0.01	-	%
Channel Separation	CS	f=1kHz, NJU7077/NJU7078	-	140	-	dB







(5) Guaranteed by two points of Temperature -40°C and +125°C

■ ELECTRICAL CHARACTERISTICS($V^+=2.2V$, $V^- = 0V$, $V_{COM}=V^+/2$, $Ta=25^\circ C$, unless otherwise noted.)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
DC CHARACTERISTICS						
Input Offset Voltage NJU7076/NJU7077	V_{IO}	$Ta = -40^\circ C$ to $125^\circ C$	-	60	250	μV
NJU7078		$Ta = -40^\circ C$ to $125^\circ C$	-	-	400	μV
			-	60	300	μV
			-	-	400	μV
Input Offset Voltage Drift	$\Delta V_{IO}/\Delta T$	$Ta = -40^\circ C$ to $125^\circ C$ (5)	-	0.6	5	$\mu V/^\circ C$
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Open-Loop Voltage Gain	A_V	$V_o=0.6V$ to $1.6V$, $R_L=10k\Omega$ to $1.1V$ $V_o=0.6V$ to $1.6V$, $R_L=10k\Omega$ to $1.1V$, $Ta = -40^\circ C$ to $125^\circ C$	100 100	130 -	-	dB
Common-Mode Rejection Ratio	CMR	$V_{ICM}=0V$ to $1.2V$ $V_{ICM}=0V$ to $1.2V$, $Ta = -40^\circ C$ to $125^\circ C$	70 70	90 -	-	dB
High-level Output Voltage	V_{OH}	$R_L=10k\Omega$ to $1.1V$	2.15	2.18	-	V
		$R_L=10k\Omega$ to $1.1V$, $Ta = -40^\circ C$ to $125^\circ C$	2.15	-	-	V
		$R_L=600\Omega$ to $1.1V$	2.1	2.14	-	V
		$R_L=600\Omega$ to $1.1V$, $Ta = -40^\circ C$ to $125^\circ C$	2.05	-	-	V
		$I_{SOURCE}=2mA$	2.05	2.13	-	V
		$I_{SOURCE}=2mA$, $Ta = -40^\circ C$ to $125^\circ C$	2	-	-	V
Low-level Output Voltage	V_{OL}	$R_L=10k\Omega$ to $1.1V$	-	0.02	0.05	V
		$R_L=10k\Omega$ to $1.1V$, $Ta = -40^\circ C$ to $125^\circ C$	-	-	0.05	V
		$R_L=600\Omega$ to $1.1V$	-	0.06	0.1	V
		$R_L=600\Omega$ to $1.1V$, $Ta = -40^\circ C$ to $125^\circ C$	-	-	0.15	V
		$I_{SINK}=2mA$	-	0.07	0.15	V
		$I_{SINK}=2mA$, $Ta = -40^\circ C$ to $125^\circ C$	-	-	0.2	V
Common-Mode Input Voltage Range	V_{ICM}	CMR \geq 70dB CMR \geq 70dB, $Ta = -40^\circ C$ to $125^\circ C$	0 0	-	1.2 1.2	V
Supply Current(All Amplifiers)	I_{SUPPLY}	No Signal, $R_L=OPEN$	-	0.55	0.82	mA
		No Signal, $R_L=OPEN$, $Ta = -40^\circ C$ to $125^\circ C$	-	-	0.82	mA
		No Signal, $R_L=OPEN$	-	1.0	1.5	mA
		No Signal, $R_L=OPEN$, $Ta = -40^\circ C$ to $125^\circ C$	-	-	1.5	mA
		No Signal, $R_L=OPEN$	-	2.0	3.0	mA
		No Signal, $R_L=OPEN$, $Ta = -40^\circ C$ to $125^\circ C$	-	-	3.0	mA
AC CHARACTERISTICS						
Gain Bandwidth Product	GBW	$G_V=40dB$, $R_F=100k\Omega$, $R_L=10k\Omega$ to $1.1V$, $C_L=20pF$, $f=100kHz$	-	1.2	-	MHz
Phase Margin	Φ_m	$G_V=40dB$, $R_F=100k\Omega$, $R_L=10k\Omega$ to $1.1V$, $C_L=20pF$	-	60	-	deg
Gain Margin	G_m	$G_V=40dB$, $R_F=100k\Omega$, $R_L=10k\Omega$ to $1.1V$, $C_L=20pF$	-	12	-	dB
Equivalent Input Noise Voltage	e_n	$f=1kHz$	-	10	-	nV/\sqrt{Hz}
Slew Rate	SR	$G_V=0dB$, $R_L=10k\Omega$ to $1.1V$, $C_L=20pF$, $V_{IN}=1V_{PP}$	-	0.5	-	$V/\mu s$
Total Harmonic Distortion + Noise	THD+N	$G_V=20dB$, $R_L=10k\Omega$ to $1.1V$, $f=1kHz$, $V_O=1V_{PP}$	-	0.01	-	%
Channel Separation	CS	$f=1kHz$, NJU7077/NJU7078	-	140	-	dB

(5) Guaranteed by two points of Temperature $-40^\circ C$ and $+125^\circ C$







■ TYPICAL CHARACTERISTICS

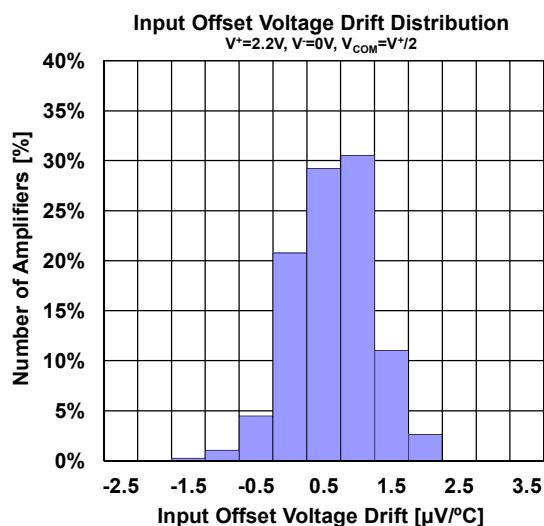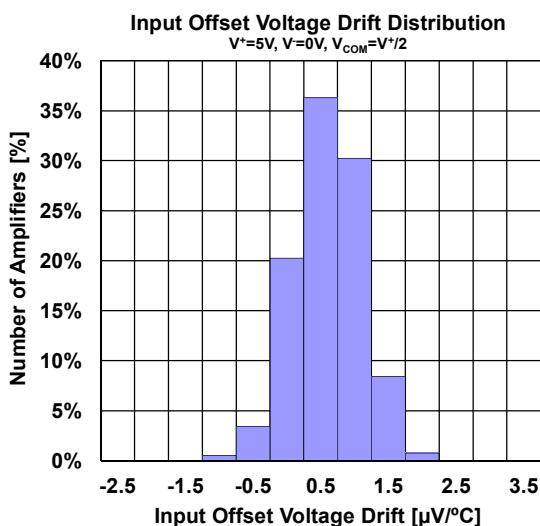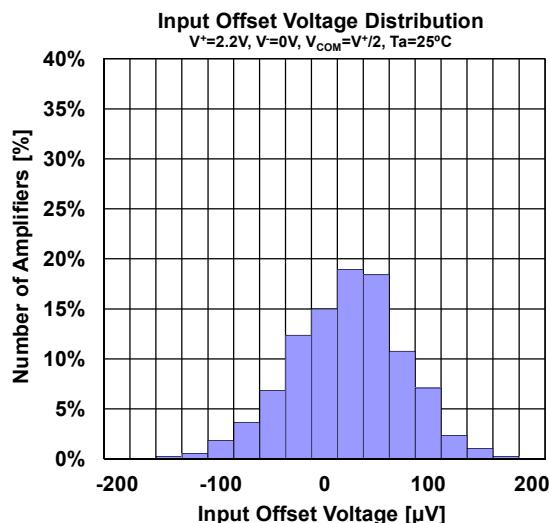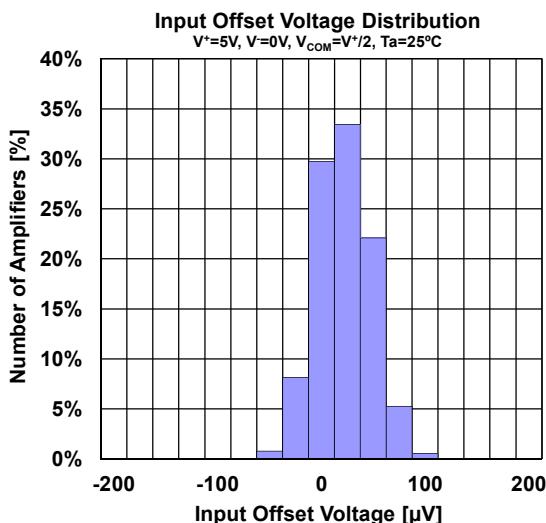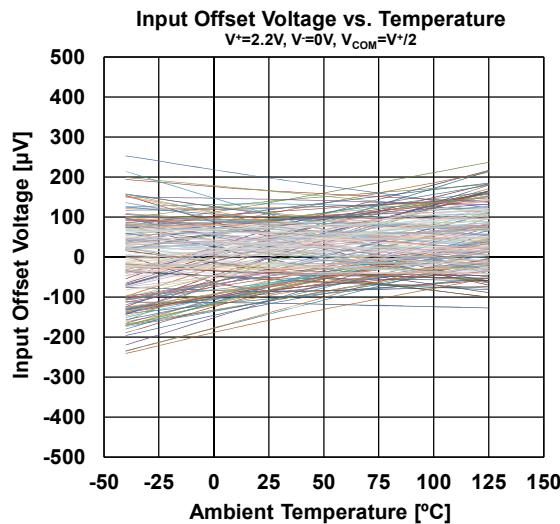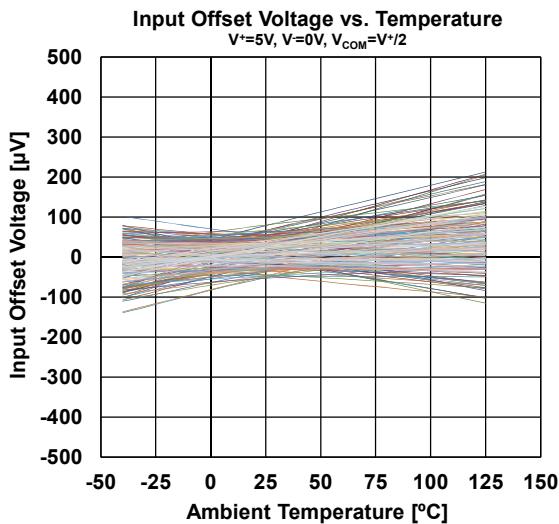







■ TYPICAL CHARACTERISTICS

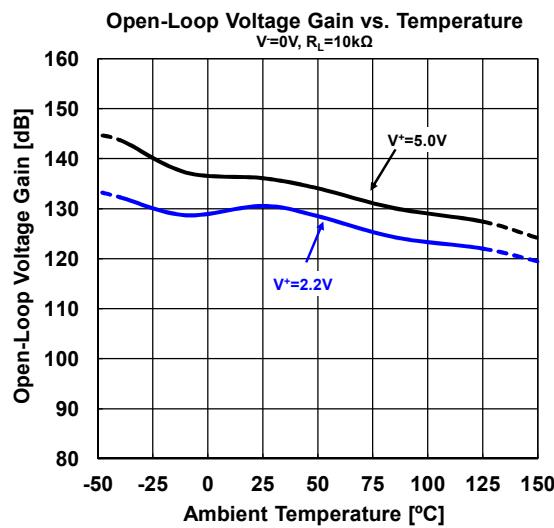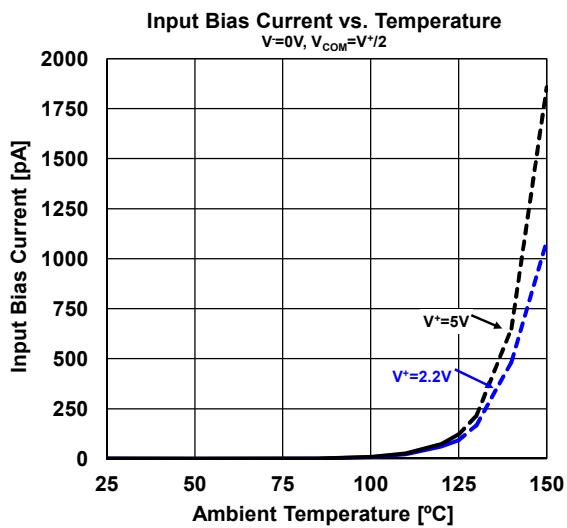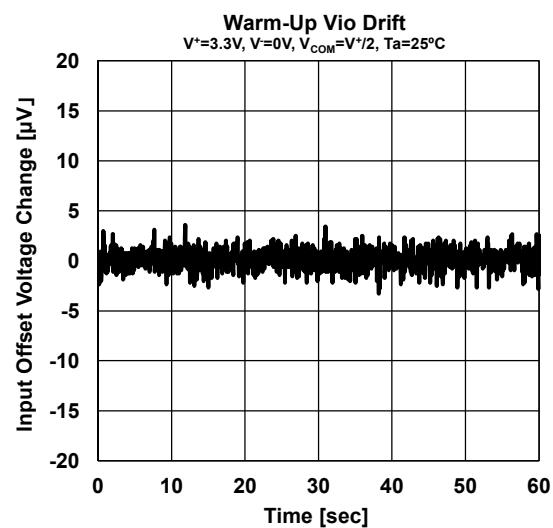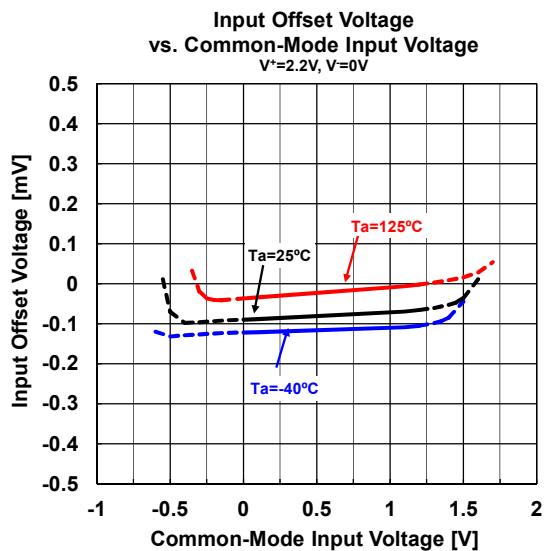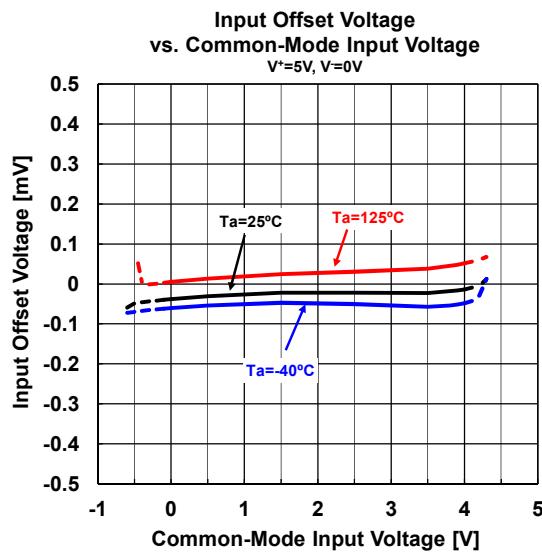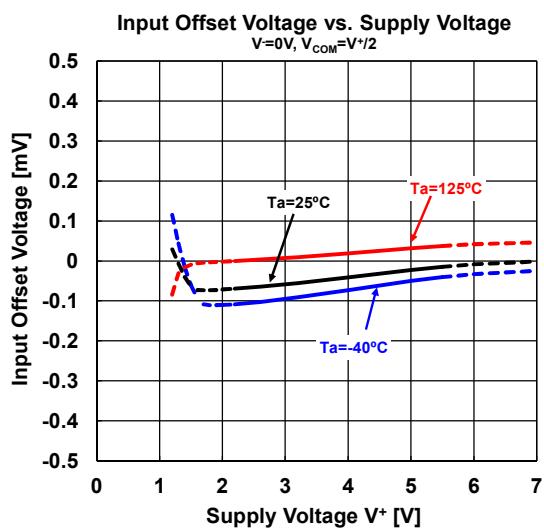







■ TYPICAL CHARACTERISTICS

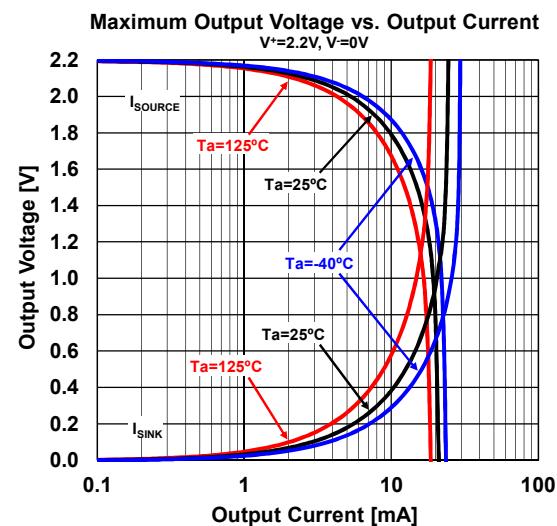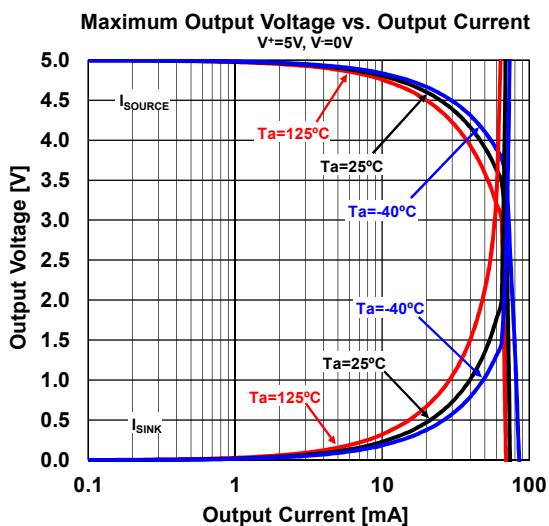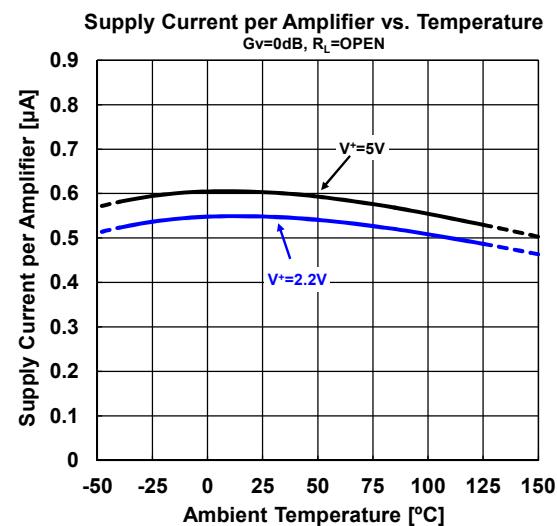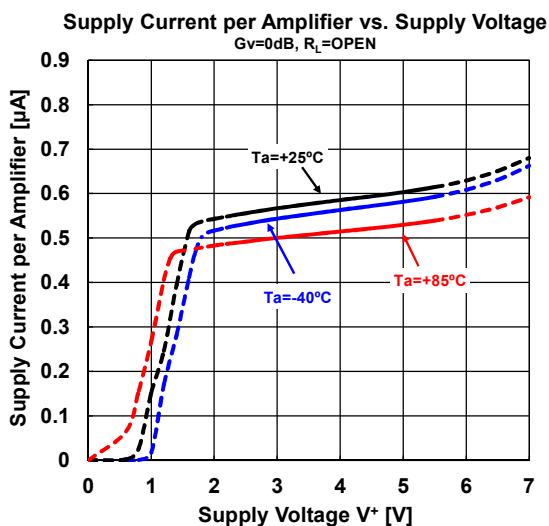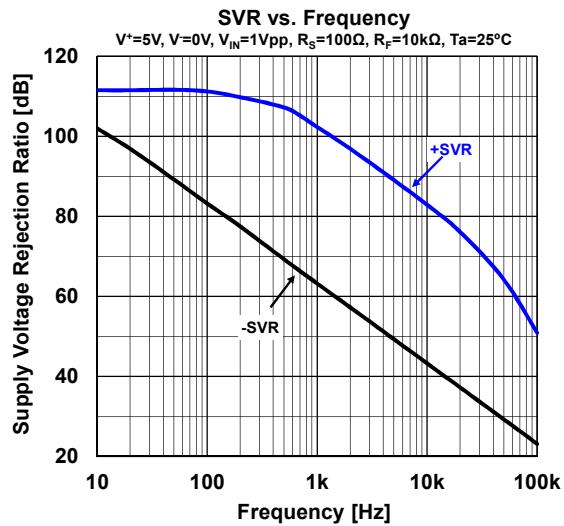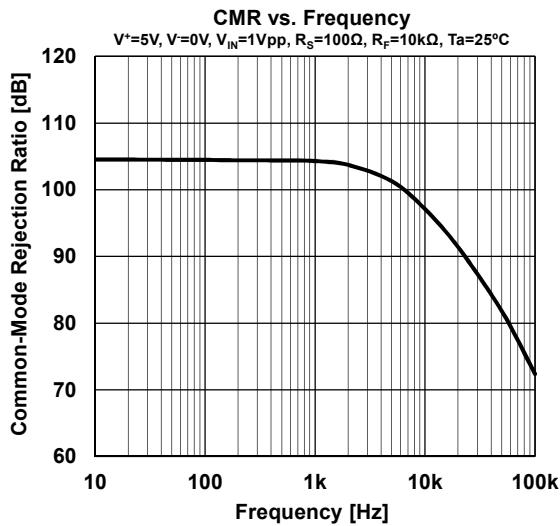


■ TYPICAL CHARACTERISTICS

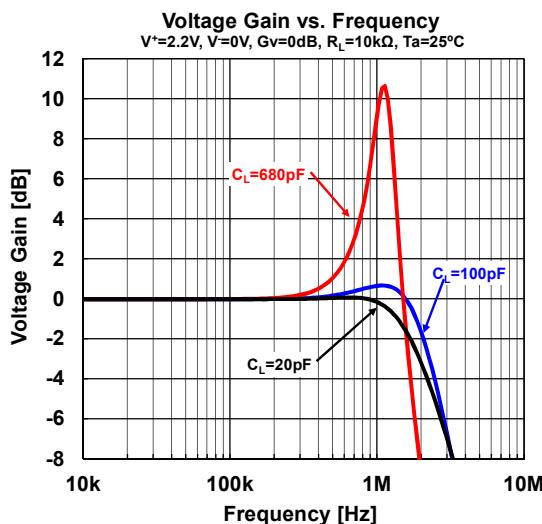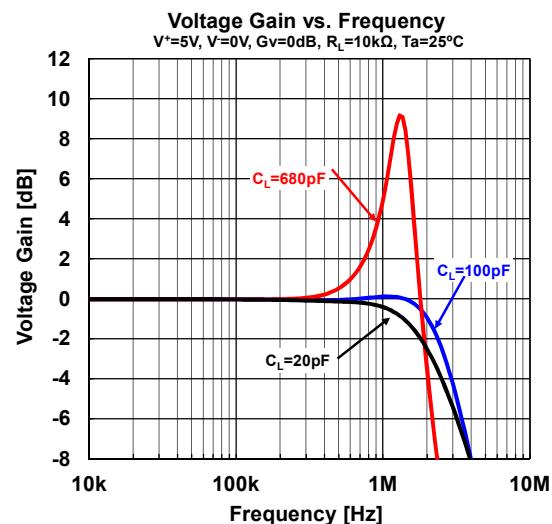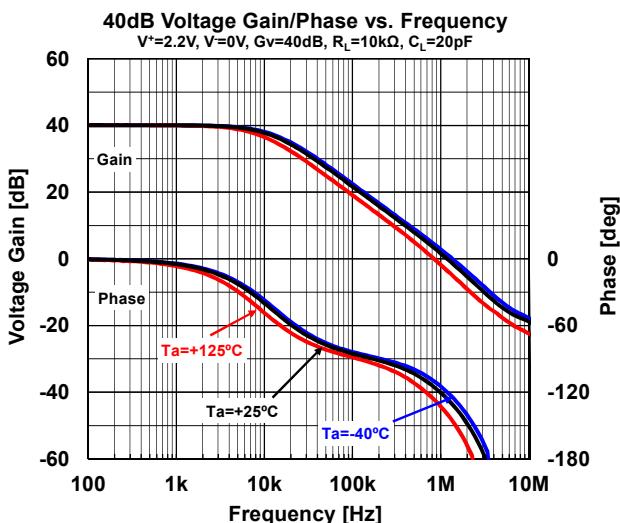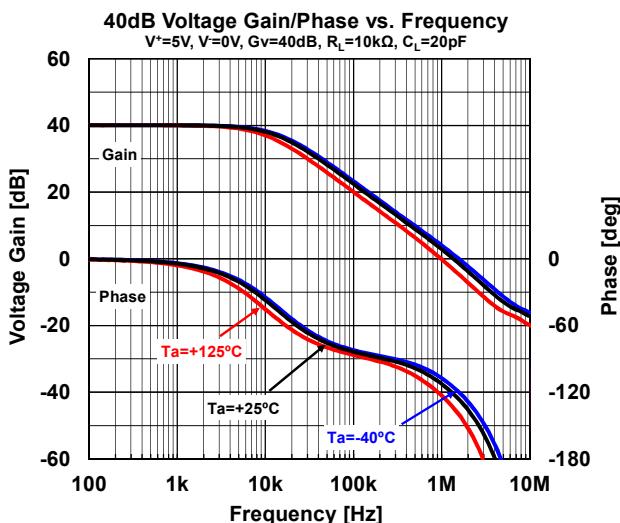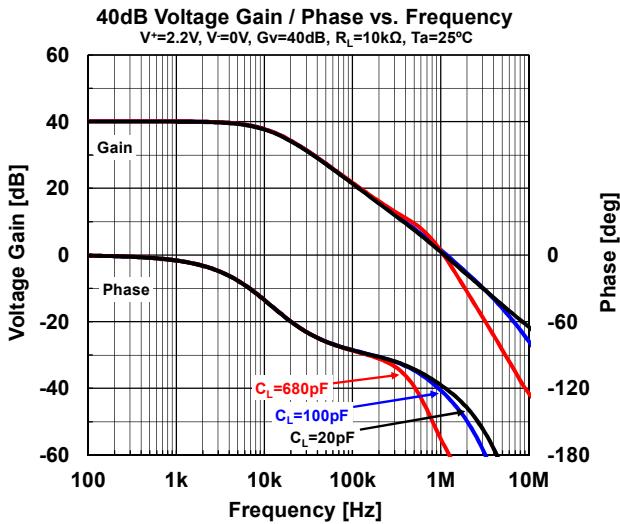
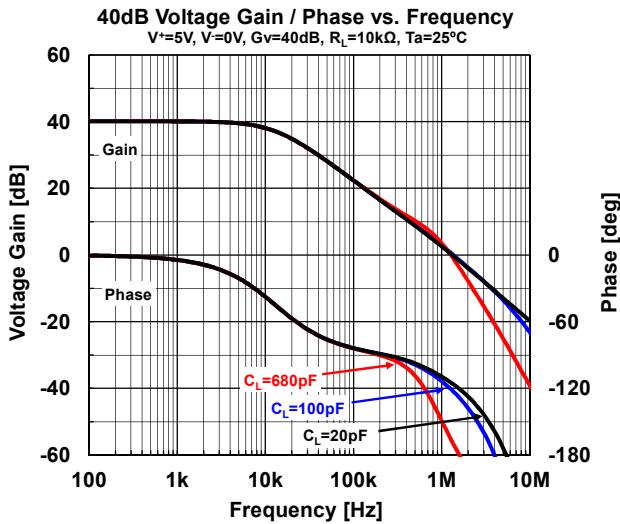


■ TYPICAL CHARACTERISTICS

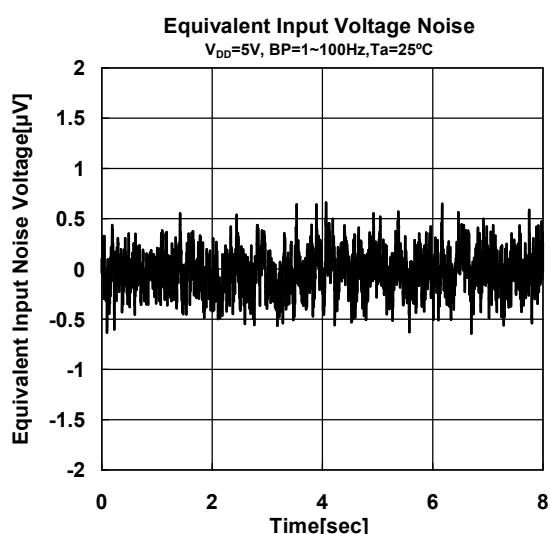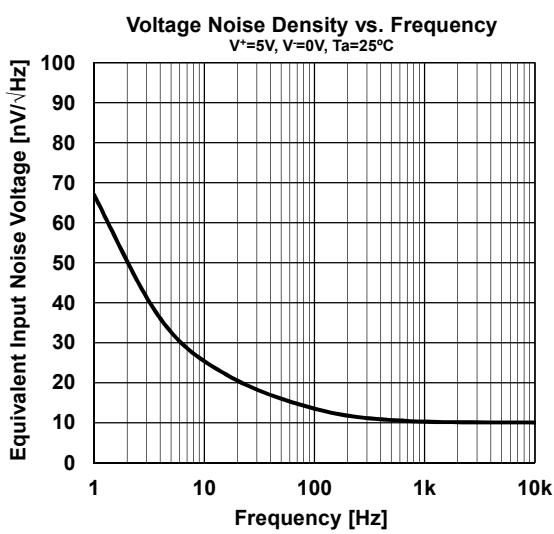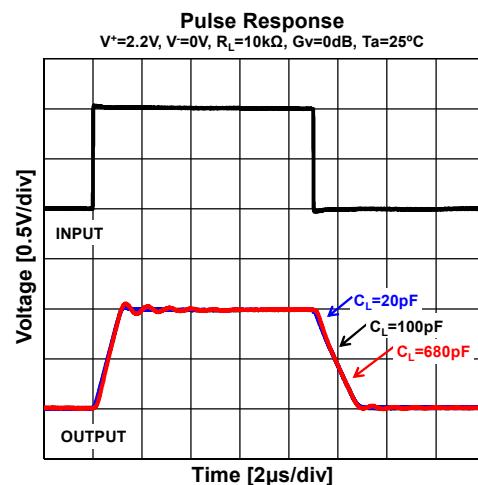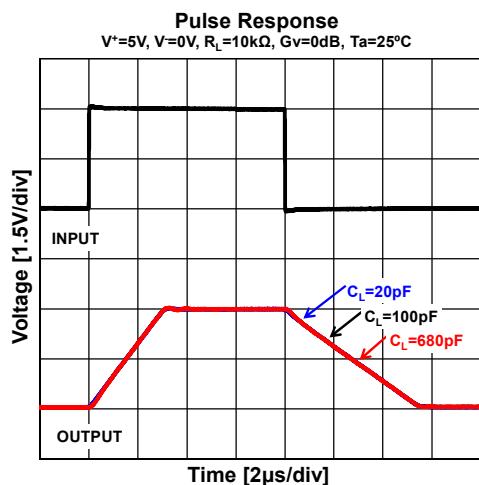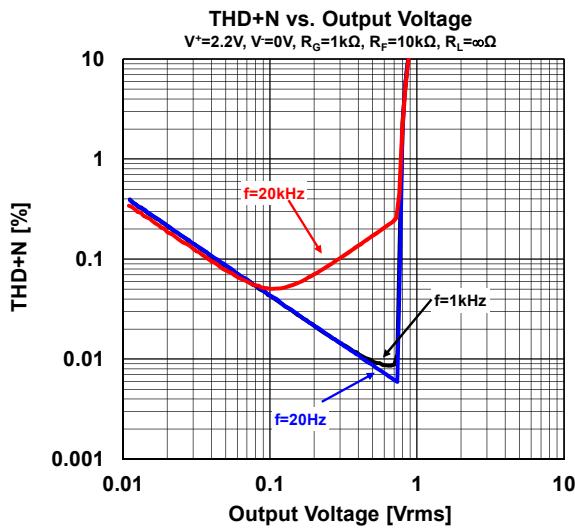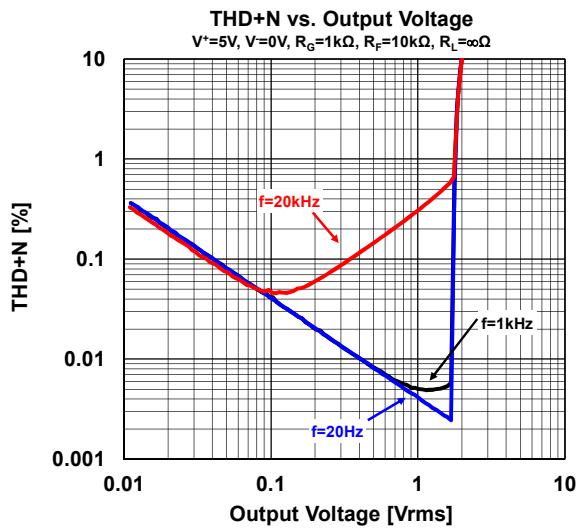


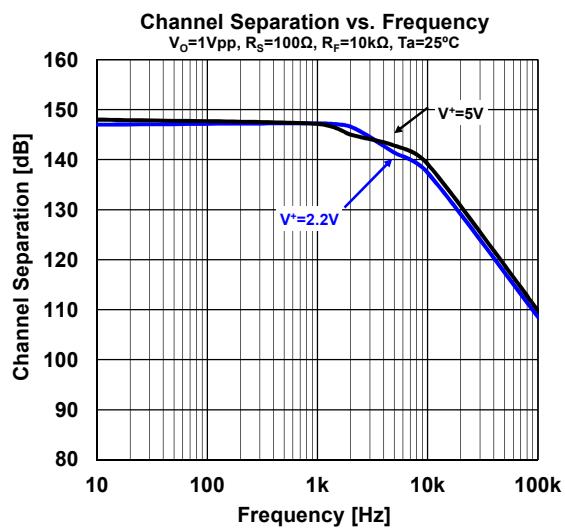
■ TYPICAL CHARACTERISTICS

■ PACKAGE DIMENSIONS

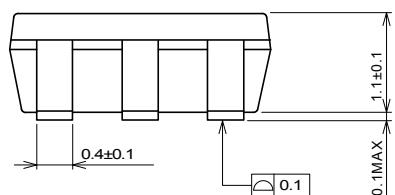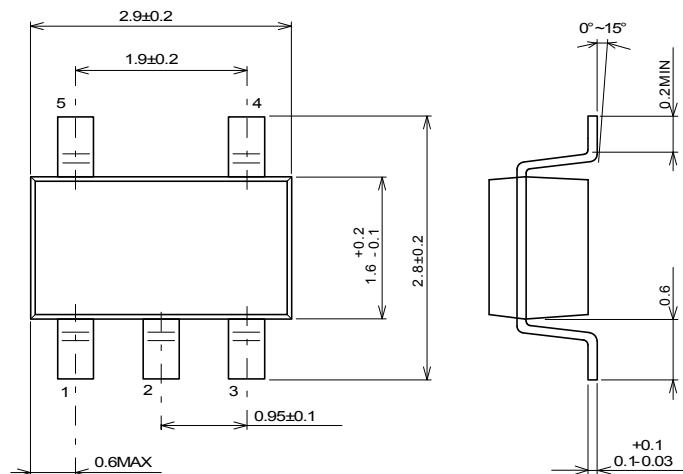

Unit: mm


SOT-23-5 Package

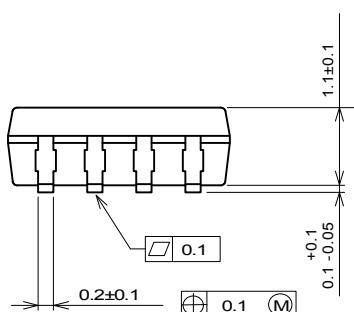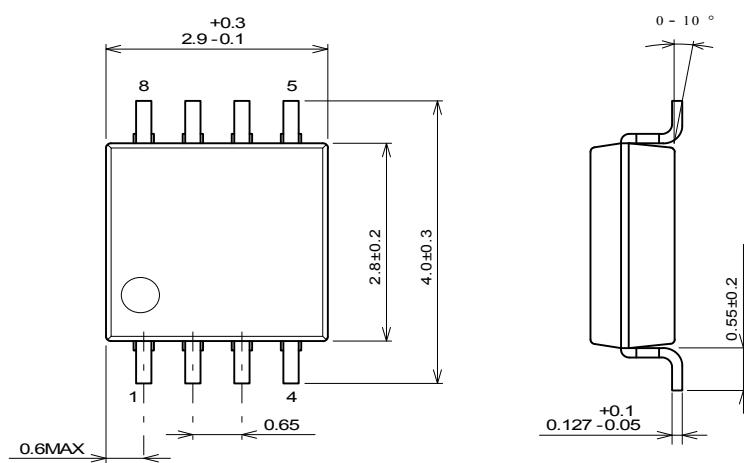

Unit: mm

MSOP8(VSP8)* Package
*MEET JEDEC MO-187-DA

■ PACKAGE DIMENSIONS

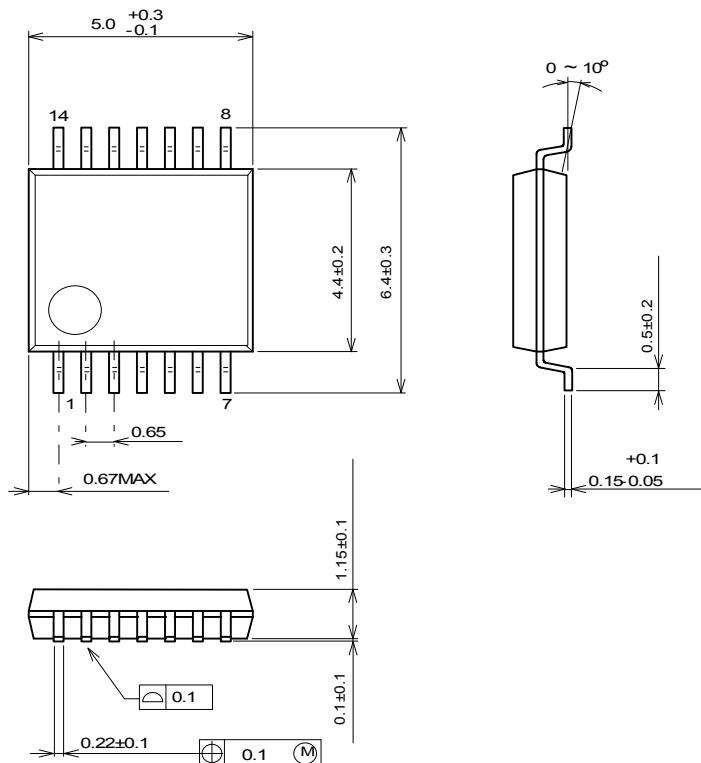

Unit: mm

SSOP14 Package

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

[NJU7076BF3-TE1](#) [NJU7076F-TE1](#) [NJU7076F-TE2](#) [NJU7078V-TE1](#)