

## Quad 2 channel multiplexer (3-state)

Datasheet – production data


### Features

- High speed:  $t_{PD} = 4.8 \text{ ns (typ.)}$  at  $V_{CC} = 5 \text{ V}$
- Low power dissipation  
 $I_{CC} = 4 \mu\text{A (max.)}$  at  $T_A = 25 \text{ }^\circ\text{C}$
- Compatible with TTL outputs  
 $V_{IH} = 2 \text{ V (min.)}$ ,  $V_{IL} = 0.8 \text{ V (max.)}$
- Power-down protection on inputs and outputs
- Symmetrical output impedance  
 $|I_{OH}| = I_{OL} = 8 \text{ mA (min.)}$
- Balanced propagation delays:  $t_{PLH} \cong t_{PHL}$
- Operating voltage range:  $V_{CC(opr)} = 4.5 \text{ to } 5.5 \text{ V}$
- Pin and function compatible with 74 series 257
- Improved latch-up immunity
- Low noise:  $V_{OLP} = 0.8 \text{ V (max.)}$

### Description

The 74VHCT257A is an advanced high-speed CMOS quad 2 channel multiplexer (3-state) fabricated with sub-micron silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology.

It is composed of four independent 2 channel multiplexers with common select and enable input ( $\overline{OE}$ ). The VHCT257A is a non-inverting multiplexer.

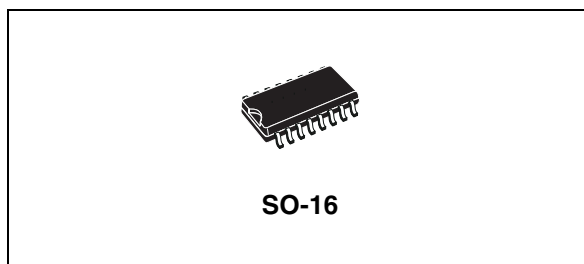

**Table 1. Order code**


Package	Tape and reel
SO-16	74VHCT257AMTR

When the enable input is held “high”, all outputs become high impedance state. If the select input is held “low”, “A” data is selected, when select input is “high”, “B” data is chosen.

Power-down protection is provided on all inputs and outputs and 0 to 7 V can be accepted on inputs with no regard to the supply voltage. This device can be used to interface 5 V to 3 V since all inputs are equipped with TTL threshold.


All inputs and outputs are equipped with protection circuits against static discharge, giving them 2 KV ESD immunity and transient excess voltage.

**Figure 1. Pin connection and IEC logic symbols**

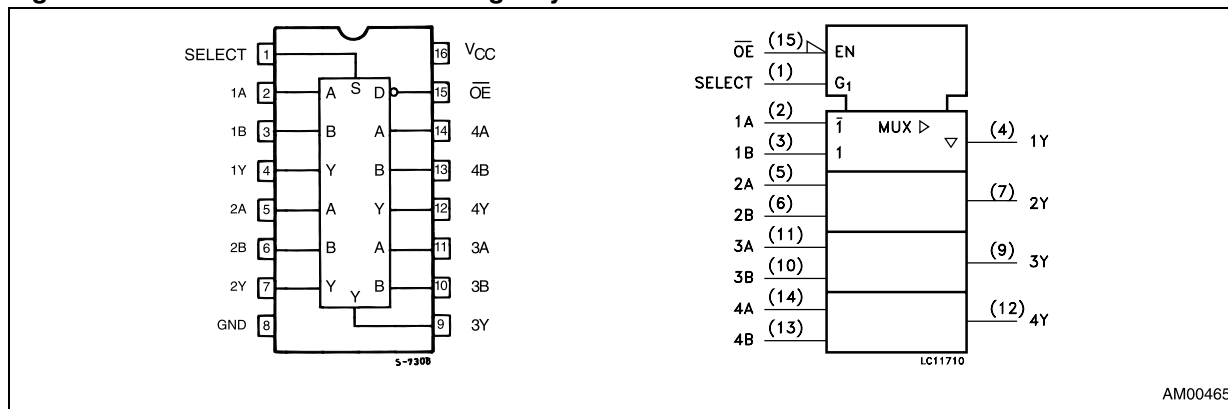

# 1 Input equivalent circuit

Figure 2. Input equivalent circuit

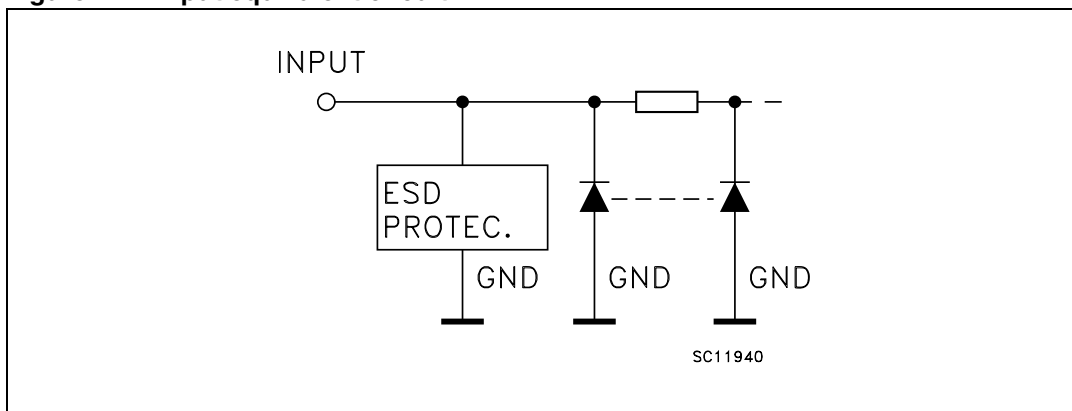

## 2 Pin settings

**Table 2. Pin description**


Pin No	Symbol	Name and function
1	SELECT	Common data select inputs
2, 5, 11, 14	1A to 4A	Data inputs from source A
3, 6, 10, 13	1B to 4B	Data inputs from source B
4, 7, 9, 12	1Y to 4Y	3-state multiplexer outputs
15	$\overline{\text{OE}}$	3-state output enable inputs (active LOW)
8	GND	Ground (0 V)
16	$V_{\text{CC}}$	Positive supply voltage

**Table 3. Truth table**

Inputs				Output
$\overline{\text{OE}}$	SELECT	A	B	Y
H	$X^{(1)}$	$X^{(1)}$	$X^{(1)}$	$Z^{(2)}$
L	L	L	$X^{(1)}$	L
L	L	H	$X^{(1)}$	H
L	H	$X^{(1)}$	L	L
L	H	$X^{(1)}$	H	H

1. "Don't care".
2. High impedance.

Figure 3. Logic diagram

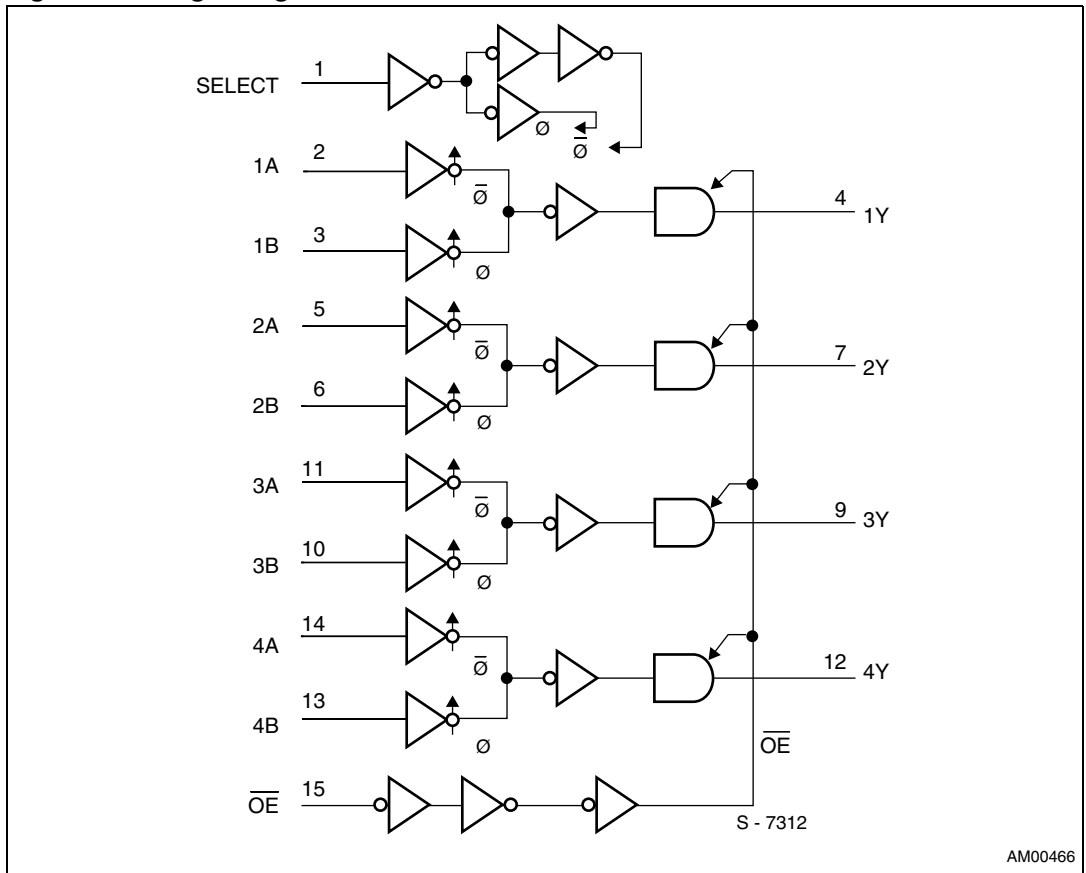

1. This logic diagram has not be used to estimate propagation delays.

### 3 Maximum ratings

**Table 4. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply voltage	-0.5 to +7.0	V
$V_I$	DC input voltage	-0.5 to +7.0	V
$V_O$	DC output voltage <sup>(1)</sup>	-0.5 to +7.0	V
$V_O$	DC output voltage <sup>(2)</sup>	-0.5 to $V_{CC} + 0.5$	V
$I_{IK}$	DC input diode current	- 20	mA
$I_{OK}$	DC output diode current	$\pm 20$	mA
$I_O$	DC output current	$\pm 25$	mA
$I_{CC}$ or $I_{GND}$	DC $V_{CC}$ or ground current	$\pm 50$	mA
$T_{stg}$	Storage temperature	-65 to +150	°C
$T_L$	Lead temperature (10 sec.)	300	°C

1. Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied: output in OFF state.
2. Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied: high or low state.

**Table 5. Recommended operating conditions**

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply voltage	4.5 to 5.5	V
$V_I$	Input voltage	0 to 5.5	V
$V_O$	Output voltage <sup>(1)</sup>	0 to 5.5	V
$V_O$	Output voltage <sup>(2)</sup>	0 to $V_{CC}$	V
$T_{op}$	Operating temperature	-55 to 125	°C
dt/dv	Input rise and fall time <sup>(3)</sup> ( $V_{CC} = 5.0 \pm 0.5$ V)	0 to 20	ns/V

1. Output in OFF state.
2. High or low state.
3.  $V_{IN}$  from 0.8 V to 2 V.

## 4 Electrical characteristics

Table 6. DC specifications

Symbol	Parameter	Test condition		Value						Unit	
		V <sub>CC</sub> (V)		T <sub>A</sub> = 25 °C			-40 to 85 °C		-55 to 125 °C		
				Min.	Typ.	Max.	Min.	Max.	Min.		Max.
V <sub>IH</sub>	High level input voltage	4.5 to 5.5		2			2		2		V
V <sub>IL</sub>	Low level input voltage	4.5 to 5.5				0.8		0.8		0.8	V
V <sub>OH</sub>	High level output voltage	4.5	I <sub>O</sub> = -50 μA	4.4	4.5		4.4		4.4		V
		4.5	I <sub>O</sub> = -8 mA	3.94			3.8		3.7		
V <sub>OL</sub>	Low level output voltage	4.5	I <sub>O</sub> = 50 μA		0.0	0.1		0.1		0.1	V
		4.5	I <sub>O</sub> = 8 mA			0.36		0.44		0.55	
I <sub>OZ</sub>	High impedance output leakage current	5.5	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> V <sub>O</sub> = 0 V to 5.5 V			±0.25		±2.5		±2.5	μA
I <sub>I</sub>	Input leakage current	0 to 5.5	V <sub>I</sub> = 5.5 V or GND			±0.1		±1.0		±1.0	μA
I <sub>CC</sub>	Quiescent supply current	5.5	V <sub>I</sub> = V <sub>CC</sub> or GND			4		40		40	μA
+I <sub>CC</sub>	Additional worst case supply current	5.5	One input at 3.4 V, other input at V <sub>CC</sub> or GND			1.35		1.5		1.5	mA
I <sub>OPD</sub>	Output leakage current	0	V <sub>OUT</sub> = 5.5 V			0.5		5.0		5.0	μA

**Table 7. AC electrical characteristics (input  $t_r = t_f = 3$  ns)**

Symbol	Parameter	Test condition		Value						Unit	
		$V_{CC}^{(1)}$ (V)	$C_L$ (pF)	$T_A = 25\text{ }^\circ\text{C}$			$-40\text{ to }85\text{ }^\circ\text{C}$		$-55\text{ to }125\text{ }^\circ\text{C}$		
				Min.	Typ.	Max.	Min.	Max.	Min.		Max.
$t_{PLH}$ $t_{PHL}$	Propagation delay time A, B, to Y	5.0	15		4.8	7.0	1.0	8.0	1.0	8.0	ns
		5.0	50		5.5	8.0	1.0	9.0	1.0	9.0	
$t_{PLH}$ $t_{PHL}$	Propagation delay time SELECT to Y	5.0	15		6.0	6.8	1.0	8.0	1.0	8.0	ns
		5.0	50		7.0	8.8	1.0	10.0	1.0	10.0	
$t_{PZL}$ $t_{PZH}$	Output enable time	5.0	15		5.8	6.8	1.0	8.0	1.0	8.0	ns
		5.0	50		6.5	8.8	1.0	10.0	1.0	10.0	
$t_{PLZ}$ $t_{PHZ}$	Output disable time	5.0	50		5.7	7.9	1.0	9.0	1.0	9.0	ns

1. Voltage range is  $5.0\text{ V} \pm 0.5\text{ V}$ .

**Table 8. Capacitive characteristics**

Symbol	Parameter	Test condition		Value						Unit	
				$T_A = 25\text{ }^\circ\text{C}$			$-40\text{ to }85\text{ }^\circ\text{C}$		$-55\text{ to }125\text{ }^\circ\text{C}$		
				Min.	Typ.	Max.	Min.	Max.	Min.		Max.
$C_{IN}$	Input capacitance				4	10		10		10	pF
$C_{OUT}$	Output capacitance				6						pF
$C_{PD}$	Power dissipation capacitance <sup>(1)</sup>				23						pF

1. CPD is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to [Figure 5: Test circuit](#)). Average operating current can be obtained by equation:  
 $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}/4$  (per channel).

**Table 9. Dynamic switching characteristics**

Symbol	Parameter	Test condition		Value						Unit	
		$V_{CC}$ (V)		$T_A = 25\text{ }^\circ\text{C}$			$-40\text{ to }85\text{ }^\circ\text{C}$		$-55\text{ to }125\text{ }^\circ\text{C}$		
				Min.	Typ.	Max.	Min.	Max.	Min.		Max.
$V_{OLP}$ $V_{OLV}$	Dynamic low voltage quiet output <sup>(1),(2)</sup>	5.0	$C_L = 50\text{ pF}$		0.3	0.8					V
				-0.8	-0.3						
$V_{IHD}$	Dynamic high voltage input <sup>(1),(3)</sup>	5.0		2.0							
$V_{ILD}$	Dynamic low voltage input <sup>(1),(3)</sup>	5.0				0.8					

1. Worst case package.

2. Max. number of outputs defined as (n). Data inputs are driven 0 V to 3.0 V, (n-1) outputs switching and one output at GND.

3. Max. number of data inputs (n) switching. (n-1) switching 0 V to 3.0 V. Inputs under test switching: 3.0 V to threshold ( $V_{ILD}$ ), 0 V to threshold ( $V_{IHD}$ ),  $f = 1\text{ MHz}$ .

## 5 Test circuit

Figure 4. Test circuit

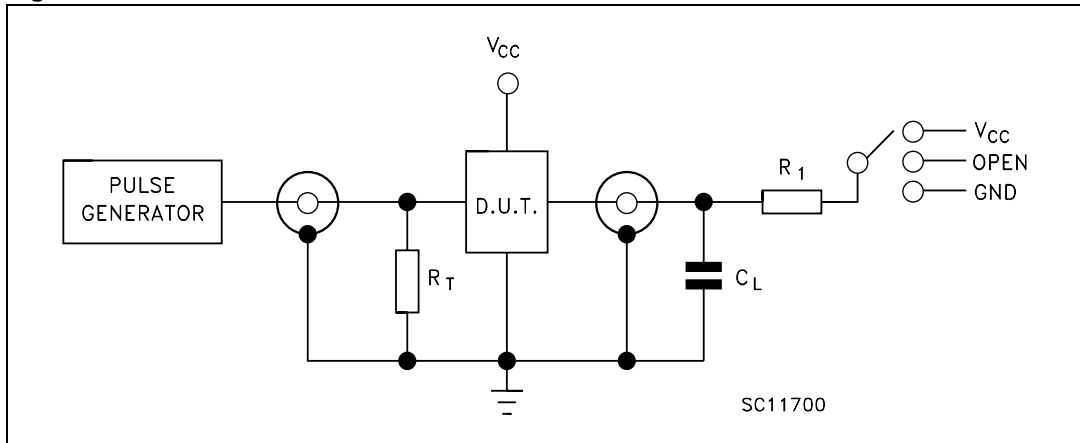


Table 10. Switch configuration

Type	Input		Load		Switch position		
	$V_I$	$t_p, t_f$	$C_L$	$R_L$	$t_{PHL}, t_{PLH}$	$t_{PZH}, t_{PHZ}$	$t_{PZL}, t_{PLZ}$
74VHCT257	3 V	6 ns	50 pF	1 k $\Omega$	Open	GND	$V_{CC}$

$C_L = 15/ 50$  pF or equivalent (includes jig and probe capacitance).


$R_L = R_1 = 1$  K $\Omega$  or equivalent.

$R_T = Z_{OUT}$  of pulse generator (typically 50  $\Omega$ ).



## 6 Waveforms

**Figure 5. Waveform - propagation delays for inverting conditions  
(f = 1 mhz; 50% duty cycle)**

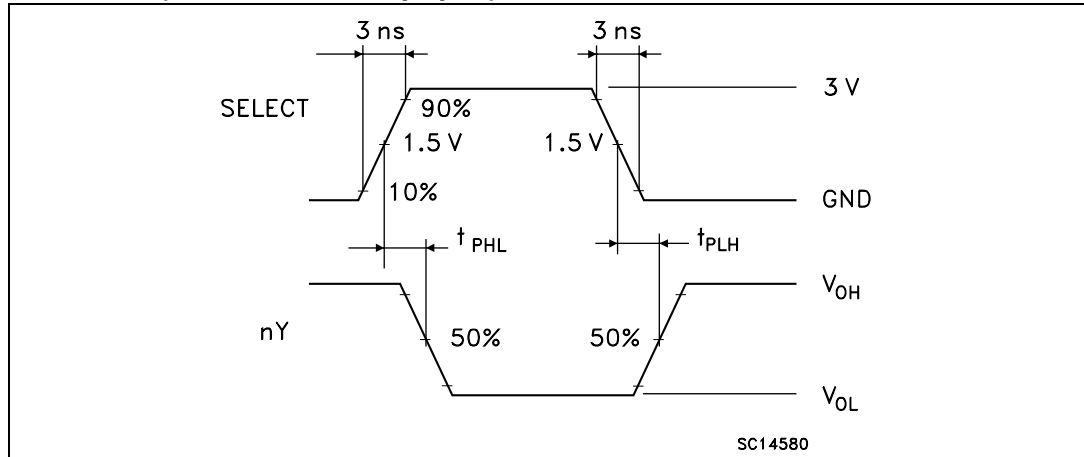

**Figure 6. Waveform - propagation delays for non-inverting conditions  
(f = 1 MHz; 50% duty cycle)**


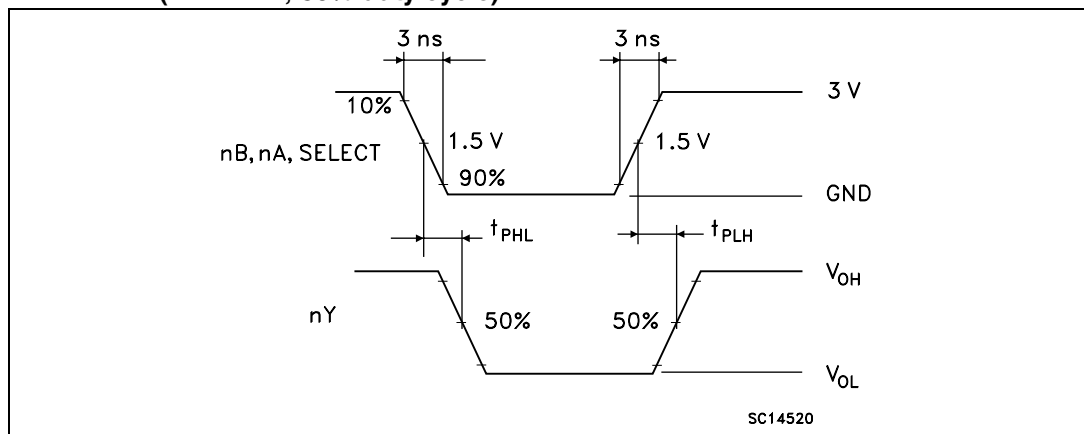



Figure 7. Waveform - output enable and disable time (f = 1 MHz; 50% duty cycle)

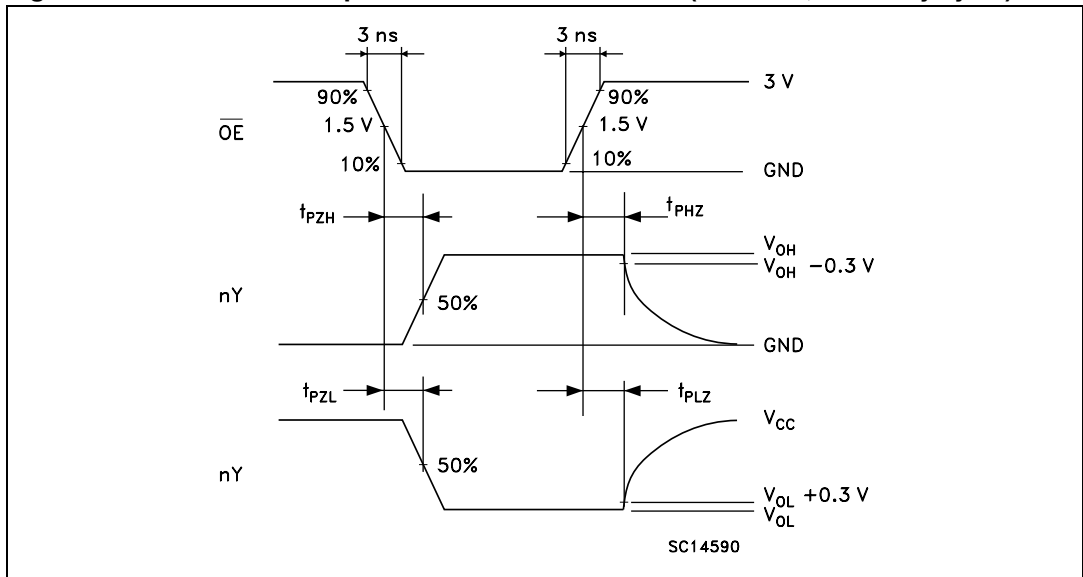

## 7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

Figure 8. SO-16 package outline

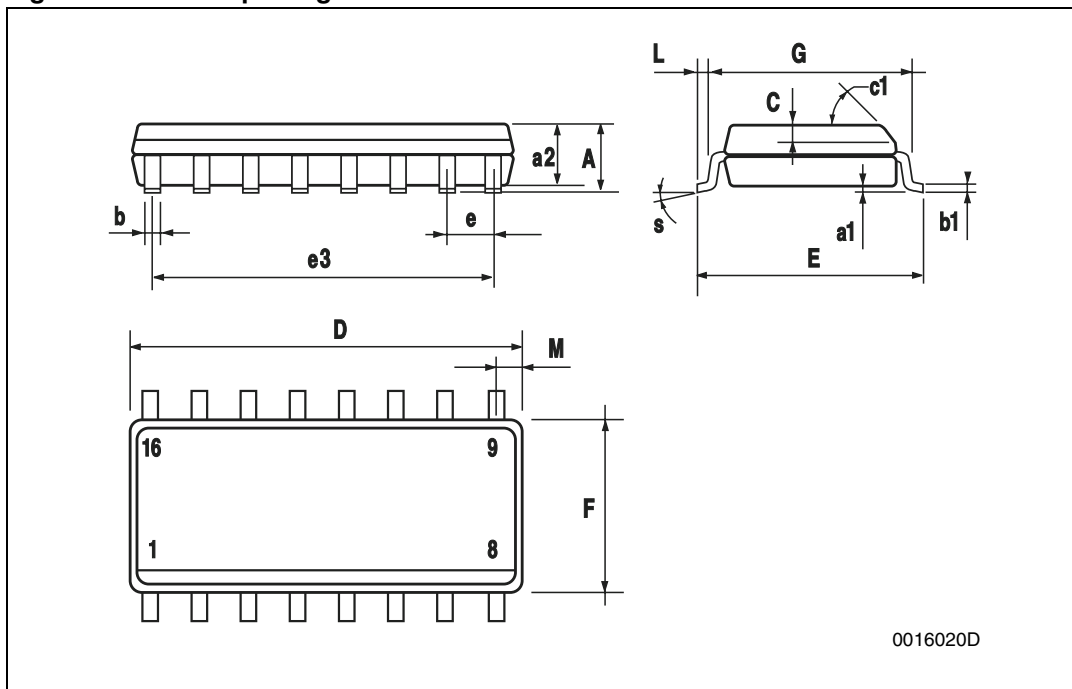


0016020D

Table 11. SO-16 mechanical data

Symbol	Dimensions					
	mm			inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.068
a1	0.1		0.25	0.004		0.010
a2			1.64			0.063
b	0.35		0.46	0.013		0.018
b1	0.19		0.25	0.007		0.010
C		0.5		0.019		
c1	45° (typ.)					
D	9.8		10	0.385		0.393
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		8.89			0.350	
F	3.8		4.0	0.149		0.157
G	4.6		5.3	0.181		0.208
L	0.5		1.27	0.019		0.050
M			0.62			0.024
S	8° (max.)					

Figure 9. SO-16 tape and reel

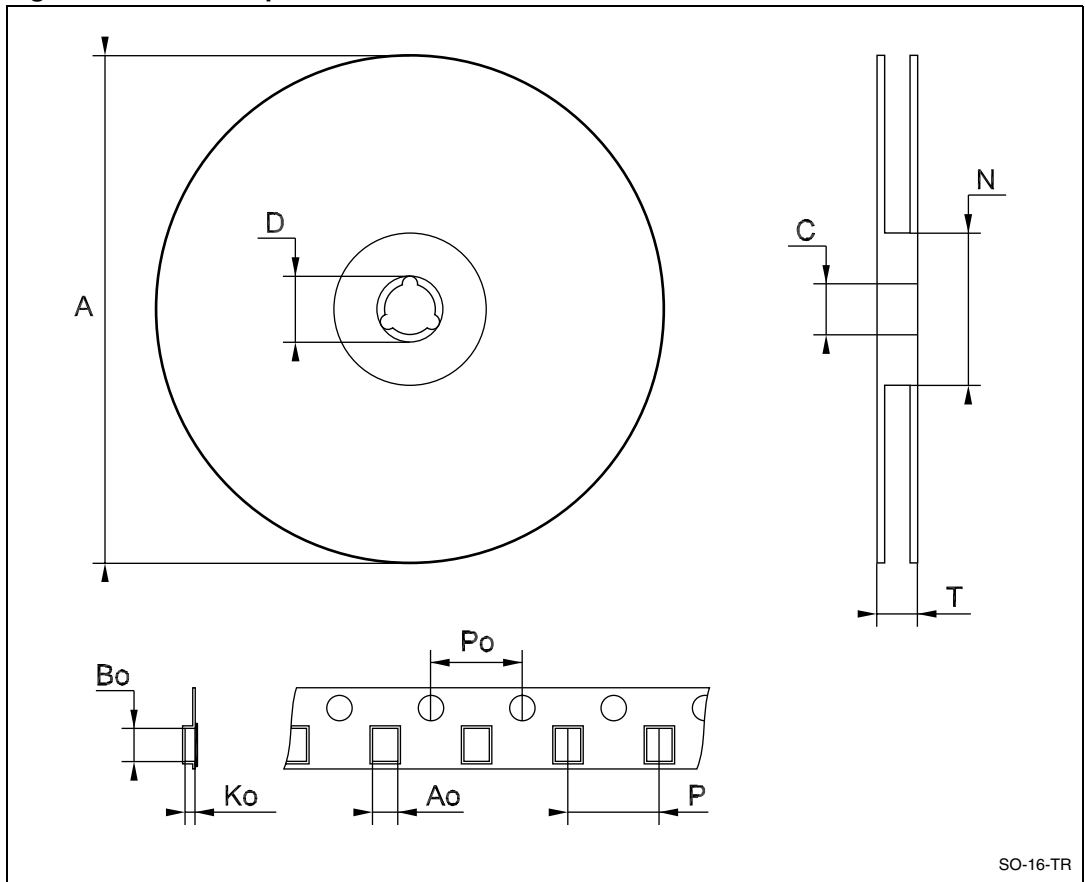

1. drawing not in scale.

Table 12. SO-16 tape and reel mechanical data

Symbol	Dimensions					
	mm			inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
<b>A</b>			330			12.992
<b>C</b>	12.8		13.2	0.504		0.519
<b>D</b>	20.2			0.795		
<b>N</b>	60			2.362		
<b>T</b>			22.4			0.882
<b>Ao</b>	6.45		6.65	0.254		0.262
<b>Bo</b>	10.3		10.5	0.406		0.414
<b>Ko</b>	2.1		2.3	0.082		0.090
<b>Po</b>	3.9		4.1	0.153		0.161
<b>P</b>	7.9		8.1	0.311		0.319

## Revision history

**Table 13. Document revision history**

Date	Revision	Changes
16-Dec-2004	3	Order Codes Revision - pag. 1.
21-Nov-2012	4	Removed 74VHCT257ATTR device and TSSOP package from document. Replaced SOP by SO16 package on page 1. Added numbered headings to <a href="#">Section 1: Input equivalent circuit</a> to <a href="#">Section 7: Package information</a> . Updated <a href="#">Table 10</a> (removed 74HC257 device, 74HCT257 replaced by 74VHCT257 device). Updated <a href="#">Section 7: Package information</a> , added ECOPACK®. Minor text corrections throughout document.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)





Поставка электронных компонентов

**Юридический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.

**Фактический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.  
ИНН 780277764  
КПП 780501001

Р/С 40702810422510004035 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в Санкт-Петербурге К/С 30101810900000000703  
БИК 044030703

**Телефон:** 8 (812) 309-44-11 (многоканальный)

**Факс:** 8 (812) 309-44-11

**Электронная почта:** [sales@timechips.ru](mailto:sales@timechips.ru)

**Сайт:** [timechips.ru](http://timechips.ru)

## Информационное письмо

Компания «ТаймЧипс» - одна из наиболее динамично развивающихся компаний в сфере поставок электронных компонентов. Мы поставляем широкую номенклатуру электронных компонентов отечественных и импортных производителей, как напрямую, так и с крупных мировых складов, позволяющих охватить выборочную номенклатуру более 300 брендов, а также специализируемся на поставках дисплеев и является официальным дистрибьютором компании Shenzhen Startek Electronic Technology Co, на территории Российской Федерации.

Наличие собственной логистики позволяет в кратчайшие сроки доставлять товар нашим клиентам. В нашей компании имеется Конструкторский отдел, где наши специалисты проводят технические консультации клиентов, квалифицированную поддержку и помощь российским разработчикам. Осуществляем Поставки импортной продукции под контролем ВП МО РФ, на предприятия Оборонно-промышленного комплекса России. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001-2011.

Благодаря нацеленности на результат, мы уверенно занимаем новые позиции на рынке, заинтересовывая Клиента не только актуальными ценами и гибким подходом, но и постоянным вниманием.

**Миссия** – обеспечение долгосрочного и взаимовыгодного партнерства с клиентами.

**Наша цель** – Обеспечение клиентам самого широкого ассортимента электронных компонентов и бесперебойности поставок.

**Мы - это развитие! Мы задаем темп! Мы разные, но вместе! Мы работаем для вас!**

Так же имеем прямые поставки от производителей:

TAI-SAW Пав-компоненты ([www.taisaw.com](http://www.taisaw.com))

TRANSCOM СВЧ-компоненты ([www.transcominc.com.tw](http://www.transcominc.com.tw))

Mini Circuits ВЧ-СВЧ-компоненты ([minicircuits.com](http://minicircuits.com))

SAMTEC- разъемы ([www.samtec.com](http://www.samtec.com))

4Star Разъемы РЧ (Даташиты по продукции 4Star, которые Вы сможете загрузить по этой ссылке: <https://yadi.sk/i/tPjnmGGrpmbYj>)

ULNION Преобразователи напряжения ([converterdc.com/](http://converterdc.com/))



**Отличные рекомендации на рынке, уверенность в качестве поставляемой продукции делают нас надежными партнерами для наших клиентов.**

**«ТаймЧипс» - это:**

- Гарантия качества поставляемой продукции;
- Широкий ассортимент;
- Минимальные сроки поставок;
- Техническая поддержка;
- Подбор комплектации;
- Индивидуальный подход;
- Гибкие цены.

**Модули, микросхемы, пассивные компоненты, Xilinx (XC), Altera (EP,EPF, EPM) и силовая электроника** – это наши ведущие позиции, на поставку которых мы гарантированно дадим Вам самые выгодные предложения!

**В структуру компании так же входит конструкторский отдел, который помогает разработчикам и конструкторам в решении следующих задач:**

- Оценка стоимости проекта по компонентам;
- Подбор оптимального решения при выборе компонента;
- Подбор аналогов;
- Техническая поддержка;
- Консультации у производителей;
- Поставка прототипов;

*С Уважением, Чернов Павел.*

*Руководитель отдела продаж ООО "ТАЙМЧИПС"*

*Официальный дистрибьютор Shenzhen Startek Electronic Technology Co.,Ltd в России (USB Display Modules , LED Displays, Serial Modules).*

<http://www.timechips.ru/>

<http://lcd-timechips.ru/>

**Телефон: +7 (812) 309-44-11 доб. 141**

**Факс: +7 (812) 309-44-11 доб. 152**

**Моб. Тел. +7 (905) 232-40-65**

**Skype: time.chips5**

**Электронная почта: [manager1@timechips.ru](mailto:manager1@timechips.ru)**

---