




REVISIONS					
P.	LTR	DESCRIPTION	DATE	DWN	APVD
	R1	REVISED PER ECO-16-004800	10SEP2016	NK	MZ
	S	REVISED PER ECO-16-018356	23MAR2017	RS	MZ

D


C

B

A

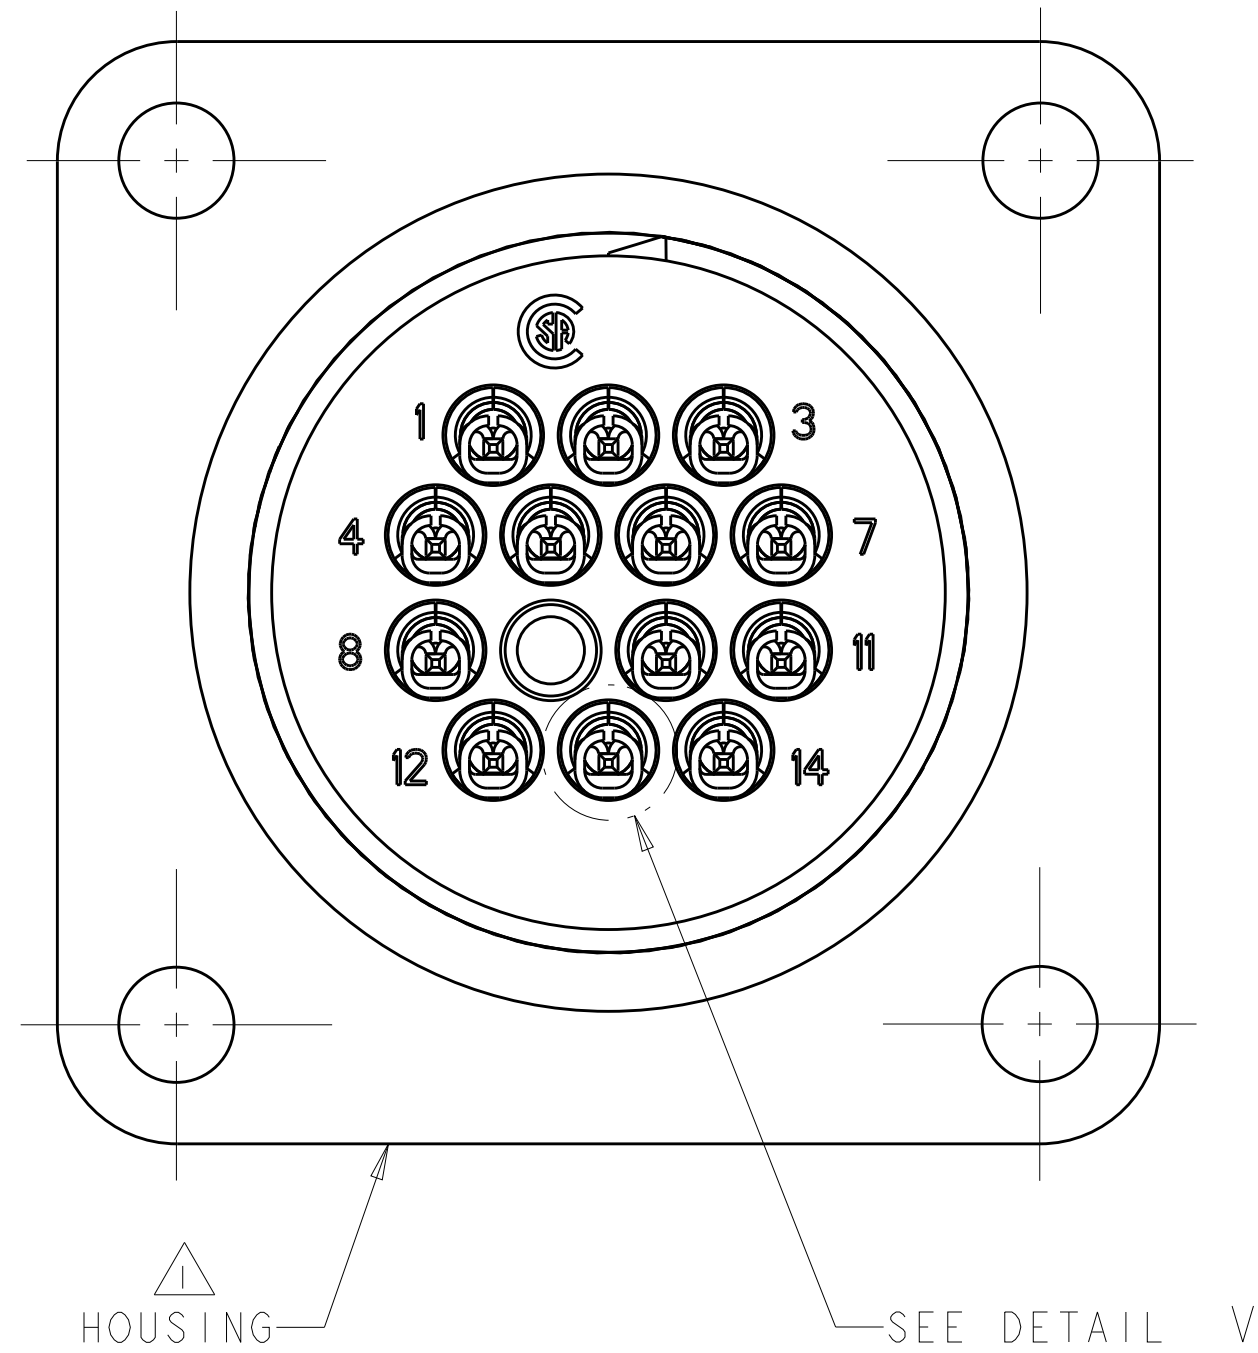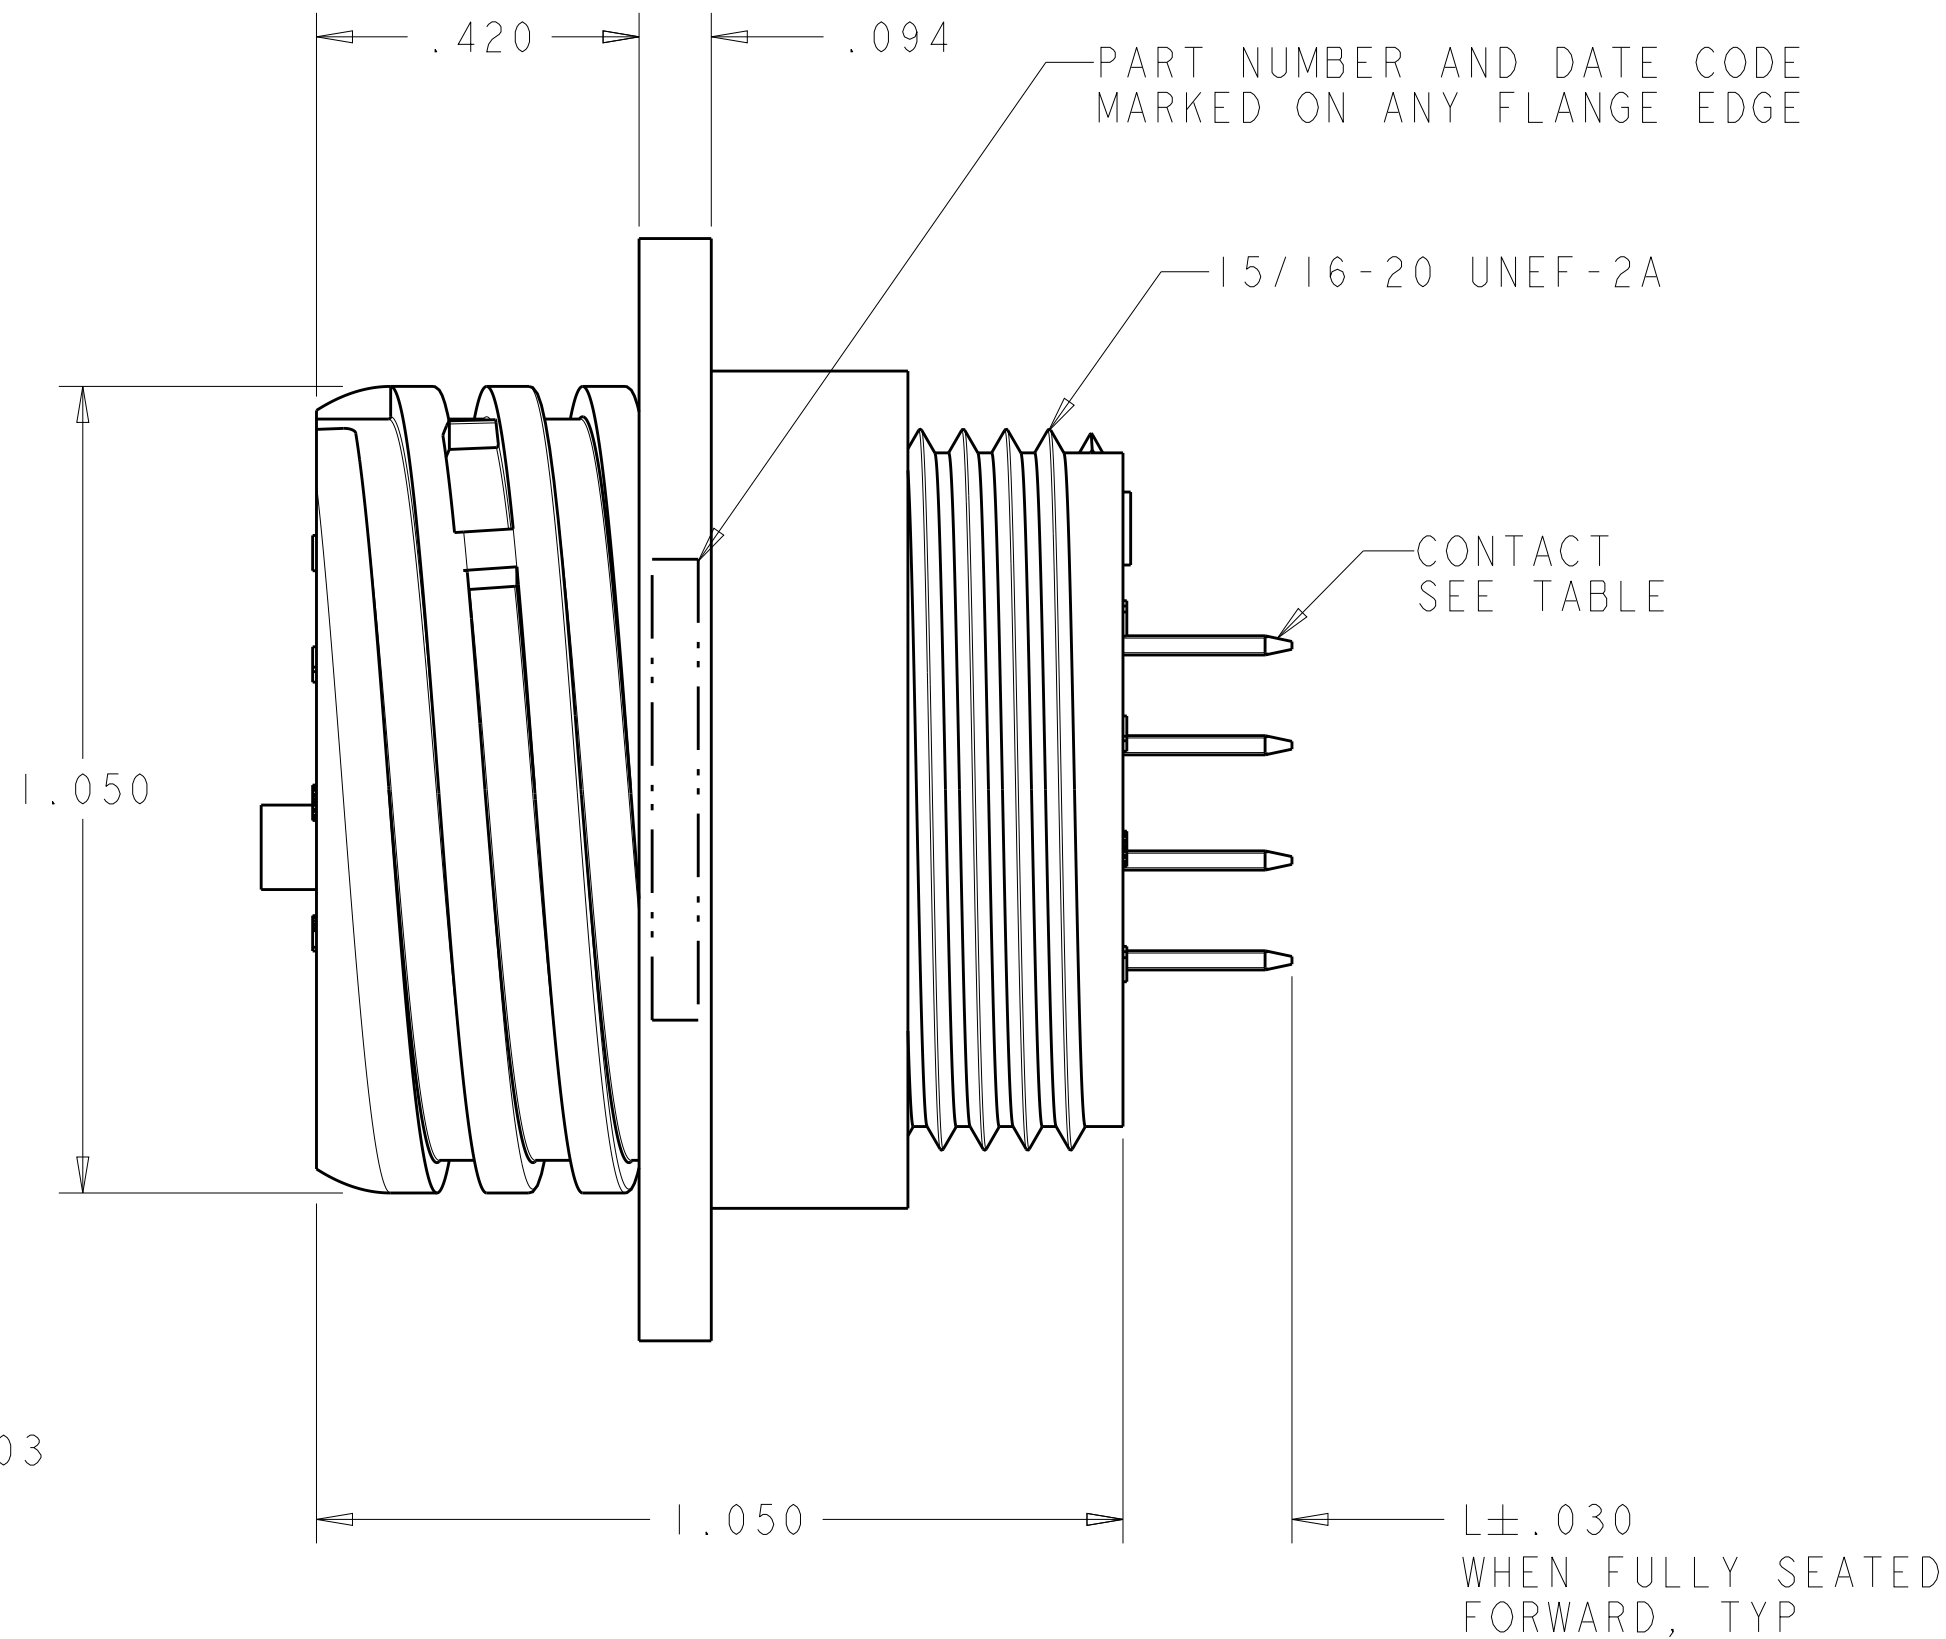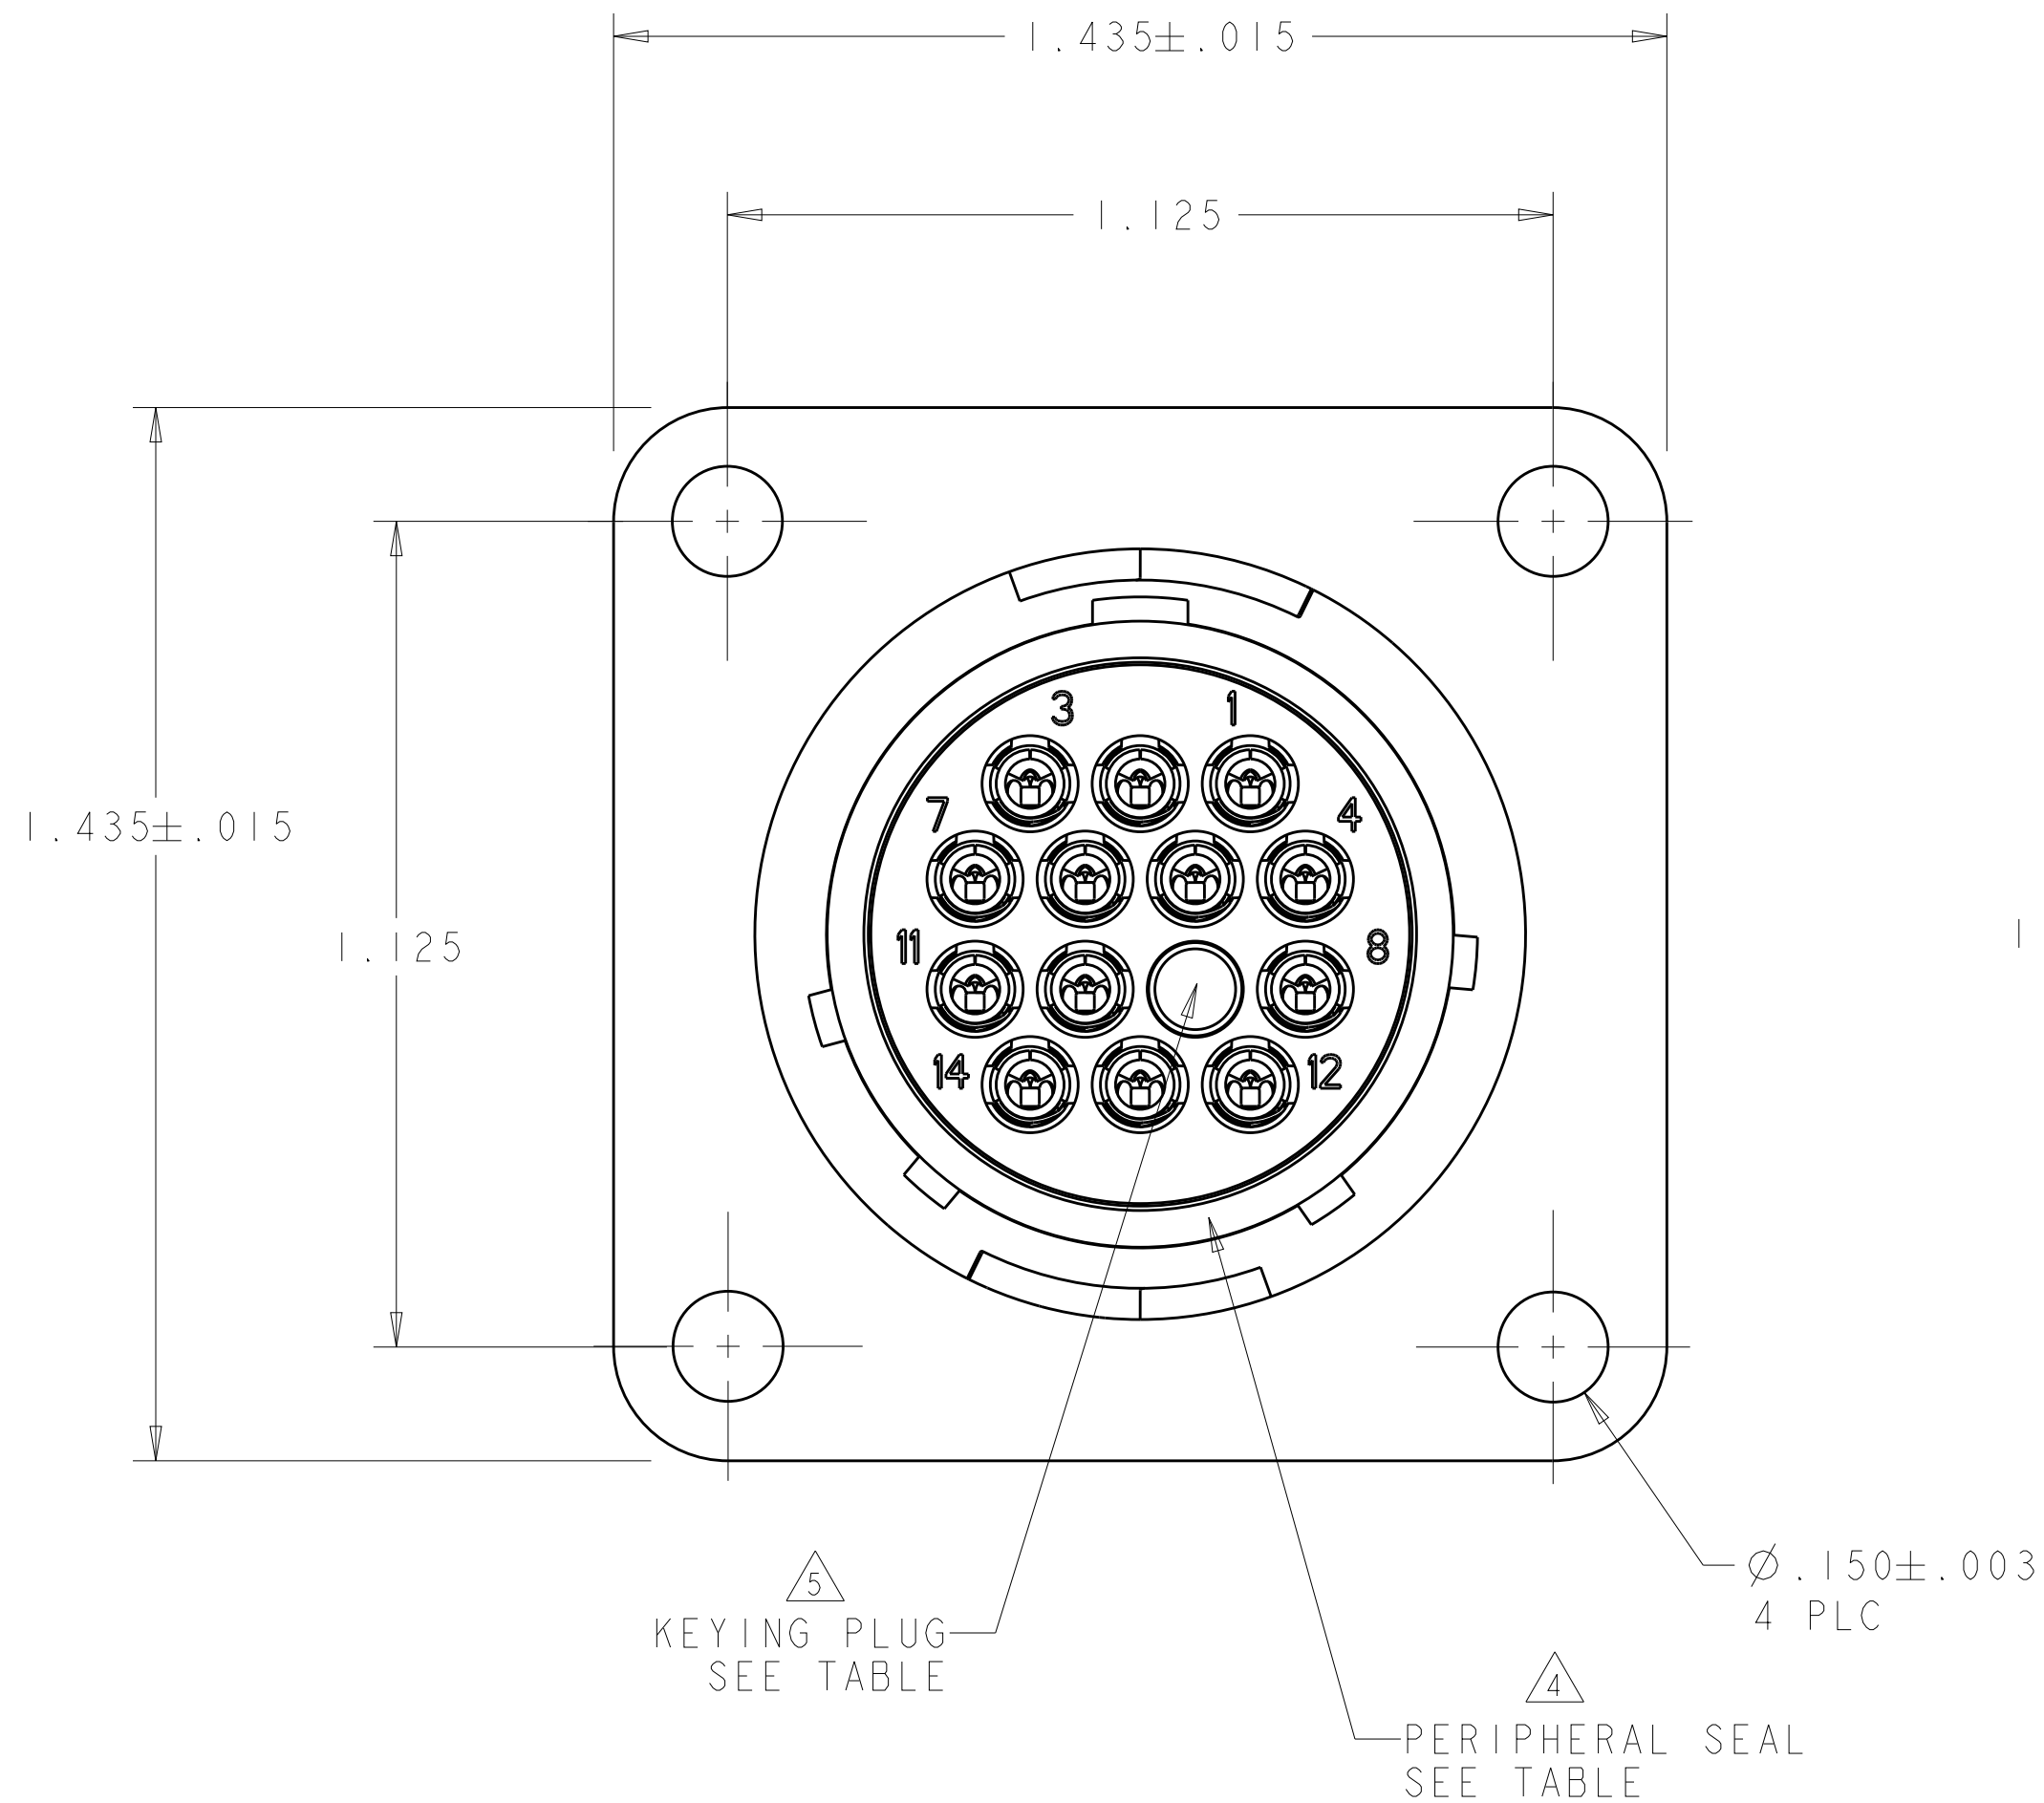

- 1 HOUSING: NYLON, UL 94 V-O RATED, BLACK.
- 2 CONTACT:
BODY - BRASS, .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
POST - BRASS, .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
- 3 CONTACT:
BODY - BRASS, .000100 MIN TIN OVER .000050 MIN NICKEL.
POST - BRASS, .000100 MIN TIN OVER .000050 MIN NICKEL.
- 4 PERIPHERAL SEAL: ELASTOMER, GRAY.
- 5 KEYING PLUG: NYLON, NATURAL.
- 6 .009 MAXIMUM CONTACT LEAD-IN SEAM GAP PERMISSIBLE ON MATING FACE END.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

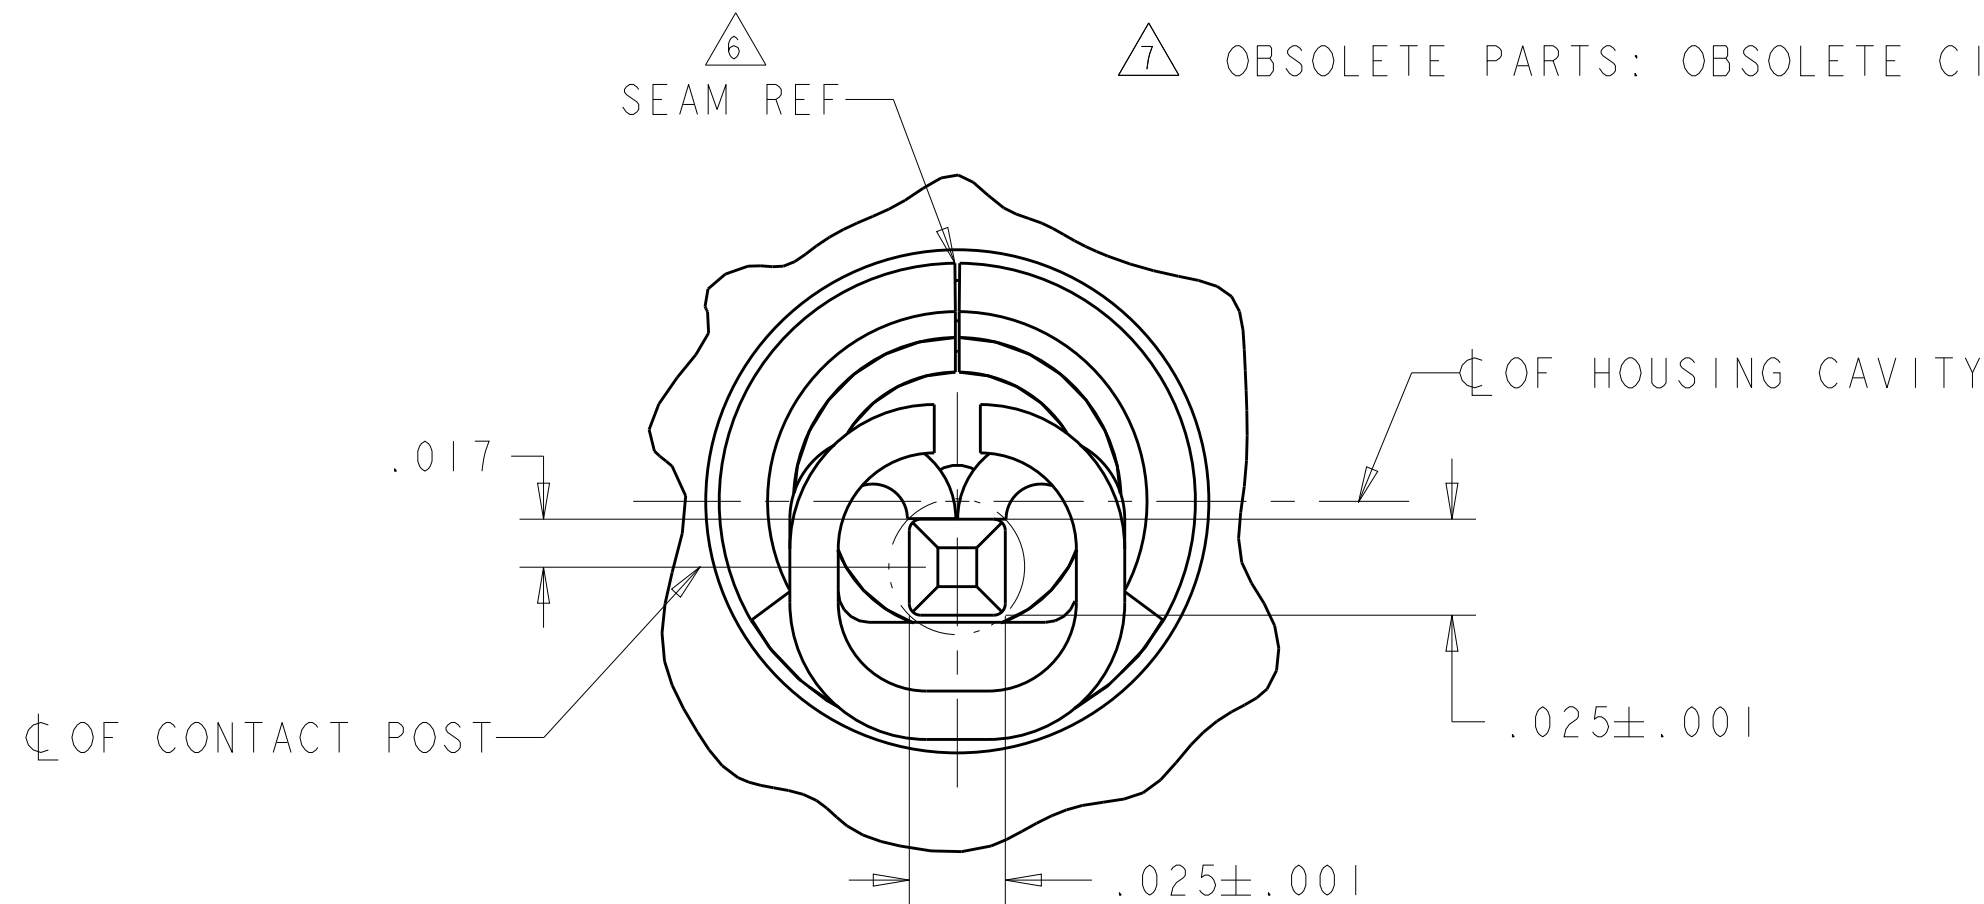

DETAIL V
SCALE 20:1

OBSOLETE		.368	-	YES	3	13	1-5,7-14	1-213825-8
		.220	-	YES	3	14	ALL	1-213825-7
OBSOLETE		.220	-	YES	3	11	1,3,4,6,8-14	1-213825-6
		.220	POSN 9	YES	3	13	1-8,10-14	1-213825-5
		.220	-	YES	3	13	1-5,7-14	1-213825-4
OBSOLETE	-	.557	-	NO	2	12	1,2,4,5,7-14	1-213825-3
		.220	POSN 9	YES	2	13	1-8,10-14	1-213825-2
7 OBSOLETE		.368	-	YES	2	13	1-5,7-14	1-213825-1
		.220	-	YES	2	13	1-5,7-14	1-213825-0
		.220	-	YES	2	11	1,3,4,6,8-14	213825-9
7 OBSOLETE		.220	POSN 9	YES	2	13	1-8,10-14	213825-5
OBSOLETE		.368	-	YES	2	13	1-5,7-14	213825-4
OBSOLETE		.220	-	YES	2	13	1-5,7-14	213825-3
7 OBSOLETE		.220	-	YES	2	11	1,3,4,6,8-14	213825-2
OBSOLETE		.220	-	YES	2	14	ALL	213825-1
STATUS		L	KEYING PLUG	PERIPHERAL SEAL	FINISH	QTY	SELECT LOAD IN POSITIONS	PART NUMBER
CONTACTS								

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.WELDON 23MAY2003	TE Connectivity	
DIMENSIONS: INCHES		CHK S.HEADER 23MAY2003		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.HEADER 23MAY2003	NAME RECEPTACLE ASSEMBLY, POSTED, SERIES 1, REVERSE SEX, CPC	
0 PLC ±.0		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
1 PLC ±.0		APPLICATION SPEC	RESTRICTED TO	
2 PLC ±.0		WEIGHT	A100779C=213825	
3 PLC ±.0, .010		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 2 REV S	
4 PLC ±.0				
ANGLES FINISH				
MATERIAL				

