Features

- Efficiency up to 96%, no need for heatsinks!
- Build-in Diode Protection Circuit
- Low Profie (LxWxH= 11.5 x 8.5 x 17.5mm)
- Wide Input Range: 85-305VAC

Switching **Regulator**

- RoHS compliant
- IEC/EN-60950 Certified

Short Circuit Protection

Description

The R-78W series offers wired 0.5A switching regulators which are ideally suited to offer a stable voltage supply without the need for a PCB for applications like high power LED lighting, battery powered systems, cooling systems, or fans. Due to the high efficiencies of up to 96% there is no need for a heat sink. The compact modules feature fully protected outputs and draw only 1mA under no load conditions.

| Selection Gu | iide | | | | |
|----------------|-------------------------------|----------------------------|---------------------------|---------------------------|--|
| Part Number | Input Voltage Range (V) | Output Voltage (VDC) | Output Current (mA) | Efficiency min. (%) | Max. Capacitive Load ⁽¹⁾ (µF) |
| R-78W3.3-05 | 4.75 - 32 | 3.3 | 500 | 90 | 220 |
| R-78W5.0-05 | 6.5 - 32 | 5.0 | 500 | 93 | 220 |
| R-78W9.0-0.5 | 11 - 32 | 9.0 | 500 | 95 | 220 |
| R-78W12-0.5 | 15 - 32 | 12.0 | 500 | 96 | 220 |
| | Notes: | | | | |

Note1: 6800µF with <1sec start-up time

Specifications (measured at TA= 25°C, full load and after warm-up)

| BASIC CHARACTERISTICS | | | | | | |
|--|---------------------|---------------------|---------|---------|--|--|
| Parameter | Condition | Min. | Тур. | Max. | | |
| Input Voltage Range | | see Selection Guide | | | | |
| Output Current (2) | | 6mA | | 500mA | | |
| Quiescent Current | 0% Load | | 5mA | 7mA | | |
| Switching Frequency | | 280kHz | 330kHz | 380kHz | | |
| Efficiency | see Selection Guide | | | | | |
| Internal Power Dissipation | | | | 0.4W | | |
| Output Ripple and Noise | 20MHz BW limited | | 50mVp-p | 75mVp-p | | |
| Notes: | | | | | | |
| Note2: Operation under no load will not damage the device, however they may not meet all specifications. A minimum load of 6mA is recommended. | | | | | | |

| REGULATIONS | | | | | |
|---|--|---------------------|---|--|--|
| Parameter | Condition | Туре | Value | | |
| Output Voltage Accuracy | | all models | ±2% typ. / ±3% max. | | |
| Line Voltage Regulation | low line to high line, full load | 3.3V, 5V 9V, 12V | ±0.2% typ. / ±0.4% typ. ±0.1% typ. / ±0.2% typ. | | |
| Load Voltage Regulation | 10% to 100% load | 3.3V, 5V 9V, 12V | ±0.4% typ. / ±0.6% typ. ±0.25% typ. / ±0.4% typ. | | |
| Transient Response (3) | 50% - 100% Load, Δlo/Δt 25mA/μs 10% - 100% Load, Δlo/Δt 25mA/μs | all models | \pm 75mV typ. \pm 100mV max. | | |
| Notes: Note3: The R-78W3.3-0.5 requires Vin>5.5V to meet the Dynamic Load Stability Specification. | | | | | |

RECON **DC/DC** Converter

R-78W-05

0.5 AMP SIP3 Single **Output**







Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For futher details, please refer to Application Notes


Refer to Applications Notes


RECOM DC/DC Converter

R-78W-0.5

Series

Specifications (measured at TA= 25°C, full load and after warm-up)

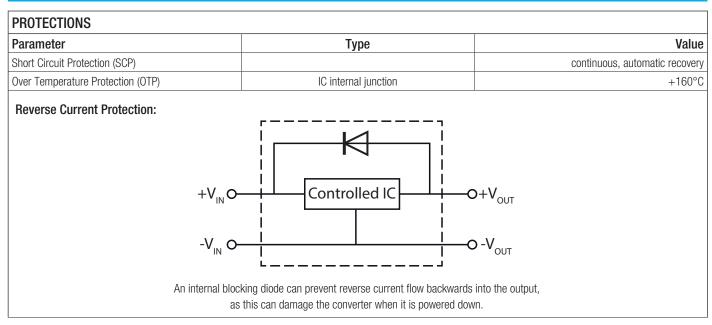

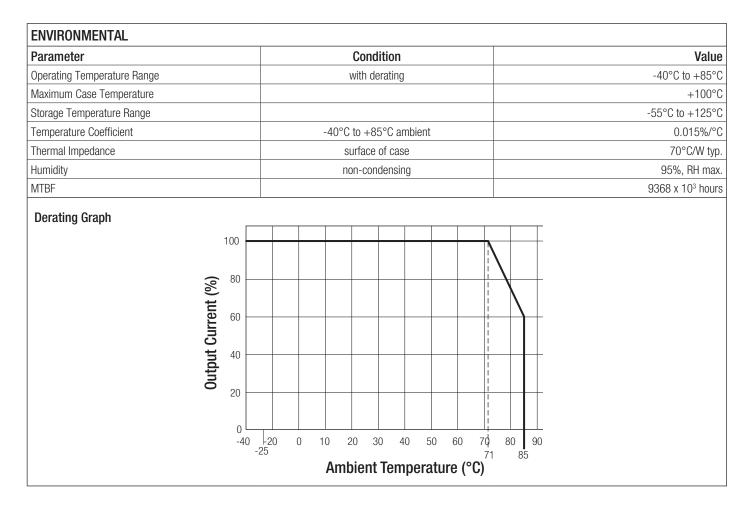


| SAFETY AND CERTIFICATIONS | | | | |
|---------------------------|----------------------|--------------------------|--|--|
| Certificate Type | Report / File Number | Standard | | |
| IEC General Safety | SPCLVD1407030-1 | IEC-60950-1, 2nd Edition | | |
| EN General Safety | SPCLVD1407030-1 | EN-60950-1, 3rd Edition | | |

RECOM DC/DC Converter

R-78W-0.5 Series

Specifications (measured at TA= 25°C, full load and after warm-up)

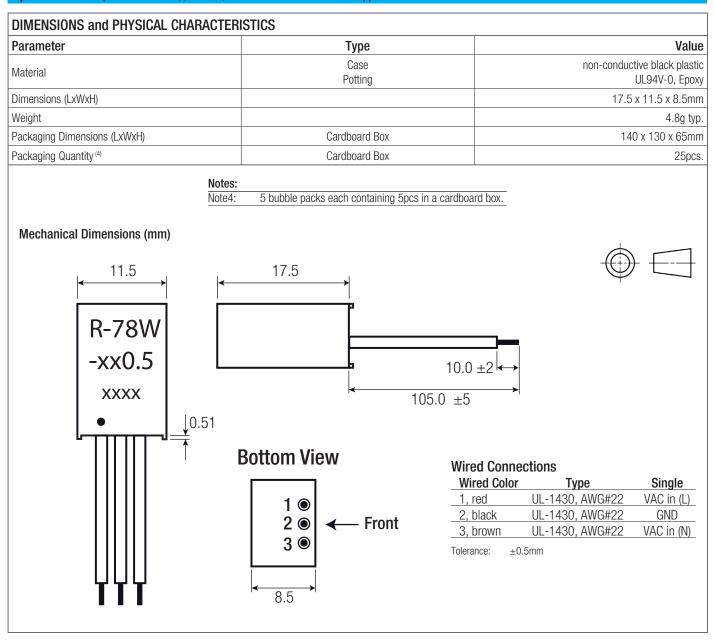

The product information and specifications are subject to change without prior notice. All products are designed for non-safety critical commercial and industrial applications. The buyer agrees to implement safeguards that anticipate the consequences of any failures that might cause harm, loss of life and/or property damage.