

# SAFELOC HRC

## Fuse Holders

SAFELOC



CATALOG SYMBOL: C30FB, C30BSB, C30FBSB, C60FB,  
C60BSB, AND C60FBSB  
FUSE HOLDER  
30 AND 60 AMPS  
FOR USE WITH HRCI-CB FUSES  
SUITABLE FOR BOLTED PANEL MOUNTING OR DIN RAIL  
MOUNTING

### SAFELOC Ratings

For use with HRCI-CB Fuses

Rating	Connection	Catalog Number	Fuse Accommodated
30 Amp	Front	C30FB	CIF06B
	Back	C30BSB	
	Front-Back	C30FBSB	
60 Amp	Front	C60FB	EK-B
	Back	C60BSB	
	Front-Back	C60FBSB	


### Features

- SAFELOC Fuse Holders provide an easy method of protecting a wide range of electrical equipment such as lighting, heating, motor and control equipment circuits.
- Designed to accommodate the compact range of offset blade fuse to CSA C22.2 No. 106, HRCI-CB.
- Incorporated a unique slide/snap action. Carrier which eliminates the need for fuse carrier contacts.
- Carrier provides a positive, stress free fitting of fuse and locks the fuse in position ensuring safe insertion and withdrawal from the base. The resulting direct contact between fuse blades and the plated base contacts provides lower watts loss and increased reliability.
- Base Contacts are fully shrouded to help protect against electric shock.
- Shrouds utilize simple slide/snap action allowing access to the contact terminal screws.
- 35mm DIN-rail mounting.
- Single screw mounting.

# SAFELOC HRC Fuse Holders

SAFELOC

## Dimensional Data

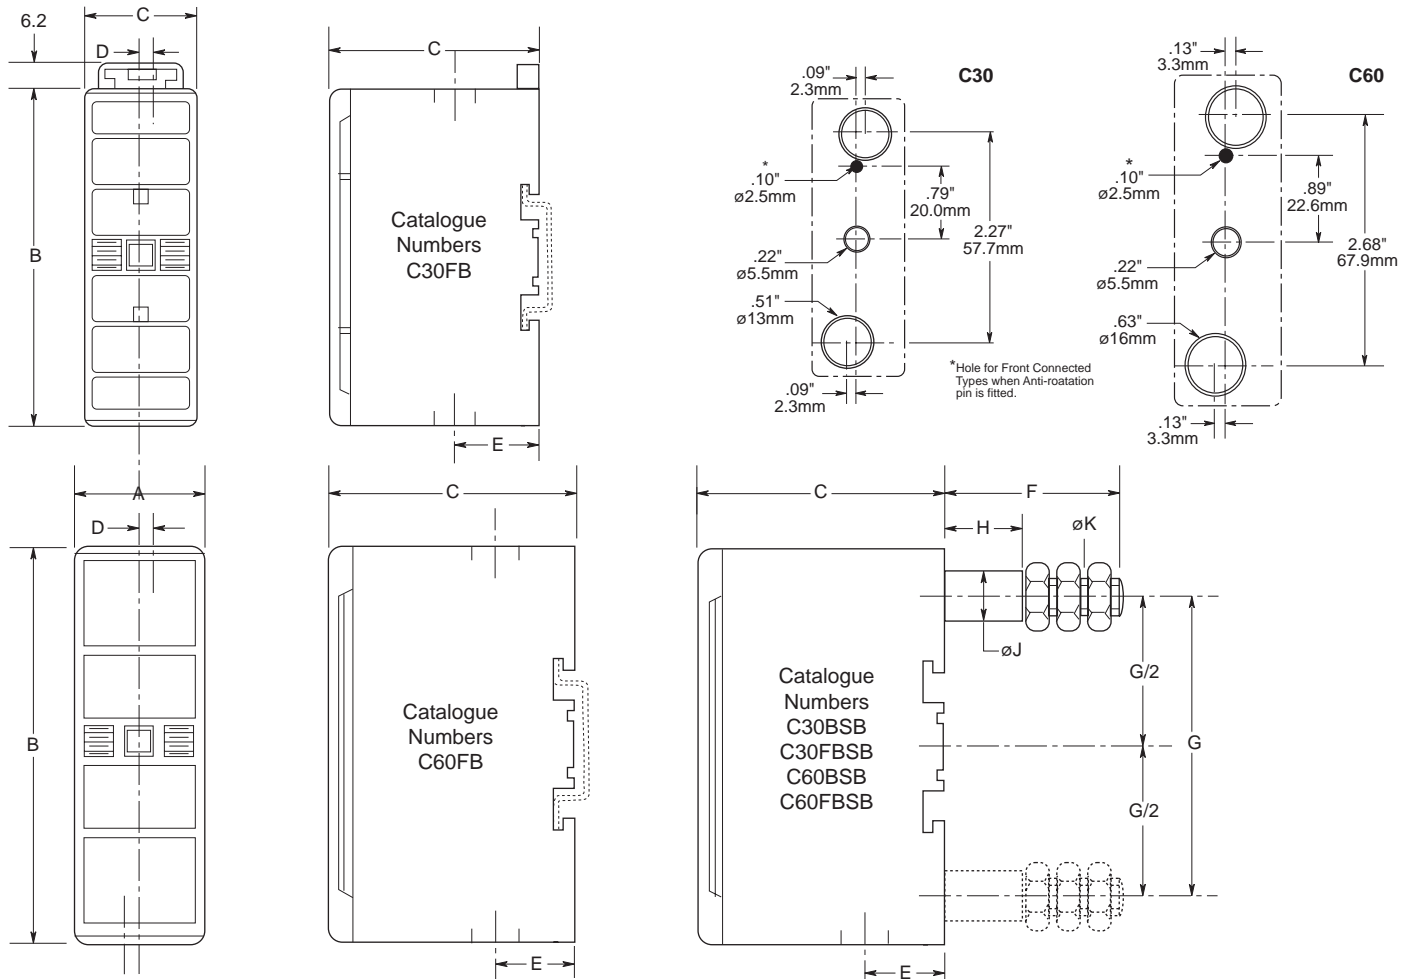

## Dimensions in Inches and (mm)

Rating Amps	Catalog Number	Max. Cable mm <sup>2</sup>	A	B	C	D	E	F	G	H	J	K
30	C30	16	1.0 (25.4)	3.0 (76.2)	1.83 (46.5)	.09 (2.3)	.63 (16.0)	1.54 (39.2)	2.27 (57.7)	.67 (17.0)	.38 (9.7)	M6
60	C60	35	1.15 (29.1)	3.55 (90.0)	2.18 (55.0)	.13 (3.3)	.70 (17.7)	1.54 (39.2)	2.68 (67.9)	.69 (17.5)	.43 (11.0)	M8

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.