
SPECIFICATIONS					
PARAMETERS	VALUES	UNITS			
RATED VOLTAGE	15	Vp-p			
OPERATING VOLTAGE RANGE	1 ~ 30	Vp-p			
RATED CURRENT (MAX)	5	mA			
CAPACITANCE	13,000 ± 30%	pF			
MINIMUM SPL @ 10 CM	92	dBA			
RESONANT FREQUENCY	5,000 ± 500	Hz			
OPERATING TEMPERATURE	-20 ~ +60	°C			
STORAGE TEMPERATURE	-30 ~ +70	°C			
HOUSING MATERIAL	BRASS	-			
TERMINAL MATERIAL	LEAD WIRE	-			
WEIGHT	2	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. 1S PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY							
LTR	DESCRIPTION	DATE	APPROVED				
-	RELEASED FROM ENGINEERING	8/9/2005					
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	9/8/2008	B.R.				

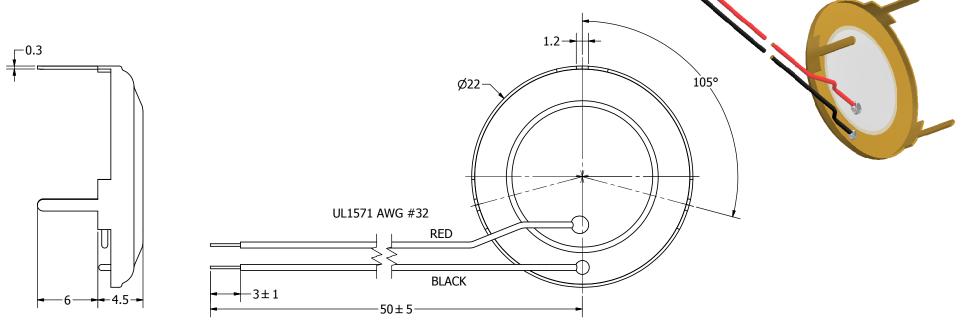

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by
	SIZE	J.A.F.
DIMENSIONS ARE IN MILLIMETERS,	· · · · ·	$\sim$
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	<b>A</b> 3	
AT-2250-T-L	W50-R.idw	4

J.A.F.	8/9/2005	Е	Ξ.P.	8/9/2005	
pul.		AT-225			
	<b>audic</b>	)	Tr	ancduc	

Checked by

Date

AT-2250-T-LW50-R

Transducer (Piezo) | Edition | Sheet | 1/1

Date

Drawn Date

8/9/2005 9/5/2008

Approved by