

## VOICE OVER IP MAGNETICS

### Broadband Transformers

LM00200

- Support 10 Mbps and 100 Mbps VoIP applications
- Compliant with IEEE 802.3 standards
- Designed to meet 350mA balanced DC line current
- 350μH OCL with 8mA bias applied from 0° to 70° C
- Minimum interwinding breakdown voltage of 1500 Vrms

### ELECTRICAL SPECIFICATIONS AT 25° C


| Part Number  | Turns Ratio<br>±3% |            | Primary Inductance<br>μH min | Leakage Inductance<br>μH max | Interwinding Capacitance<br>pF max | DCR<br>Ω max |     |      |     |
|--------------|--------------------|------------|------------------------------|------------------------------|------------------------------------|--------------|-----|------|-----|
|              | TXIN : TXO         | RXIN : RXO |                              |                              |                                    | TXIN         | TXO | RXIN | RXO |
| S558-5500-02 | 1CT : 1CT          | 1CT : 1CT  | 350                          | 0.25                         | 25                                 | 1.0          | 1.0 | 1.0  | 1.0 |
| S558-5500-04 | 1CT : 1CT          | 1CT : 1CT  | 350                          | 0.25                         | 25                                 | 1.0          | 1.0 | 1.0  | 1.0 |
| S558-5500-12 | 1CT : 1CT          | 1CT : 1CT  | 350                          | 0.25                         | 25                                 | 1.0          | 1.0 | 1.0  | 1.0 |
| S558-5500-16 | 1CT : 1CT          | 1CT : 1CT  | 350                          | 0.25                         | 40                                 | 1.0          | 1.4 | 1.0  | 1.4 |

| Part Number  | Insertion Loss<br>dB min | Return Loss<br>dB min |                | Crosstalk<br>dB min |       |       |        | Common to Differential Mode Rejection<br>dB min | Common to Common Mode Rejection<br>dB min |
|--------------|--------------------------|-----------------------|----------------|---------------------|-------|-------|--------|-------------------------------------------------|-------------------------------------------|
|              | 100kHz to 100MHz         | 2MHz to 30MHz         | 60MHz to 80MHz | 1MHz                | 30MHz | 60MHz | 100MHz | 100kHz to 100MHz                                |                                           |
| S558-5500-02 | -1.5                     | -16                   | -10            | -65                 | -60   | -50   | -45    | -45                                             | -45                                       |
| S558-5500-04 | -1.5                     | -16                   | -10            | -65                 | -60   | -50   | -45    | -45                                             | -45                                       |
| S558-5500-12 | -1.5                     | -16                   | -10            | -65                 | -60   | -50   | -45    | -45                                             | -45                                       |
| S558-5500-16 | -1.5                     | -16                   | -10            | -65                 | -60   | -50   | -45    | -45                                             | -45                                       |


## VOICE OVER IP MAGNETICS Broadband Transformers

### SCHEMATIC

S558-5500-02  
S558-5500-04

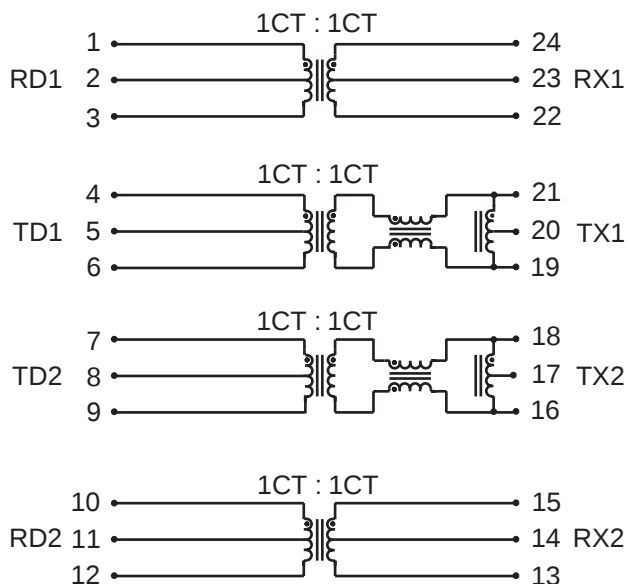

S558-5500-12

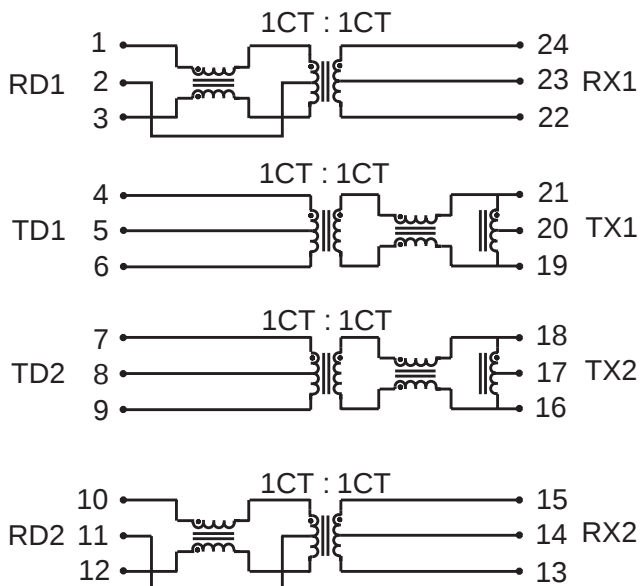

# VOICE OVER IP MAGNETICS


## Broadband Transformers

**bel**

LM00200


### SCHEMATIC

S558-5500-16

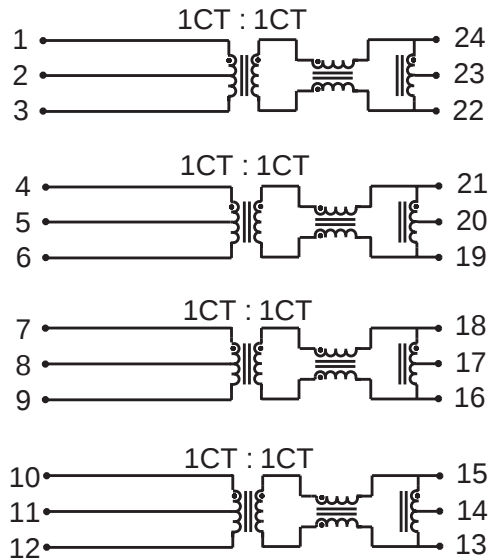

### MECHANICAL

S558-5500-02

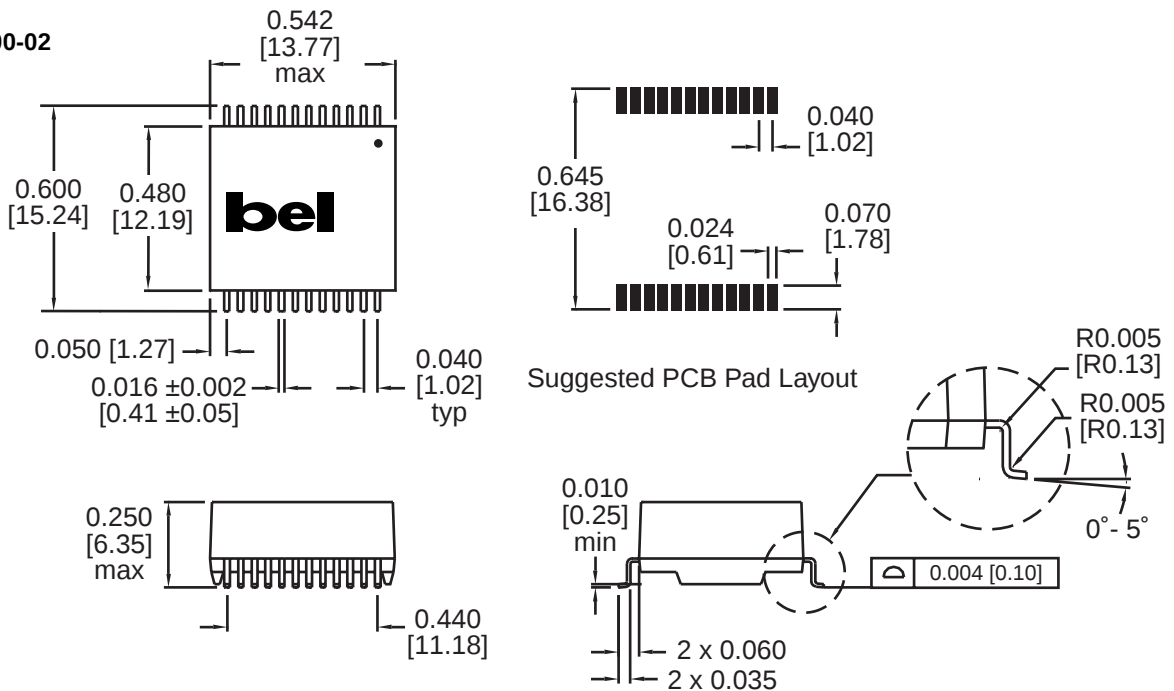


Dimensions are in inches [millimeters].  
Standard dimension tolerance is ±0.005 [0.13] unless otherwise noted.

#### MECHANICAL

S558-5500-04  
S558-5500-12  
S558-5500-16

Suggested PCB Pad Layout

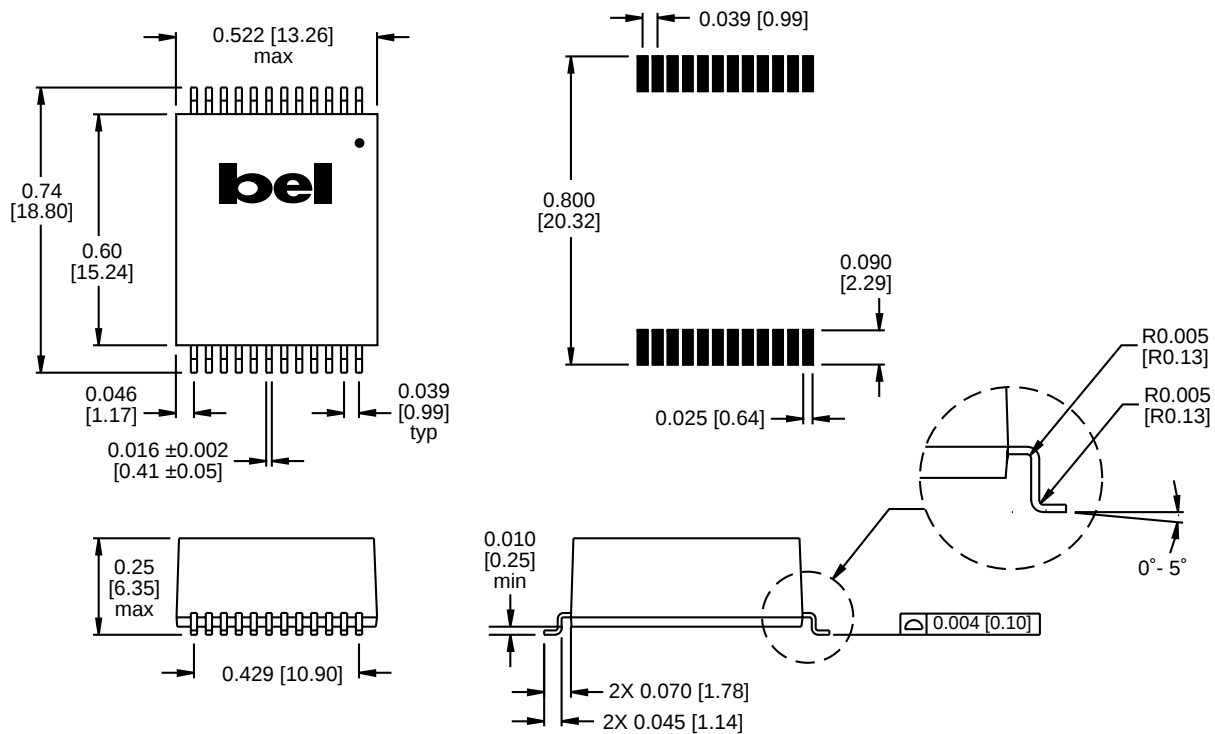

Dimensions are in inches [millimeters].  
Standard dimension tolerance is  $\pm 0.005$  [0.13] unless otherwise noted.

#### CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

#### FAR EAST

**Bel Fuse Ltd.**  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

#### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
www.belfuse.com