

RP115 Series

Compact Single Stage Power Line Filters



3 A to 20 A Chassis Mount Filter

Specifications


Operating Frequency	50/60 Hz
Usable Frequency	DC - 400 Hz
Max. Operating Voltage*	250 V +10%
Ambient Temperature	-25 to 40°C
Climatic Category	25/100/21
Hipot Rating (L-G)	2700 VDC
Terminals (-T)	QD: 0.25 Tabs
Safety Approvals	CSA, UR, EN60939
Typ. Weight, lbs (kg)	0.5 (0.2)

*Available up to 300 VAC. Please contact us to verify specifications.

Part Number/Ordering

RP115	-X (Amps)	-Y (Ycap, nF)	-T
	3	0	QD
	6	0.47	
	10	1	
	16	2.2	
	20	4.7	
		10	

Note: Use any combination of -Y with any -X (Amps) rating
e.g. RP115-16-2.2-QD (16 Amps with 2.2nF Ycap)

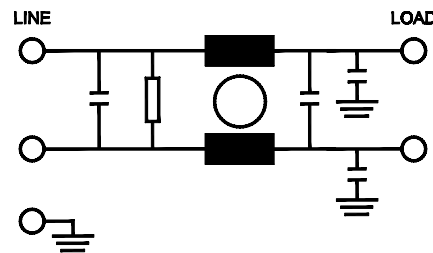

Mechanical Dimensions

3/6 Amp



10/16/20 Amp



Specifications are subject to change. Consult factory to verify specifications.

For more information on our filter products call us at: (800) 527-4362 or (714) 289-0055
LCR, Radius Power, and Filter Concepts are now part of Astrodyne TDI

RP115 Series

Compact Single Stage Power Line Filters



3 A to 20 A Chassis Mount Filter

Typical Insertion Loss, dB (50/50 Ohm)

Freq (MHz)	0.15	0.5	1.0	10	30
3 Amp					
CM(dB)	28	36	44	58	64
DM(dB)	30	48	60	55	55
6 Amp					
CM(dB)	20	32	28	55	55
DM(dB)	20	32	40	58	70
10 Amp					
CM(dB)	34	44	54	50	44
DM(dB)	30	42	55	70	70
16 Amp					
CM(dB)	16	36	44	58	64
DM(dB)	28	40	55	70	70
20 Amp					
CM(dB)	20	28	34	55	60
DM(dB)	26	38	52	65	65

Leakage Current

Y-cap, nF	mA, 120 V/60 Hz	mA, 250 V/60 Hz
0	0.0	0.0
0.47	0.04	0.08
1	0.09	0.18
2.2	0.2	0.4
4.7	0.4	0.8
10	0.9	1.8

Specifications are subject to change. Consult factory to verify specifications.

For more information on our filter products call us at: (800) 527-4362 or (714) 289-0055
LCR, Radius Power, and Filter Concepts are now part of Astrodyne TDI