


# XDSL SPLITTER FILTER MODULE

BX8841NL - SmartER series - Extended Temperature




- ⌚ POTS CO splitter for ETSI-B 600Ω ADSL to VDSL2 applications
- ⌚ POTS CO splitter for China YD/T 1187-2006 ADSL2+ 600Ω
- ⌚ LPF matched to 600Ω impedance
- ⌚ Metering Pulse 12 kHz to 16 kHz
- ⌚ Part of a standard series which has footprint compatibility
- ⌚ Compliant with Broadband Forum TR-127 standard for VDSL2 applications
- ⌚ Patented technology US7598837, US7598839, CN1667763, EP1644943, TWI316724, CA2531599

| Electrical Specifications @ 25°C Operational Temperature -40°C to +85°C |                                       |                          |
|-------------------------------------------------------------------------|---------------------------------------|--------------------------|
| PARAMETER                                                               | FREQUENCY                             |                          |
| POTS Impedance                                                          | 200 Hz to 4 kHz                       | 600 Ω                    |
| POTS Insertion Loss                                                     | @ 1 kHz                               | 0.3 dB MAX               |
| POTS Insertion Loss Distortion                                          | 200 Hz to 4 kHz                       | 0.3 dB MAX               |
| POTS Return Loss                                                        | 300 Hz to 500 Hz / 2.0 kHz to 3.4 kHz | 14 dB MIN                |
|                                                                         | 500 Hz to 2.0 kHz                     | 18 dB MIN                |
| Metering Pulse insertion loss                                           | 12KHz and 16KHz                       | 3dB MAX                  |
| Group Delay                                                             | 200 Hz to 3.4 kHz                     | 150uS MAX (Typical 65uS) |
| Longitudinal Balance                                                    | 50 Hz to 600 Hz / 3.4 kHz to 30 kHz   | 40 dB MIN                |
|                                                                         | 600 Hz to 3.4 kHz / 30 kHz to 1.1 MHz | 46 dB MIN                |
|                                                                         | 1.1 MHz to 30 MHz                     | 30 dB MIN                |
| xDSL Isolation                                                          | 30 kHz to 30 MHz                      | 55 dB MIN                |
| xDSL Insertion Loss                                                     | 32 kHz to 50 kHz                      | 3.0 dB MAX               |
|                                                                         | 50 kHz to 30 MHz                      | 1.0 dB MAX               |
| Intermodulation Distortion Attenuation                                  | Second order / Third order            | 57 dB MIN / 60 dB MIN    |
| Tip to Ring Capacitance                                                 |                                       | 20 nF MIN 115 nF MAX     |
| Tip to Ring Insulation Resistance                                       | (measured with 250V DC)               | 5 MΩ MIN                 |
| DC Current                                                              |                                       | 100 mA MAX               |
| Total DC Resistance                                                     |                                       | 25 Ω MAX                 |



## Mechanical

### BX8841NL

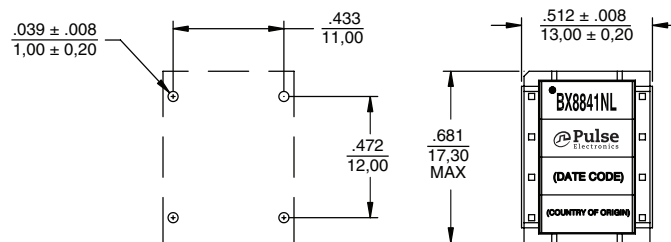

SUGGESTED BOARD LAYOUT

Weight ..... 5.5 grams  
 Tray ..... 80/tray  
 Dimensions: Inches  
 mm  
 Unless otherwise specified, all  
 tolerances are ± .010  
 0.25

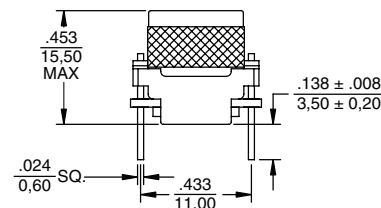


# XDSL SPLITTER FILTER MODULE

BX8841NL - SmartER series - Extended Temperature



## Schematic

**BX8841NL**

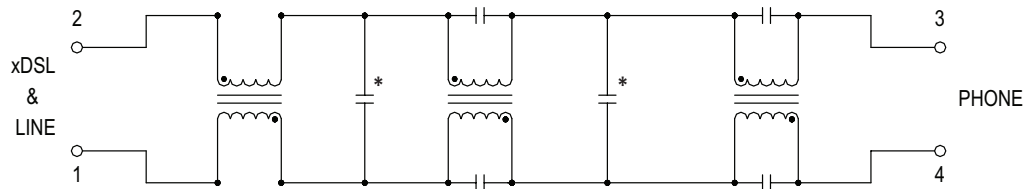

\* These capacitors are 500Vdc rated

## For More Information

### Pulse Worldwide Headquarters

12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0  
Fax: 49 7032 7806 135

### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Road  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.

Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.