



DIMENSIONS

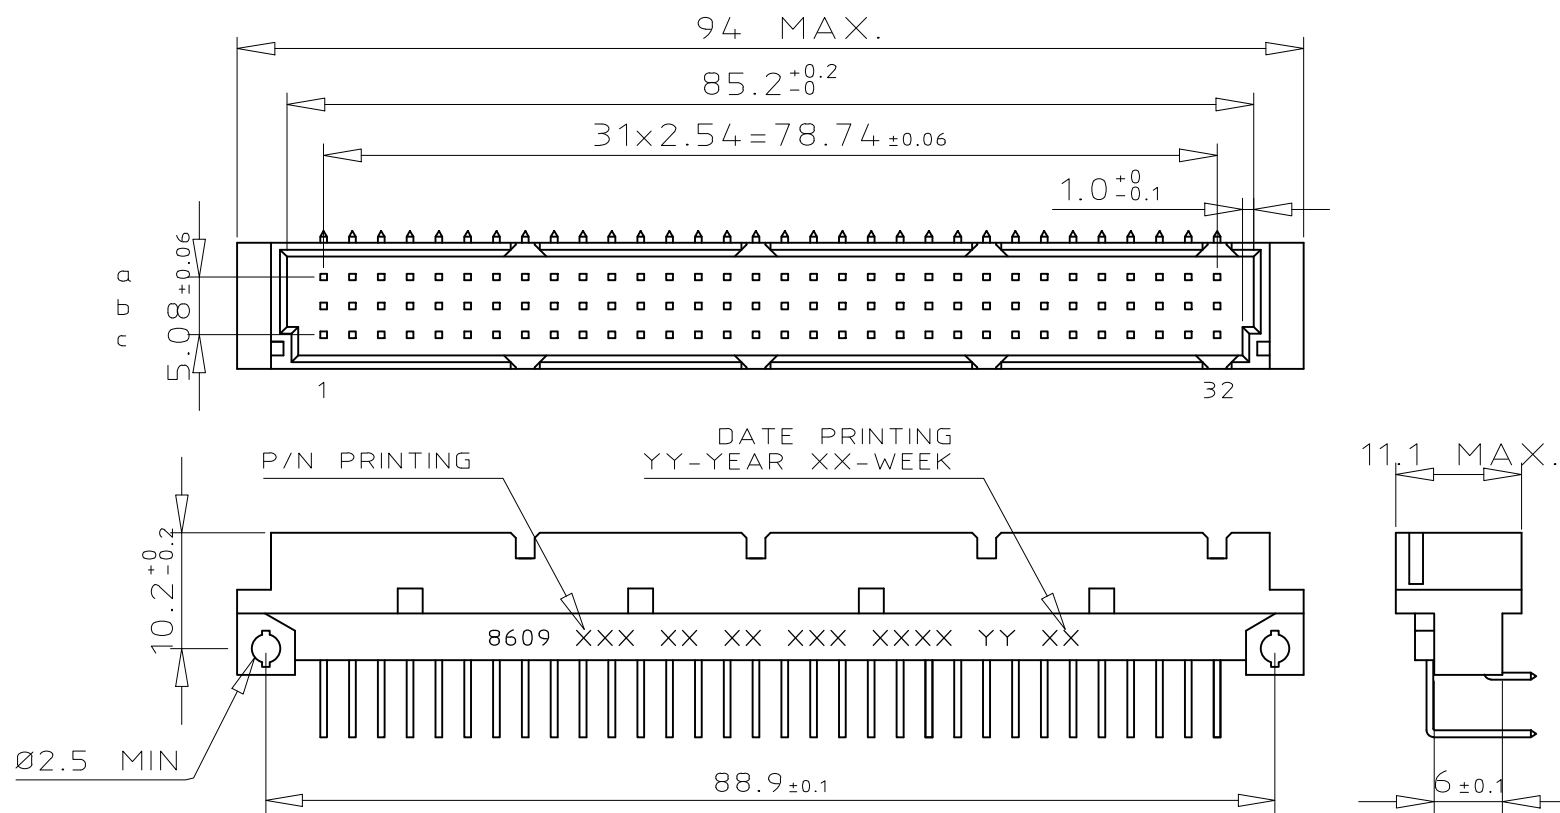

PCB LAYOUT

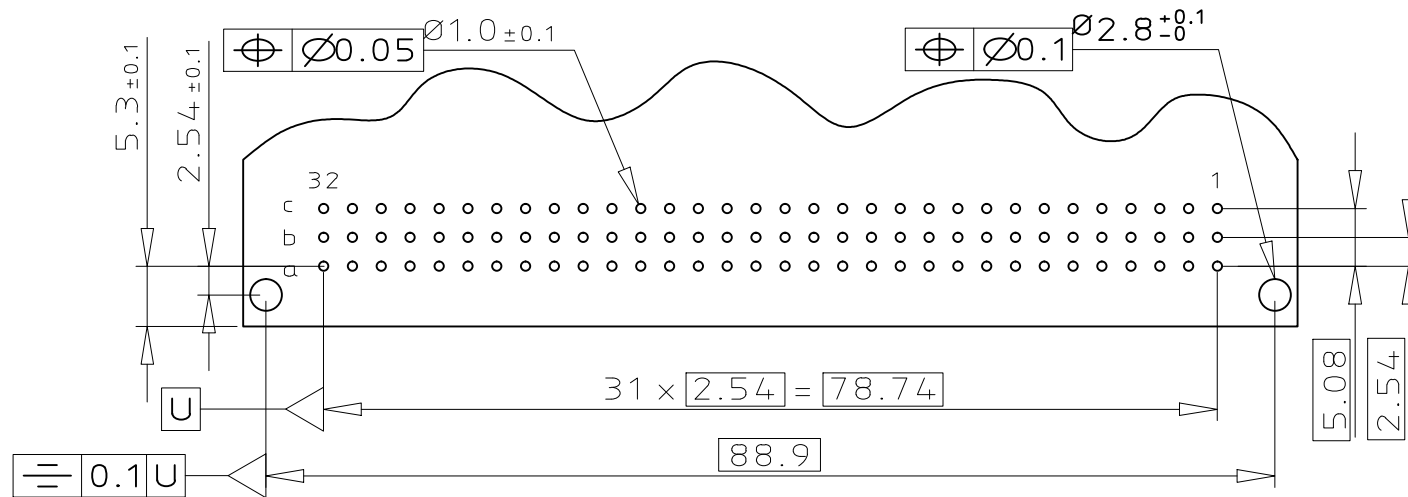

CONTACT ARRANGEMENT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	✓	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	✓	
b																																
c	✓	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	✓	

×

 STANDARD CONTACT

EMPTY CAVITY

✓

 FMLB CONTACT


#

 LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

TERMINATION

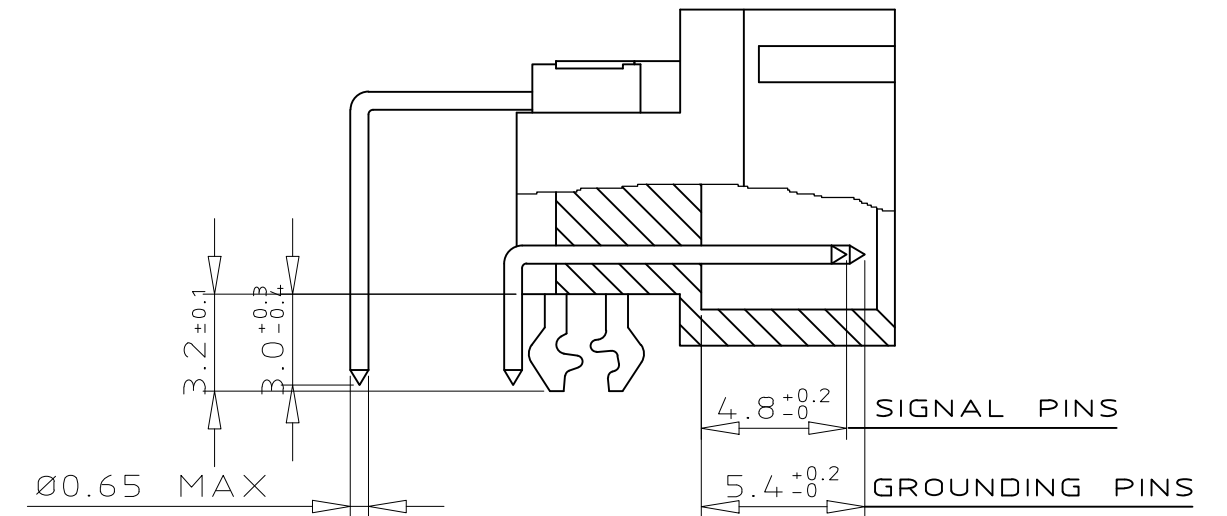

ORDERING INFORMATION

SERIES		8609	4	64	7	1	13	7	5	5	PALF
ROWS FITTED WITH CONTACTS											
ROW a - c		.4		64							
NO. OF CONTACTS											
TYPE OF INSULATOR											
3 ROW MALE INSULATOR		.7									
METHOD OF MOUNTING											
STANDARD MOUNTING - STYLE C		.1									
TERMINATION											
ANGLED SPILL		.13									
OPTIONS											
NO OPTION		.7									
WITH HARPOONS		H									
PERFORMANCE CLASS											
DIN 41612 CLASS 3		.4									
DIN 41612 CLASS 2		.5									
DIN 41612 CLASS 1		.6									
AS PER MIL C 55302 / JSS 50808		.8									
PITCH PER ROW											
2.54mm		.5									
LEAD FREE VERSION SPL CONTACTS LOADING & LASER PRINTING PALF											

[illegible]