
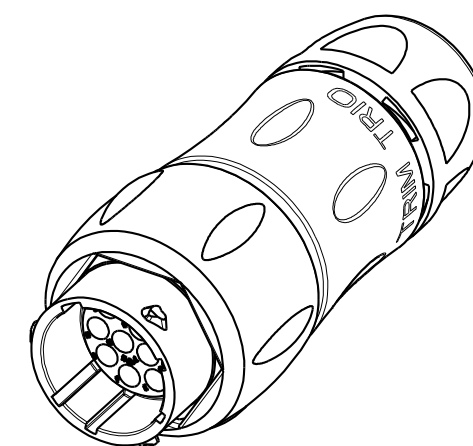


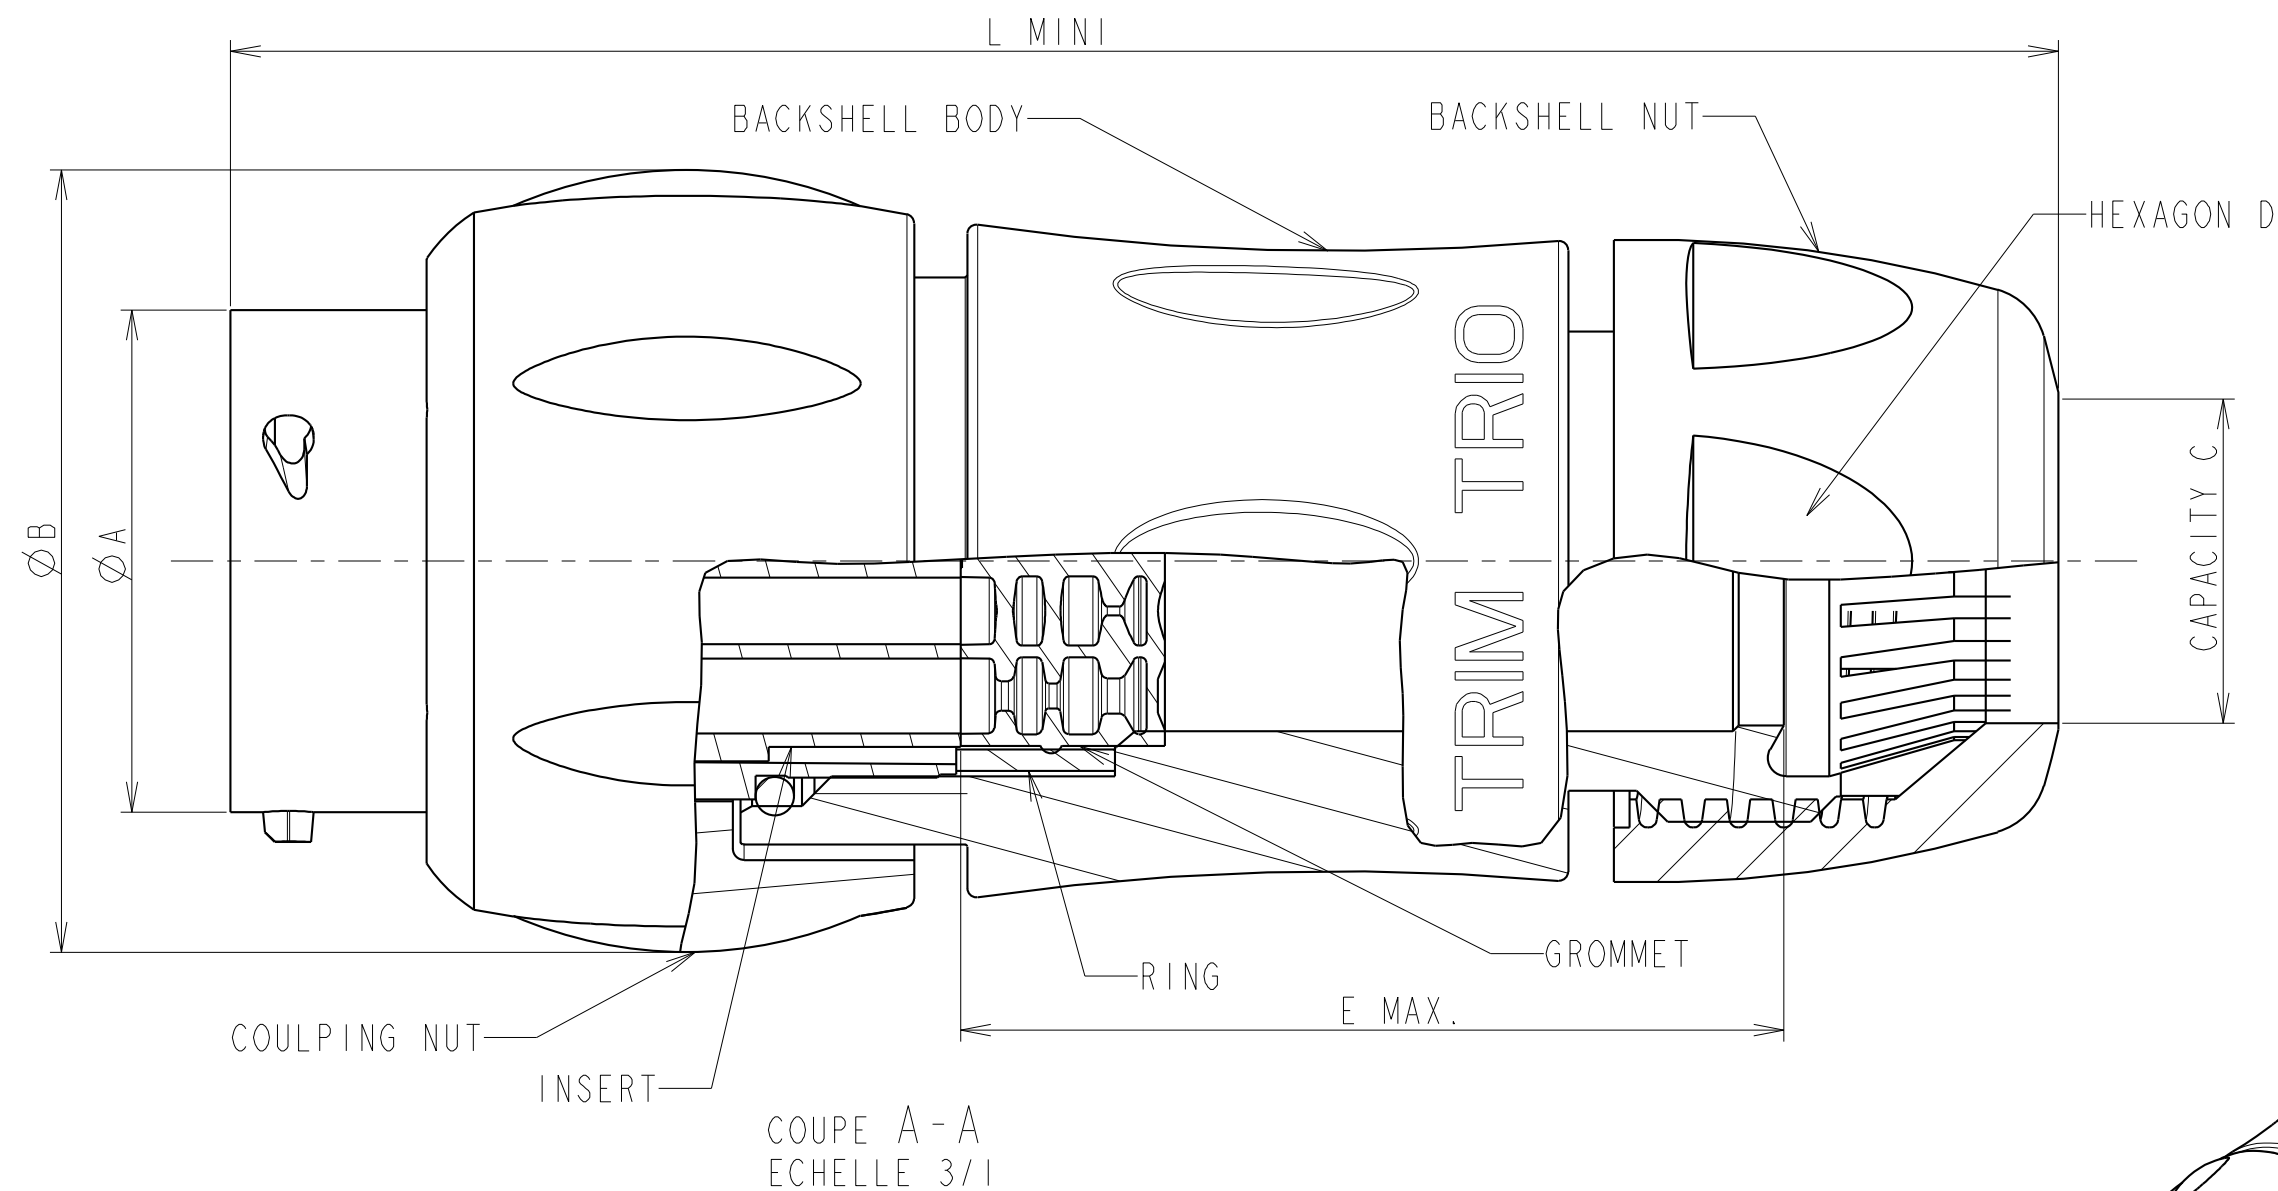

MATERIAL :


Shell:Polyamid UL94 V-0
Insert:Polyamid UL94 V-0
Seal gasket : Sealing IP68/69K : Silicone
O'ring:nitril
Backshell body :Polyamid UL94 V-0
Backshell nut:Polyamid UL94 V-0
Grommet : Silicone

PERFORMANCE CHARACTERISTICS :

Operating temperature:-40°C up to 105°C
Insulation resistance:5000 MΩmin
Test potential:2000 Vrms for #16 layout and 1500Vrms for #20 layout
Corrosion salt spray:500 hours
Durability:250 matings and unmatings
Sealing in mated conditions:
-IP68 1 bar during 1 week : immersion under 10 m of water.
(IEC 60529)
-IP69K : exposure to high pressure water of cleaning
equipement(DIN 40050)


NOTES :

- 1-Receptacle, backshell and the reducing seal are delivered as a kit
The backshell already includes the standard seal.
- 2-Contact to be ordered separately :refer to TRIM TRIO catalog
- 3-Colored ring to be orderd separately refer to customer drawing
C006-UTSI-A
- 4-developed Grommet arrangements : refer to C042-UTSI-A

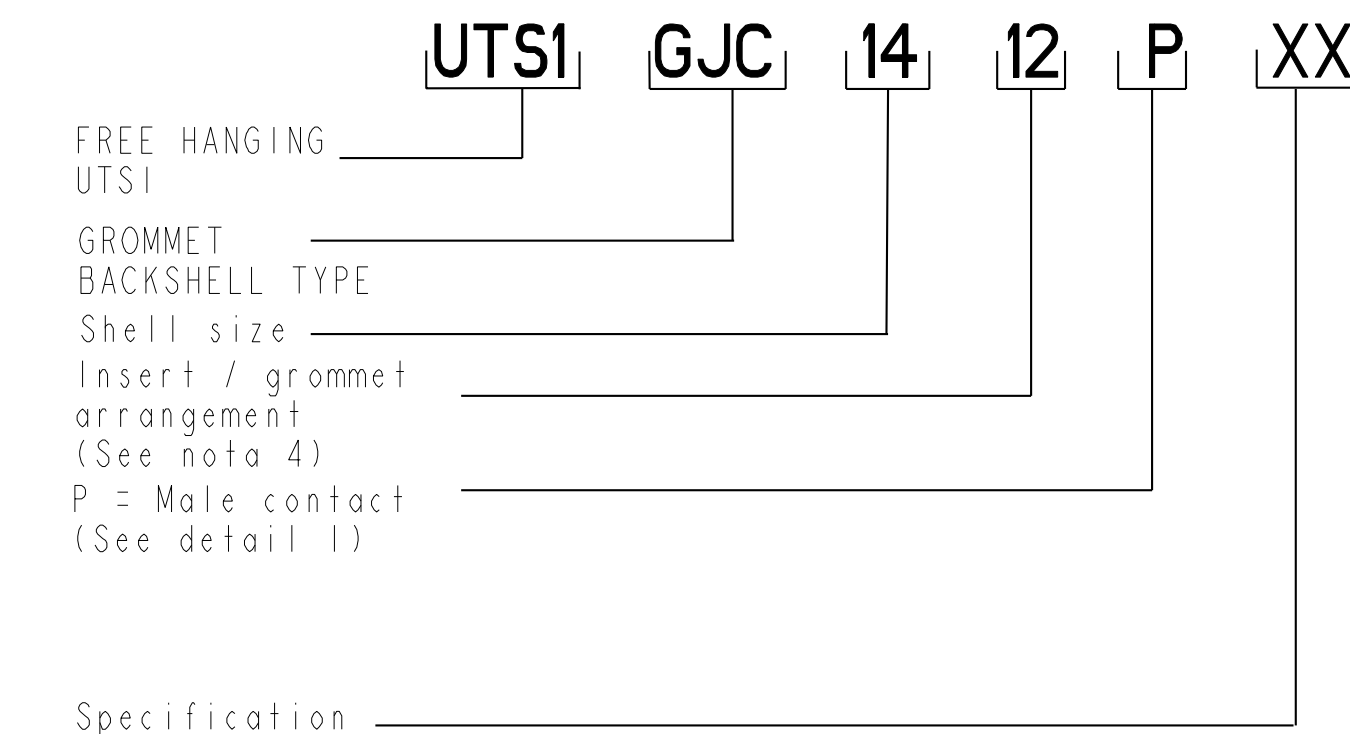


SHELL SIZE	LAYOUT	ØA±0.15	B±0.15	L MINI.	HEXAGON D	CAPACITY C		E MAX
						STANDARD SEAL	REDUCING SEAL	
14	SEE NOTE 4	22.20	34.60	80.5	34.90	7 / 14	5 / 12	37.6
12	SEE NOTE 4	19.00	29.70	74.50	31.80	5 / 12	3 / 9	33.5
10	SEE NOTE 4	14.90	26.20	70.75	27.00	2.5 / 8	1.5 / 5	30

MALE CONNECTOR
(detail 1)

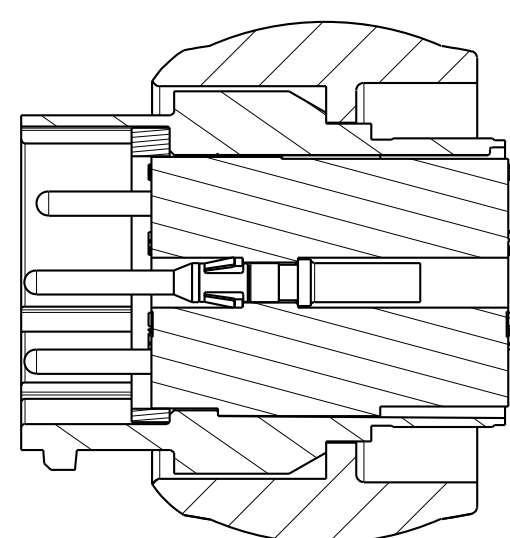

COLOR RING
(see nota 3)

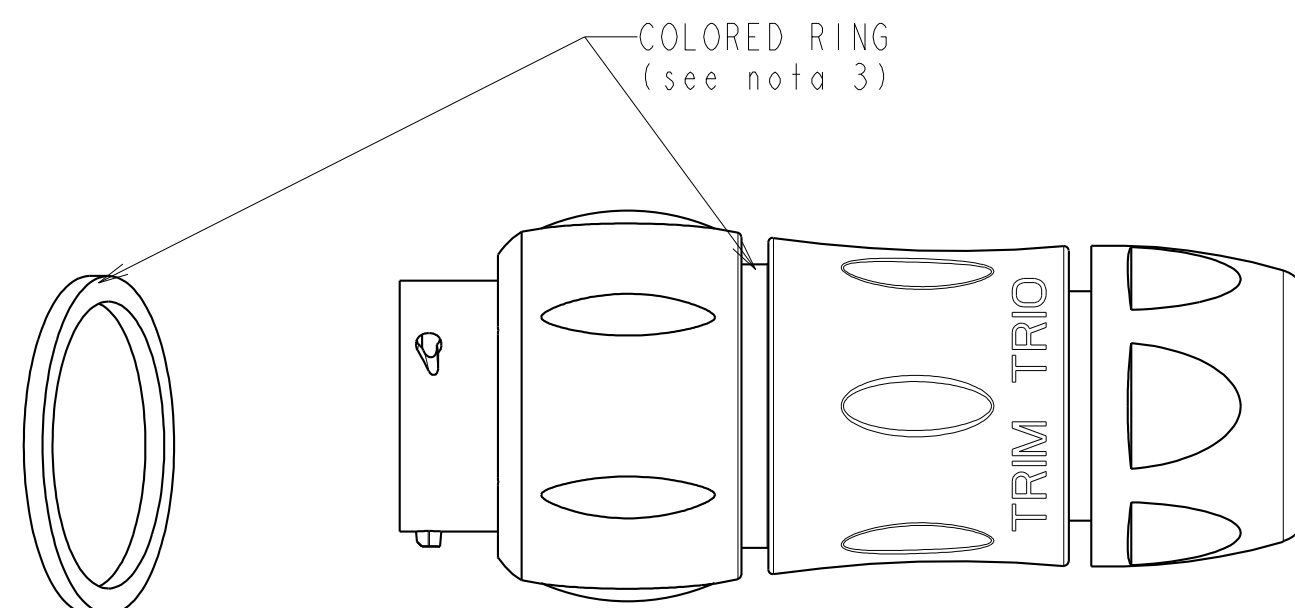

CUSTOMER DRAWING

q	12/02/08	--	New drawing	--
ISS	DATE	Latest modification - by: RAGaine M.		MOD N°
Designed by: RAGaine M.		Date: 31/05/07	CUSTOMER DRAWING	
TITLE		FREE HANGING WITH GROMMET UTS CONNECTOR		
Scale 2/1		General linear Tolerances: ±0.2	NPRDS / PROJECT UTSI	
		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT A2	SOURIAU DRG N° C049-UTSI-A			SHEET
NOT EXPORT CONTROLLED				