

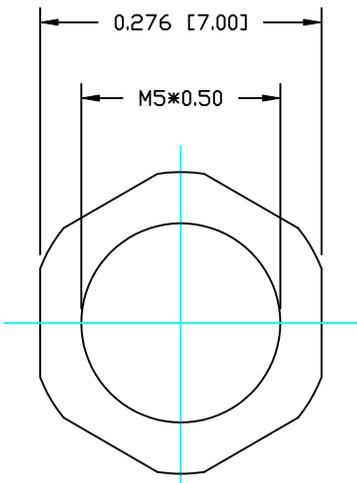


**DESCRIPTION: M5 MALE - PANEL MOUNT (REAR) - SODER CUP - 4 POSITION**

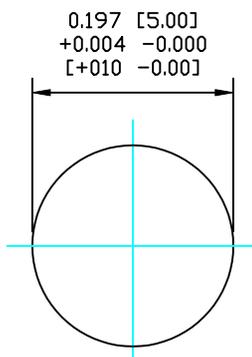




NUT

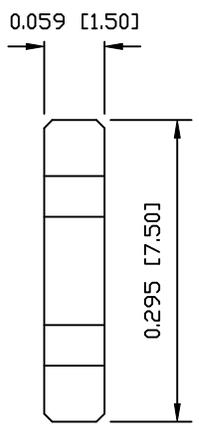

RECOMMENDED  
PANEL CUTOUT

**NOTE:**

|                        |  |
|------------------------|--|
| <b>MATERIAL</b>        |  |
| HOUSING:               | PBT UL94V-0, BLACK                                     |
| CONTACT:               | BRASS  |
| NUT:                   | BRASS  |
| SHELL:                 | BRASS  |
| O-RING:                | NBR, BLACK   |
| <b>FINISH</b>          |  |
| CONTACT:               | GOLD FLASH (0.8-1.0) $\mu$ m<br>OVER 50 $\mu$ m NICKEL |
| NUT:                   | NICKEL PLATED  |
| SHELL:                 | NICKEL PLATED  |
| <b>ELECTRICAL</b>      |  |
| RATED CURRENT:         | 1A   |
| RATED VOLTAGE:         | 60V  |
| WATER PROOF:           | IP67   |
| <b>ENVIRONMENT</b>     |  |
| OPERATION TEMPERATURE: | -40°C TO +85°C   |
| WIRE GAUGE:            | 26-28 AWG  |

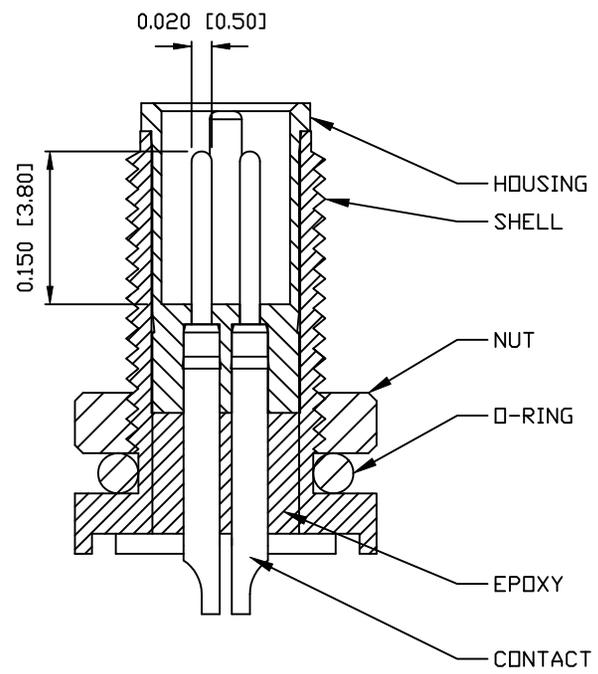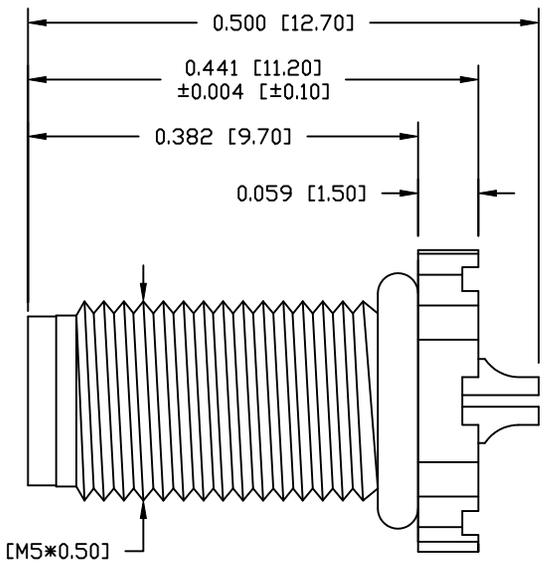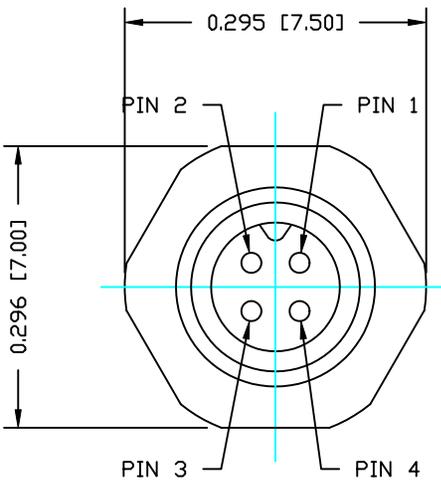

**RoHS COMPLIANT**

**DO NOT SCALE FROM DRAWING**



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

|                           |                          |
|---------------------------|--------------------------|
| <b>DRAWN:</b><br>C. SMITH | <b>DATE:</b><br>12-05-14 |
| <b>CHECKED:</b>           | <b>DATE:</b>             |

**NorComp**

|                                   |                   |                |                 |
|-----------------------------------|-------------------|----------------|-----------------|
| <b>SCALE:</b><br>NTS              | <b>SHEET</b><br>1 | <b>OF</b><br>1 | <b>REV</b><br>0 |
| <b>DWG NO.</b><br>851-004-103R001 |                   |                |                 |