


NOTE 1 Do not apply any excessive stress to the cable assembly position.  
2 We indicate the length of the harness on the last of product name. 'L' part.

Part No.	Cable color
~068*1~	GRAY
~068*2~	BLACK
~068*3~	WHITE

Tolerance for [ L ]	
Length L [mm]	Tolerance [mm]
$35 \leq L \leq 200$	$\pm 4$
$200 < L \leq 500$	$\pm 8$
$500 < L \leq 1000$	$\pm 12$
$1000 < L$	$\pm 1.5\%$


3. Connector rotation angle is optional.  
4. Specifications are subject to change without notice.

【 DIMENSIONS OF CONNECTOR 】

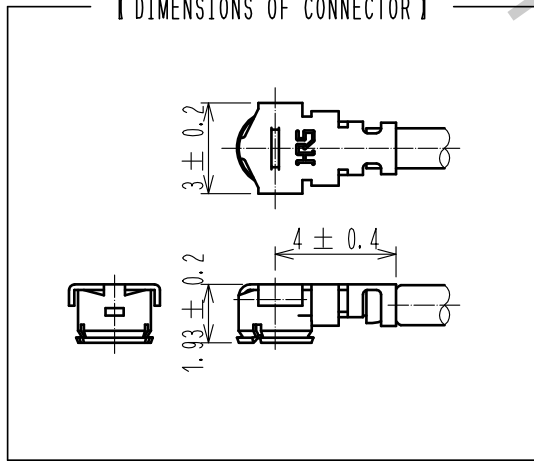

【 PRECAUTIONS FOR HANDLING 】

- ◆ Connector insertion and extraction
  - a. Connector shall be extracted vertically by specialised extraction JIG.  
Part No.: U.FL-LP-N-2 (CL Code: CL331-0494-5)  
Never hold the cable when extracting the cable because it damages the connector.
  - b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.
- ◆ Allowable loads on the cable after the connectors are mated.  
The figures below show the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable.

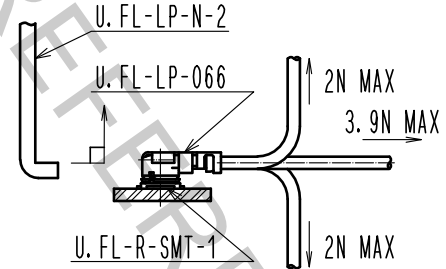

2	U.FL-LP-066	CL331-0452-5-00						
1	HRM-200-066JBN(40)	CL323-0793-1-40		3	1.13 Dia. coaxial cable			
NO.	PART NO.	CODE NO.		NO.	PART NO.			
UNITS mm		SCALE FREE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED		・NK. NINOMIYA	16.11.08	DRAWING No. EDC-373613-00-00		
		CHECKED		・NK. NINOMIYA	16.11.08	PART No. HRMJ-U.FL-068*-A-LRS		
		DESIGNED		・KS. TAKAHASHI	16.11.08	CODE No. CL321-3752-8-07		
		DRAWN		・KS. TAKAHASHI	16.11.08	1/1		