



0910 ASL 409




AS-Interface Module with 4-Digital Inputs

4 IN

AS-Interface flat cable module with 4 digital inputs to connect standard sensors, combined M12 socket, infrared interface for the addressing.

- Version 2.1 -

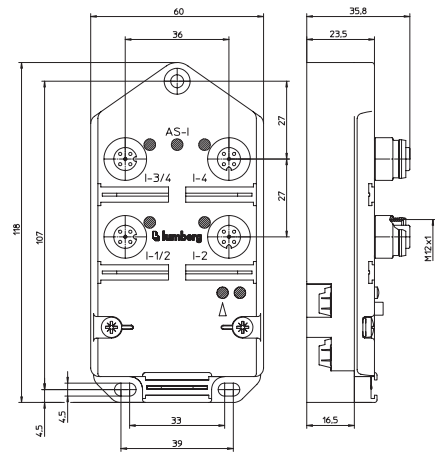

Bit Assignment

Bit	-	-	-	-	3	2	1	0
					I-4	I-3/4	I-2	I-1/2
	M12 Input							
Byte 0	-	-	-	-	I-4	I-3/4	I-2	I-1/2

Diagnostic Indication

LED	Indication	Condition
I-1..4	yellow	channel status
U-AS-i	green	AS-Interface power supply active
	red	communication error
FID	red flashing	periphery error 9sensor/actuator short circuit

Pin Assignments

Input 1 M12	Input 2 M12	Input 3 M12	Input 4 M12
<p>1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = earth</p>	<p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = earth</p>	<p>1 = +24 V 2 = IN 4 3 = GND (0 V) 4 = IN 3 5 = earth</p>	<p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 3 5 = earth</p>

The connection to earth for the inputs is implemented via the earthing contacts at the fastening holes.



Be Certain with Belden

AS-Interface Module with 4-Digital Inputs

0910 ASL 409

Technical Data

Environmental

Degree of protection	IP 67
Operating temperature range	-25°C (-13°F) to +80°C (+176°F)
Weight	200 g
Housing material	PUR

Bus system

AS-Interface profile	S 0.A.E
I/O configuration	0 hex
ID code	A hex
ID2 code (extended ID-code)	E hex
Support A/B addressing	yes

Electronics power supply

Rated voltage	AS-Interface net
Voltage range	26.5–31.6 V DC
Power consumption	max. 250 mA
Reverse polarity protection	yes
Indication	LED green

Input power supply

Voltage range (AS-Interface net)	17–30 V
Total current of all sensors	max. 200 mA
Short circuit-proof	yes

Inputs

Rated input voltage	24 V DC
Signal state "1"	Us > 11 V / Is > 6 mA
Signal state "0"	Is < 2 mA
Input current at	15 mA
Input circuit	p-switching
Number of digital channels	4
Channel status indicator	LED yellow per channel

Diagnostic

Indication	LED red
------------	---------

Included in delivery / Accessories

Dust covers M12	2 pieces
Attachable label	10 pieces

Note

The input channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor to input socket 1 or 3 a further sensor must not be plugged to input socket 2 or 4 respectively due to the Y wiring of the inputs.

Part Number

0910 ASL 409



The application of these products in harsh environments should always be checked before use. Specifications subject to alteration.