


図面番号 (DRAWING NO.)
SJ031660

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閱 APPD.	承認 APPD.
2	9.Feb.1999	43609	REVISED COLOR	H.SAKURADA	K.HASEBE	T.KUME	Y.ICHIYAMA
3	16.Jan.2004	054028	DELETE DIMENSION	H.SAKURADA	K.HASEBE	M.WATANABE	A.Ohno

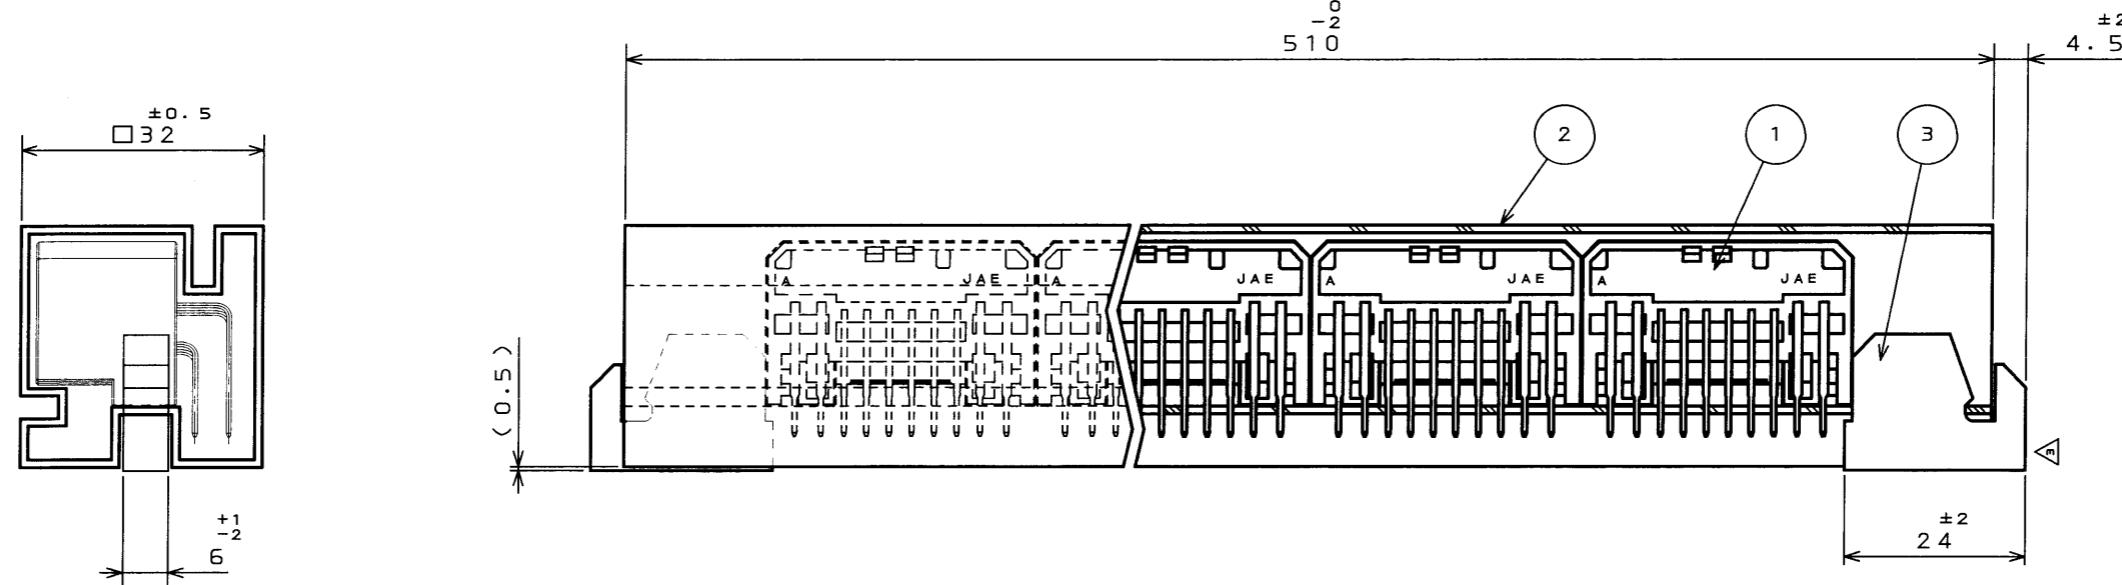

NOTE 1. WARP SHOULD BE 1.5 mm MAX. IN EACH DIRECTION WITH
REFERENCE TO OVER-ALL LENGTH.
2. “-C13” MEANS 13 PCS OF MX5-A-20P-L-B (DWG. NO. SJ031666)
ARE INSTALLED IN STICK CARRIER.
3. CONNECTOR SHOULD BE MOVED SMOOTHLY IN THE STATE OF
STICK CARRIER BEING LEANED AT AN ANGLE OF 35°.
1. 反りは全長に対し各方向共1.5mm以下とする。
2. “-C13”は、MX5-A-20P-L-B (SJ031666)が
スティックキャリアに13個収納されることを表す。
△ 3. ケースを35°傾けた状態でコネクタがスムーズに滑ること。

3	STOPPER	2/13	PVC		COLOR:BLUE
2	STICK CARRIER	1/13	PVC (ANTI-CHARGED MATERIAL)		t=1, MISTY WHITE
1	MX5-A-20P-L-B	1	—	—	COLOR:BLACK
符 号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION)	第1版 (ORIGINAL DATE) 5.Feb.1997		1:1 JAE	日本航空電子工業株式会社 Reference Only ELECTRONICS INDUSTRY, LTD.
	製図 DR.			
一般公差 (GENERAL TOLERANCE)	担当 CHK.	M.KUROIWA		
寸法 (DIMENSION)	査閱 APPD.	A.SAKAI		
角度 (ANGLES)	承認 APPD.	K.TAKEGAWA		
± ± ± ± ±	± ± ± ± ±		重さ (WEIGHT)	
			SJ031660	版数 (REV.) 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[MX5-A-20P-L-B-C13](#)