

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company


Heyco® Snub Bushings

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)
Mounting Hole Diameter Range: .375" (9,5 mm) to .875" (22,2 mm)

| MOUNTING HOLE DIAMETER | | APPROXIMATE CABLE DIAMETER* ACCOMMODATED | | PART NO. Black | DESCRIPTION | PART DIMENSIONS | | | |
|------------------------|------|--|------|-------------------|-------------|--------------------|------|---------------------|------|
| in. | mm. | in. | mm. | | | A Head Diameter | | B Overall Height | |
| .375 | 9,5 | 1/8 | 3,2 | 2034 | K 375-125 | .46 | 11,7 | .42 | 10,7 |
| .437 | 11,1 | 3/16 | 4,8 | 2047 | K 437-187 | .47 | 11,9 | .44 | 11,2 |
| .500 | 12,7 | 1/4 | 6,4 | 2057 | K 500-250 | .56 | 14,2 | | |
| .625 | 15,9 | 3/8 | 9,5 | 2068 | K 625-375 | .73 | 18,5 | | |
| .750 | 19,1 | 1/2 | 12,7 | 2088 | K 750-500 | .91 | 23,0 | | |
| .875 | 22,2 | 5/8 | 15,9 | 2109 | K 875-625 | 1.02 | 25,8 | .48 | 12,3 |

Standard color black. Consult Heyco for white and other colors.


*Consult Heyco for other Mounting Hole and Inside Diameter configurations. Our Axcell Rapid Response Team is ready to meet your requirements.

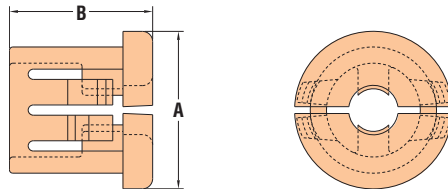

- The ID opens to accept the cable then closes firmly when installed into the mounting hole.
- Provide insulation plus light strain relief.
- Suitable for 1/8" (3,2 mm) to 5/8" (15,9 mm) diameter cable, tubing or hose.

Heyco® Sealing Washers

| WILL FIT THESE ELECTRICAL FITTING NPT TRADE SIZES | PART NO. Black | DESCRIPTION | PART DIMENSIONS | | | | | |
|---|-------------------|-------------|----------------------|------|-----------------------|------|----------------|-----|
| | | | A Inside Diameter | | B Outside Diameter | | C Thickness | |
| | | | in. | mm. | in. | mm. | in. | mm. |
| 1/4 | 3258 | SW 1/4 | .54 | 13,7 | .80 | 20,2 | .13 | 3,2 |
| 3/8 | 3259 | SW 3/8 | .67 | 17,0 | 1.01 | 25,5 | | |
| 1/2 | 3260 | SW 1/2 | .85 | 21,6 | 1.24 | 31,5 | | |
| 3/4 | 3261 | SW 3/4 | 1.03 | 26,2 | 1.50 | 38,1 | .14 | 3,4 |
| 1 | 3262 | SW 1 | 1.28 | 32,5 | 1.77 | 45,0 | .18 | 4,4 |
| 1-1/4 | 3264 | SW 1-1/4 | 1.66 | 42,2 | 2.16 | 54,8 | .16 | 4,1 |
| 1-1/2 | 3265 | SW 1-1/2 | 1.86 | 47,2 | 2.44 | 62,0 | | |
| 2 | 3257 | SW 2 | 2.32 | 58,9 | 2.93 | 74,4 | .18 | 4,6 |



- Make fittings and connectors liquid tight, dust tight, and oil tight at enclosure.
- Suitable for wet locations requiring a separate gasket between the box and fitting.
- Also suitable for other panel sealing applications.
- Easy to install since washers seal off on the perimeter, not on the connector threads.
- Special double sealing ridges compensate for minor unevenness at enclosure.

| | Snub Bushing | Sealing Washers |
|---------------------|---|-------------------------|
| Material | Nylon 6/6 | Thermoplastic Elastomer |
| Certifications | Recognized under the Component Program of Underwriters' Laboratories, File E15331 (Snub Bushings only) Certified by Canadian Standards Association, File 8919 (Snub Bushings only) | |
| Flammability Rating | 94V-2 | 94-V0 |
| Temperature Range | -4°F (-18°C) to 221°F (105°C) | |

Quick Specs