

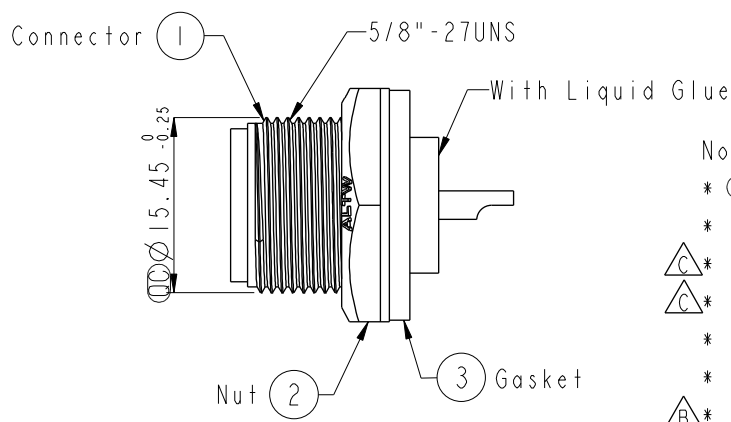


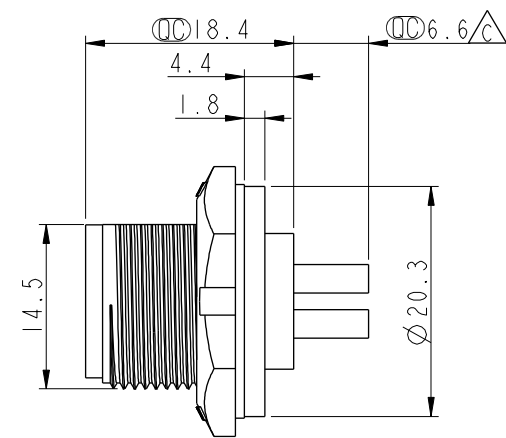


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-910219	2009/01/06	Li Xiu Zhi	Change 6.5 to 6.6
D	LEN1730276	2017/03/17	Ruru	Change Logo
E	CI90274	2019/02/19	Ruru	Modify Note

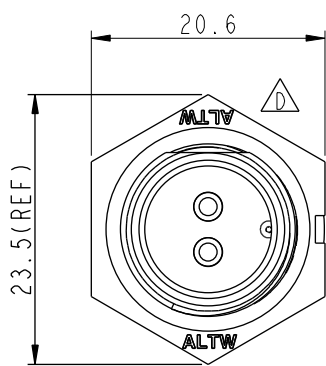

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.



Pin Assignments
Front View



Recommended Panel Cut-Out

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard		BB-02PMMS-SC7001		Ruru		2019-02-19	
.XXX ±0.05		ANGLES ±1°		Panel Screw 2Pin M Conn. M Pin		DWG NO		CHECKED BY		DATE	
REV. E		WC-REV. A.3		SCALE 1:1		BB-02PMMS-SC7001		Rita		2019-02-19	
SHEET 1 OF 1		QC: Inspection item		CUSTOMER		ALTW		APPROVED BY		DATE	
								Max		2019-02-19	

Amphenol LTW
安費諾亮泰企業股份有限公司