

# E Cores (9495110002)



Part Number: 9495110002

95 E CORE SET

**The E core geometry offers an economical design approach for inductive applications in a variety of power designs.**


E cores can be supplied with the center post gapped to a mechanical dimension or an  $A_L$  value.

[Catalog Drawing](#)  
[3D Model](#)

Weight indicated is per pair or set.

Weight: 32 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 32.1 | ±0.60  | 1.264        | —          |
| B   | 16.1 | ±0.30  | 0.634        | —          |
| C   | 9.15 | ±0.35  | 0.36         | —          |
| D   | 11.5 | ±0.30  | 0.453        | —          |
| E   | 22.7 | min    | 0.894        | min        |
| F   | 9.2  | ±0.30  | 0.362        | —          |

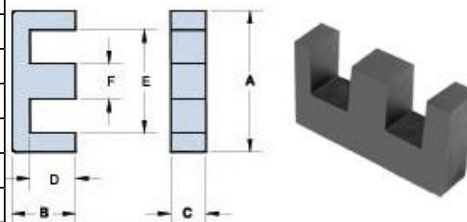

### Chart Legend

$\Sigma l / A$  : Core Constant,  $l_e$  : Effective Path Length,  $A_e$  : Effective Cross- Sectional Area,  $V_e$  : Effective Core Volume

$A_L$  : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

| Electrical Properties              |           |
|------------------------------------|-----------|
| $A_L$ (nH)                         | 3350 ±25% |
| $A_e$ (cm <sup>2</sup> )           | 0.821     |
| $\Sigma l / A$ (cm <sup>-1</sup> ) | 9.07      |
| $l_e$ (cm)                         | 7.45      |
| $V_e$ (cm <sup>3</sup> )           | 6.11      |
| $A_{min}$ (cm <sup>2</sup> )       | 0.79      |