


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-18-008015	24MAY2018	AP	DG

RECOMMENDED PCB LAYOUT
TOLERANCE IS ±0.05

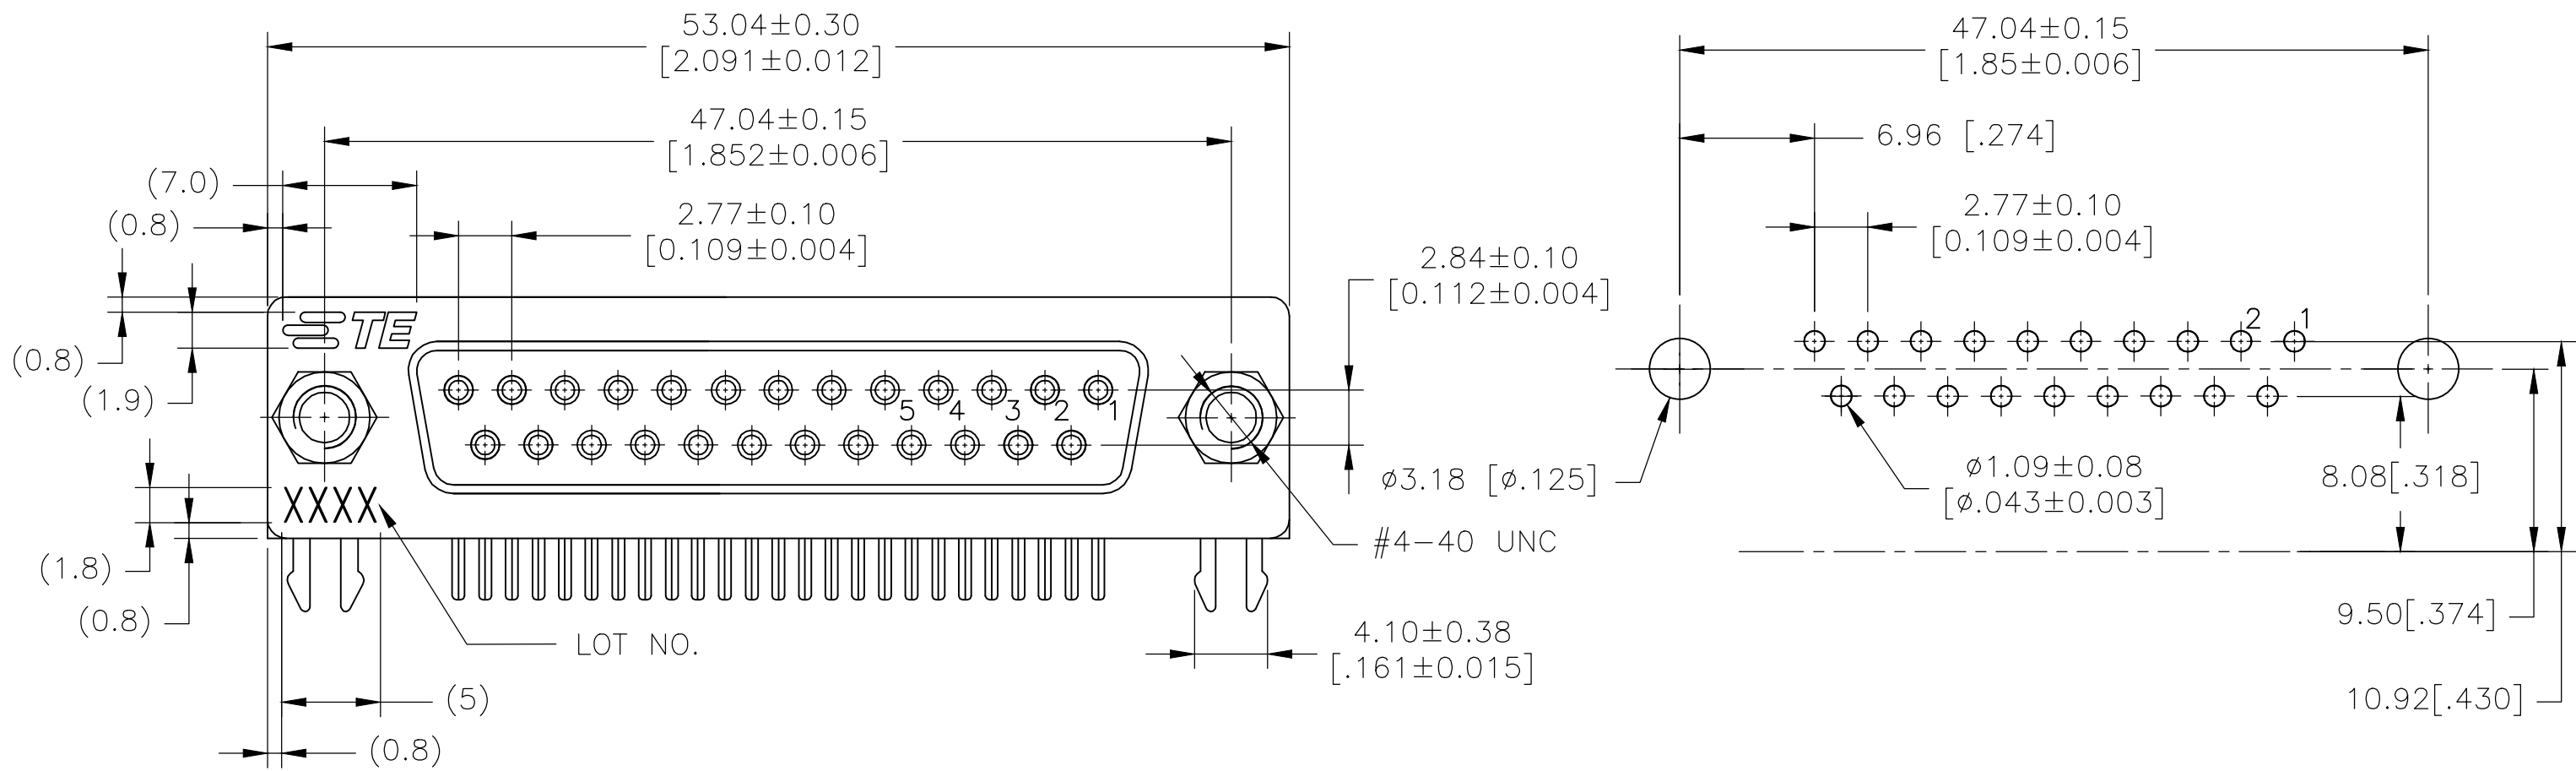


NOTES:

HOUSING:PBT+GF(UL94V-O) BLACK
CONTACT:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL
HOLDDOWN:BRASS,100u" TIN OVER 50u" NICKEL
SHELL:SPCC,NICKEL PLATED
RIVET:BRASS,NICKEL PLATED
SCREWLOCK:BRASS,NICKEL PLATED

LOT NUMBER "XXXX"

STANDS FOR CALENDAR YEAR
STANDS FOR WEEK NUMBER

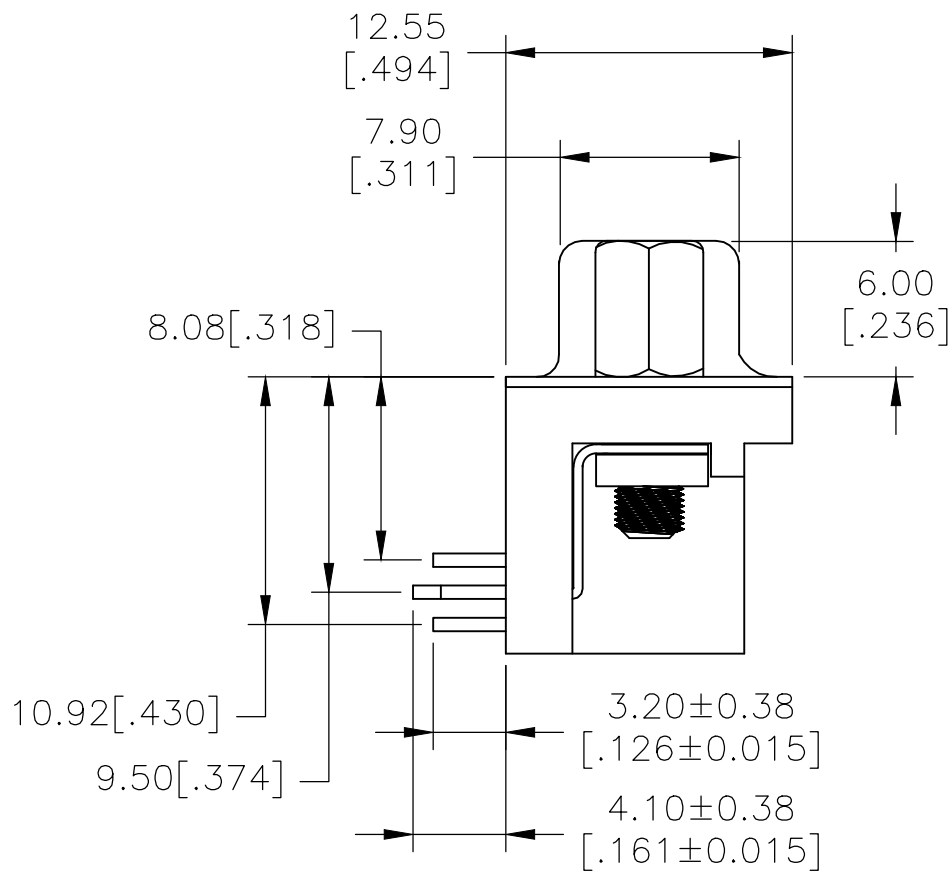

YES	Au Flash	2311766-1
SCREWLOCKS	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 03MAR2017	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK GORENC, DANIEL L. 03MAR2017				
		APVD GORENC, DANIEL L. 03MAR2017	NAME AMPLIMITE RECEPTACLE, HD20, RIGHT ANGLE, 25P SCREWLOCKS .318			
		PRODUCT SPEC 108-130023				
MATERIAL		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO. C=2311766	RESTRICTED TO -
FINISH		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1	REV D	