Ceramic Monoblock Duplex Filter




Model KFF6666A Technical Data

Features:

- Small Size
- High Performance
- SMD

Description and Applications:

This monoblock Duplexer filter is primarily designed for US PCS applications at 1850-1990 MHz.

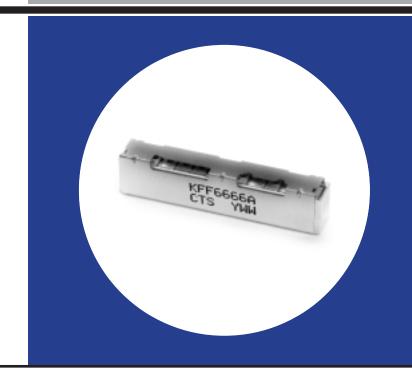

Electrical Specifications

Antenna to TX Response	Frequency	Specifications @ 25° C
Insertion Loss		3.4 dB max.
Return Loss @ TX	1850 MHz to 1910 MHz	11.0 dB min.
Return Loss @ ANT		11.0 dB min.
Attenuation	1930 MHz to 1990 MHz	40.0 dB min.
Antenna to RX Response	Frequency	Specifications @ 25° C
Insertion Loss	1930 MHz to 1990 MHz	3.4 dB max.
Return Loss @ RX		11.0 dB min.
Return Loss @ ANT		11.0 dB min.
Attenuation	1850 MHz to 1910 MHz	47.0 dB min.
TX to RX Response	Frequency	Specifications @ 25° C
Attenuation	1850 MHz to 1910 MHz	51.0 dB min.
Attenuation	1930 MHz to 1990 MHz	42.0 dB min.
Power Rating		2 W
Impedance		50 Ω


NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

SpecificationTypical AllowanceInsertion Loss0.1 dB


Return Loss 1.0 dB Stopbands 1.0 dB



Typical Response Curve

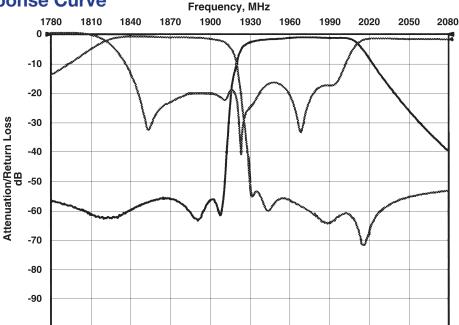


Mechanical Dimensions

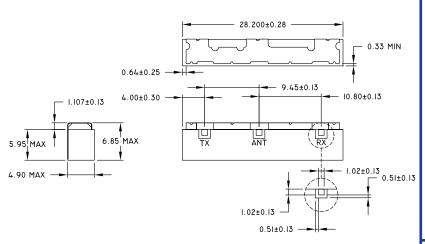


All dimensions in mm

Part Marking

Y = LAST DIGIT OF YEAR WW = SEQUENTIAL WEEK NUMBER




PC Board Layout

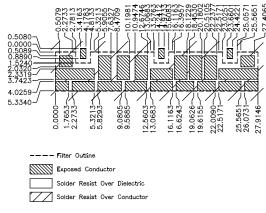

Packaging

Reel Quantity: 500 pcs. max.

Reel Weight: 5.0 lbs. max.



Contact Information:

CTS WIRELESS COMPONENTS, INC. / 171 Covington Drive / Bloomingdale, IL 60108 PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287082Y01 Rev 1

Date of Origin 04/18/01

Date of Revision 04/18/01