

DOUBLE WHITE LED FLEX RIBBON

Features

VOLTAGE: 12V DC
 CURRENT: 4200mA
 LED VIEWING ANGLE (2 θ 1/2): 120°

STANDARD PACKAGING:
 5 Meter Reel (300 LED's)

OPTIONAL PACKAGING:
 Individual 500mm Sections (30 LED's)
 Order as ZFS-105000-DBW/XXSEC
 Note: Individual Sections ARE NOT supplied
 with insulated wire connection.



Maximum Ratings


Parameter	Symbol	Rating	Unit
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-0~+40	°C
Storage Temperature	Tstg	-40~+100	°C

Accessories

ZCTR-05: RF Wireless Touch LED Remote Controller

Electro-Optical Characteristics (Ta = 25° C)

Color	Number of LED's per Reel	Input Voltage (V DC)	Power (W)	Current (A)	Radiance Angle	CCT (K)	Lumen Flux (lm)
Cool White	300	12	25.0	2.1	120°	6475	1740
Warm White	300	12	25.0	2.1	120°	3284	1620

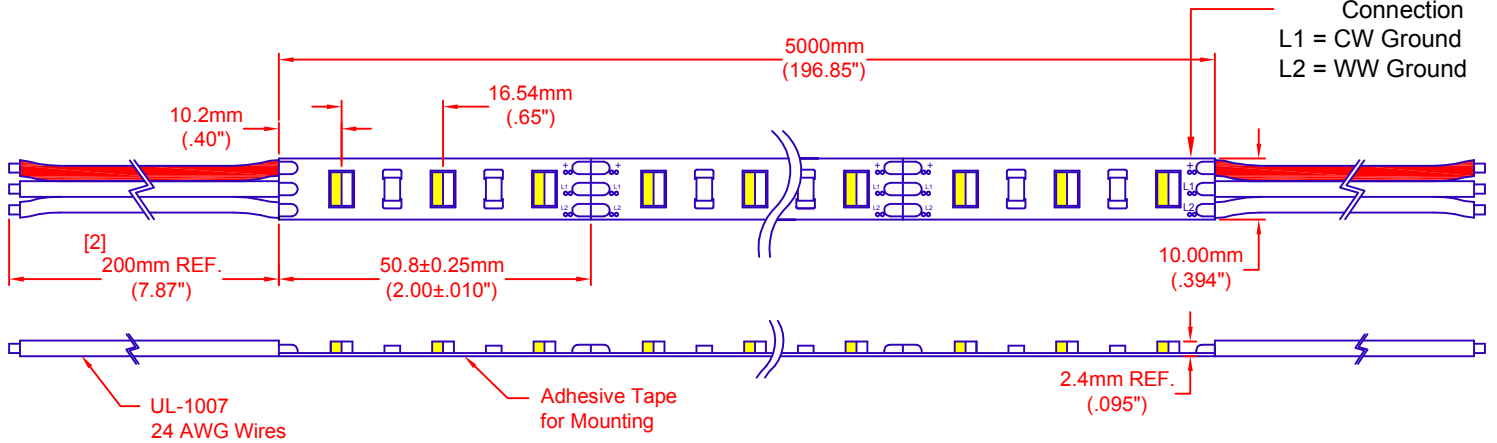

ATTENTION
 OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

Note: Please refer to JKL Application Sheet JKL- AS-ZFS-105000-DBW LED FLEX for Installation and Power Recommendations.

		METRIC		DIMENSIONS ARE IN mm (INCHES)		 JKL COMPONENTS CORPORATION							
		 THIRD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-						TITLE DOUBLE WHITE 12V LED FLEX RIBBON			
B ADD UL SYMBOL		3/31/15		DRAWN BY L. WENGSTROM		APP'VD BY DATE S.C. 3/31/15		SIZE A		FSCM NO. 55335		DRAWING NO. ZFS-105000-DBW	
A ADD TAPE SYMBOL NOTE		10/9/14		RELEASED		3/18/14		SCALE NONE		RELEASED DATE 3/18/14		REVISION DATE 3/31/15	
REV. NO.		DESCRIPTION/ECO NUMBER		APP'VD DATE		- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED				REV. NO. B		SHEET 1 OF 1	