


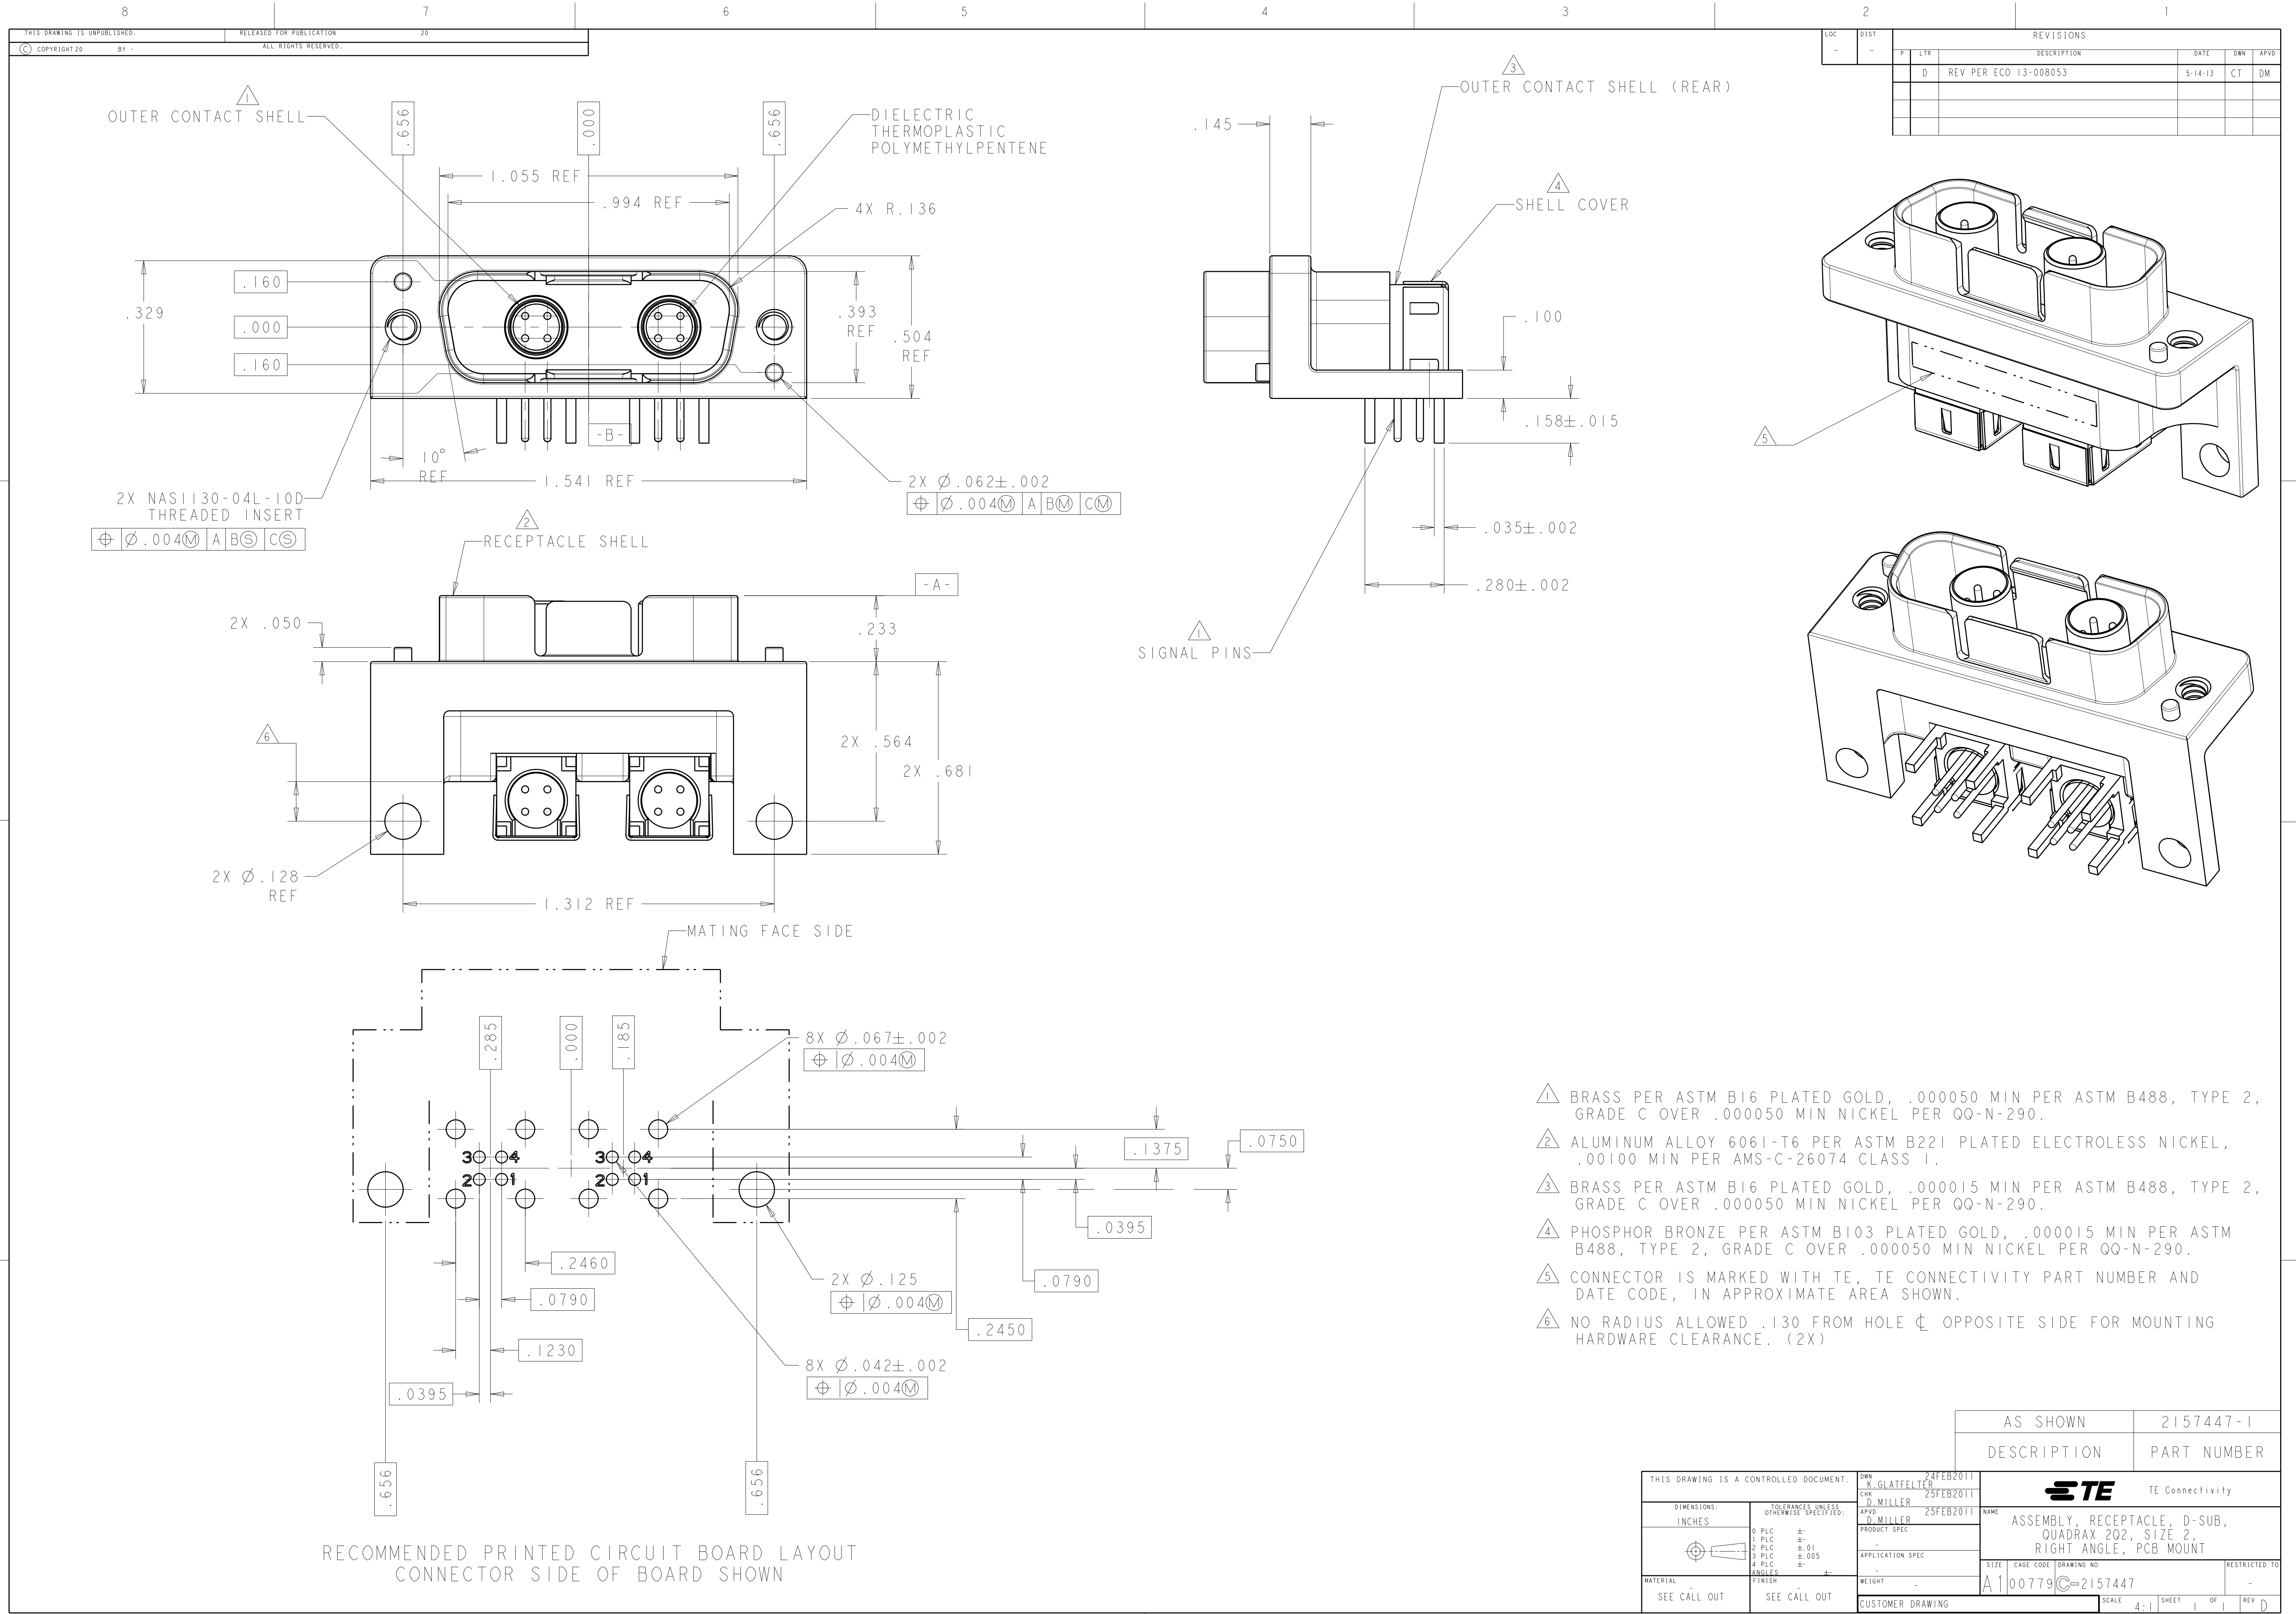

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
D		REV PER ECO 13-008053		5-14-13	CT	DM	

- 1 BRASS PER ASTM B16 PLATED GOLD, .000050 MIN PER ASTM B488, TYPE 2, GRADE C OVER .000050 MIN NICKEL PER QQ-N-290.
- 2 ALUMINUM ALLOY 6061-T6 PER ASTM B221 PLATED ELECTROLESS NICKEL, .00100 MIN PER AMS-C-26074 CLASS 1.
- 3 BRASS PER ASTM B16 PLATED GOLD, .000015 MIN PER ASTM B488, TYPE 2, GRADE C OVER .000050 MIN NICKEL PER QQ-N-290.
- 4 PHOSPHOR BRONZE PER ASTM B103 PLATED GOLD, .000015 MIN PER ASTM B488, TYPE 2, GRADE C OVER .000050 MIN NICKEL PER QQ-N-290.
- 5 CONNECTOR IS MARKED WITH TE, TE CONNECTIVITY PART NUMBER AND DATE CODE, IN APPROXIMATE AREA SHOWN.
- 6 NO RADIUS ALLOWED .130 FROM HOLE $\varnothing$ OPPOSITE SIDE FOR MOUNTING HARDWARE CLEARANCE. (2X)

AS SHOWN	2157447-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. GLATFELT CHK D. MILLER APVD D. MILLER	24FEB2011 25FEB2011 25FEB2011	TE Connectivity			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC	±"	PRODUCT SPEC			
		1 PLC	±.01				
		2 PLC	±.01				
		3 PLC	±.005				
MATERIAL		FINISH		APPLICATION SPEC			
SEE CALL OUT		SEE CALL OUT		WEIGHT			
				CUSTOMER DRAWING			
				SCALE 4:1			
				SHEET 1 OF 1			
				REV D			

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
CONNECTOR SIDE OF BOARD SHOWN