


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

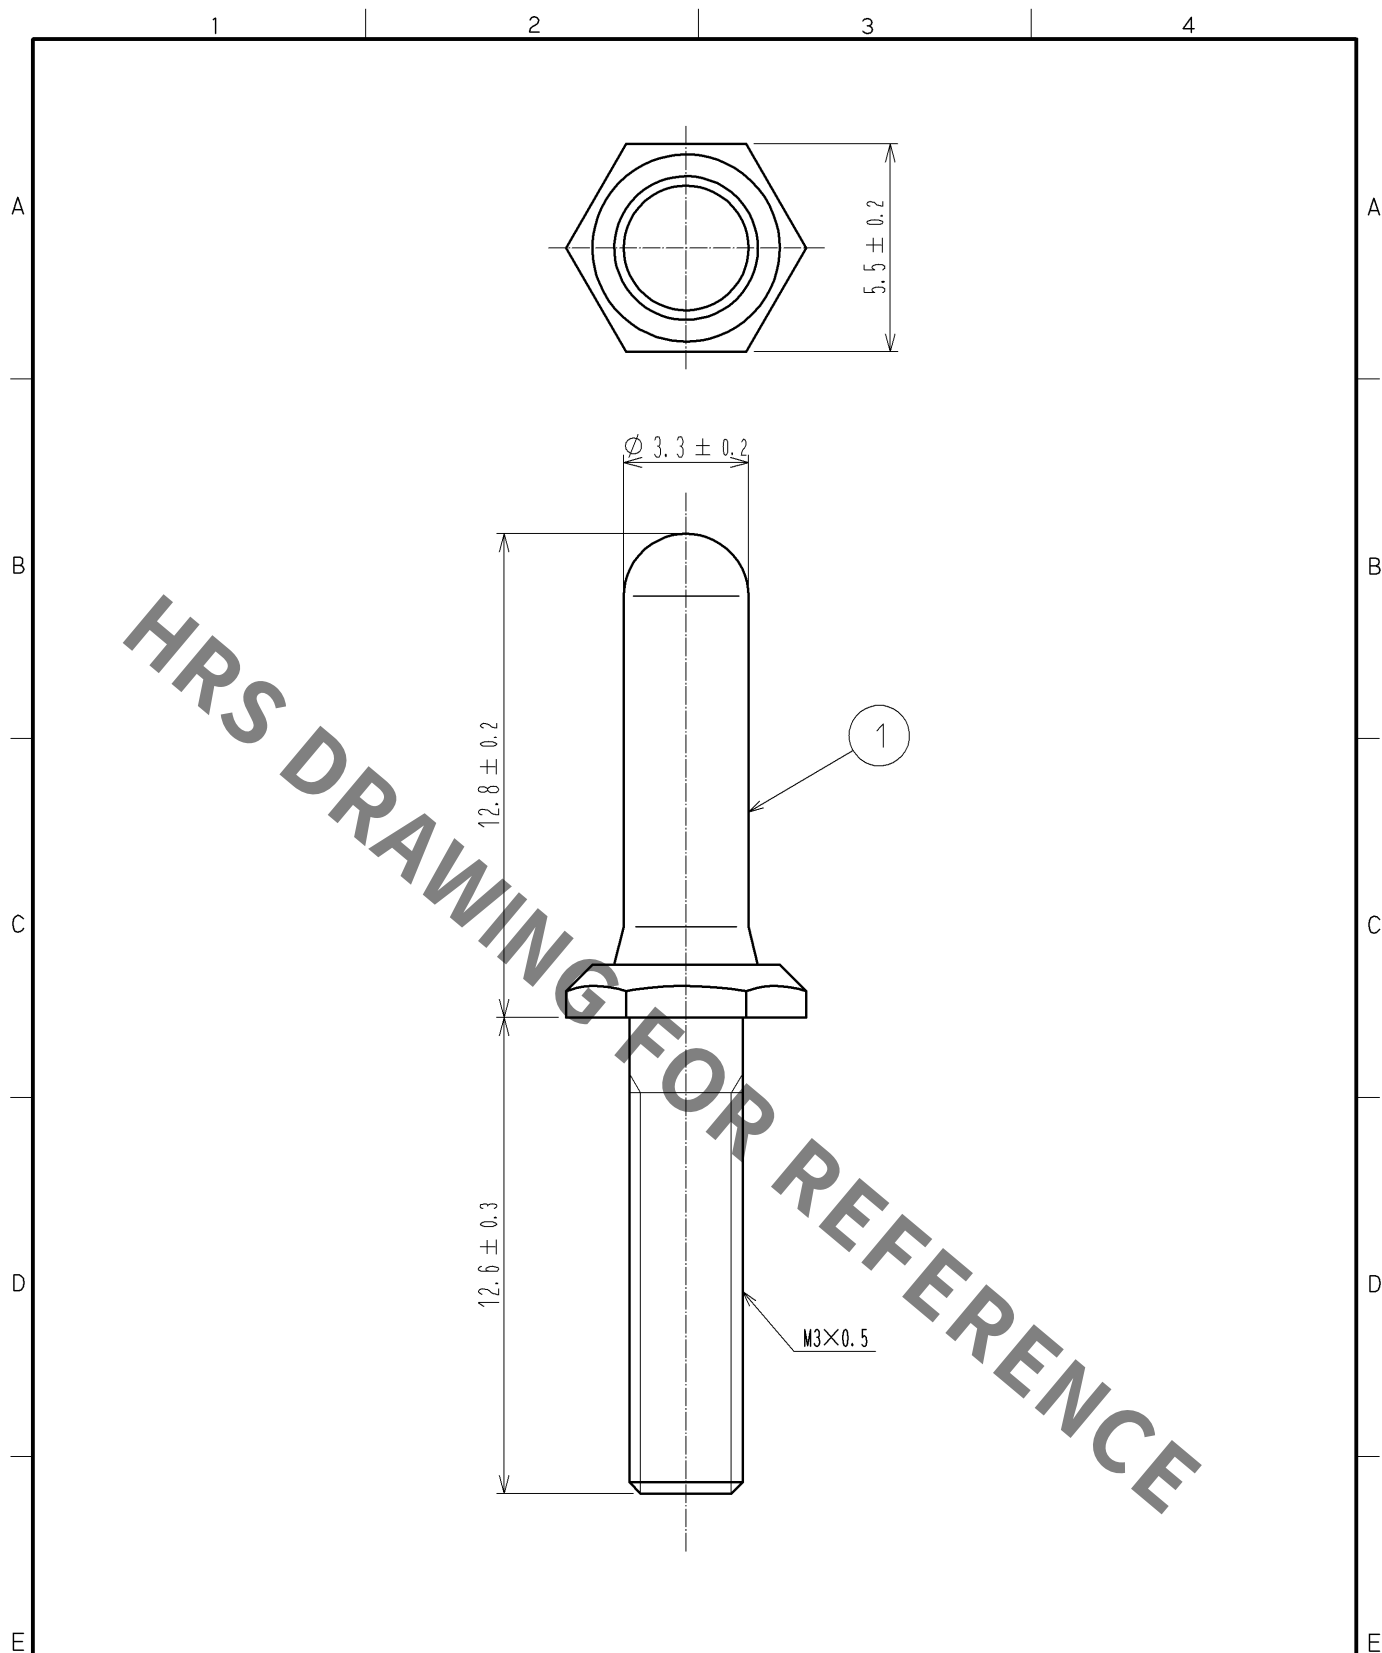

- NOTE 1. 1 PAKKING : 2 PCS.
2. THE RECOMMENDED TIGHTENING TORQUE TO BE 0.63 N · m.

1	BRASS	UNDER PLATING: COPPER $1 \mu\text{m}$ MIN. OVER PLATING: NICKEL $2 \mu\text{m}$ MIN.						
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	12. 08. 23	DRAWING NO. EDC4-127151-00				
		CHECKED : EJ. WAKATSUKI	12. 08. 23	PART NO. EX-PG				
		DESIGNED : MO. SHIMOYAMA	12. 08. 23	CODE NO. CL232-0629-0-00				
		DRAWN : MO. SHIMOYAMA	12. 08. 23					