
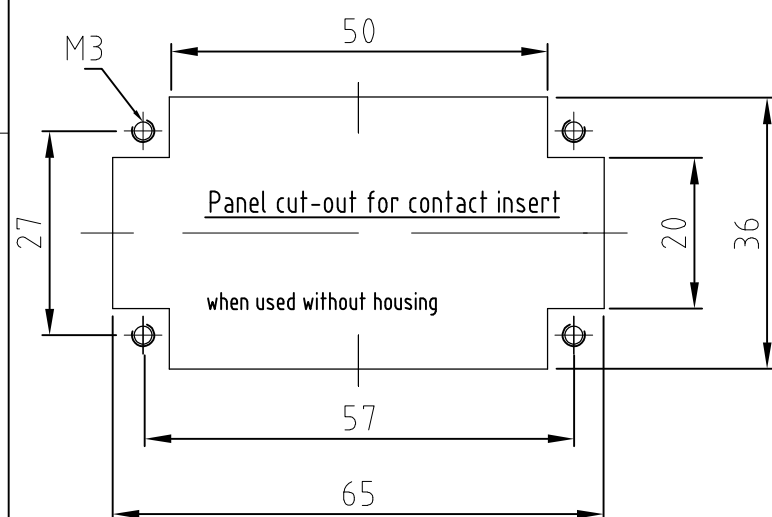
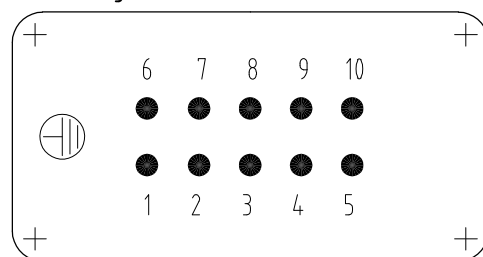

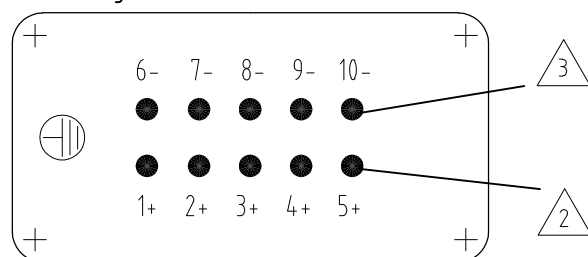

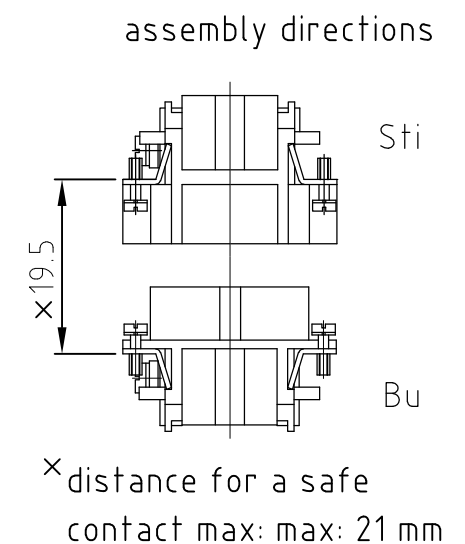
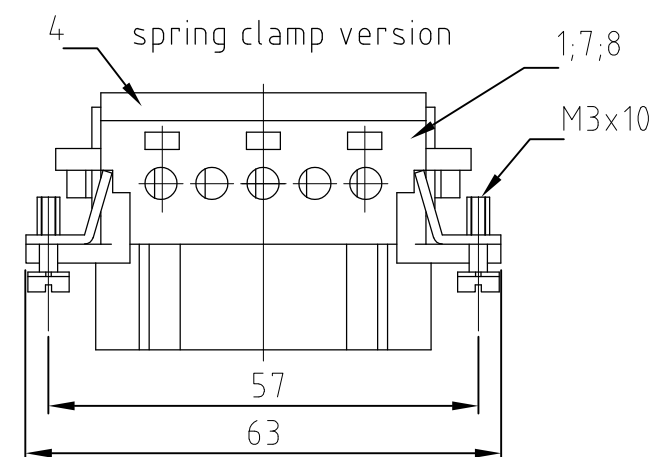
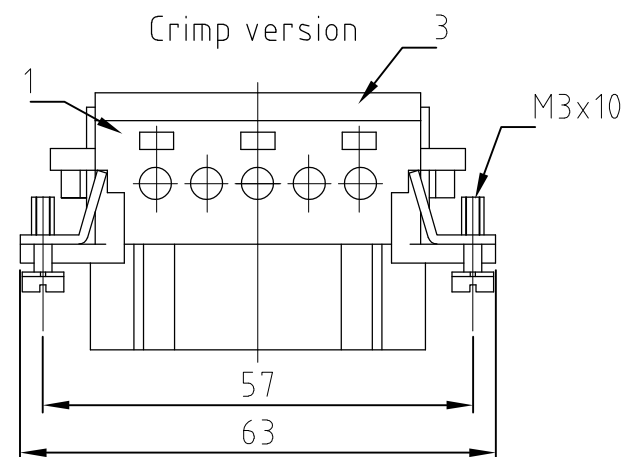
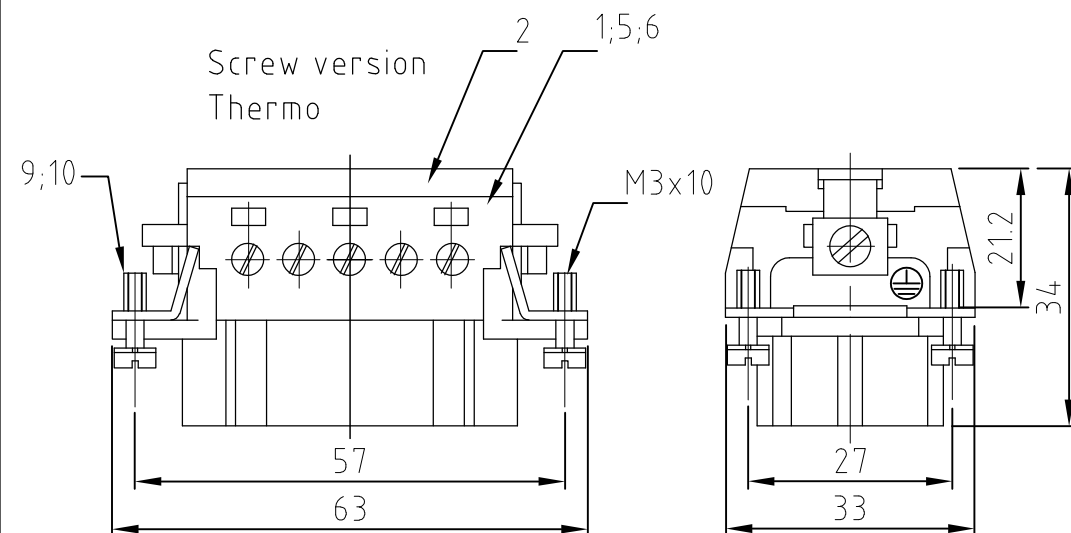




OBSOLETE		OBSOLETE				OBSOLETE				OBSOLETE					
		4							fixing screw	stainless steel	even		10	M3x10	
4	4		4	4	4	4	4		fixing scw	steel	nickel plated	blue	9	M3x10	
10									contact socket spring clamp	brass	gold plated		8		
				10					contact socket spring clamp	brass	silver plated		7		
			10						contact socket screw version	brass	gold plated		6		
	10	10					10		contact socket screw version	brass	silver plated		5		
1				1					cover spring clamp version			light grey	4		
					1				cover crimp version			light grey	3		
	1	1	1			1	1		cover screw version			light grey	2		
1	1	1	1	1	1	1	1		socket insert			light grey	1		
0-3	0-2	0-1	9-5	7-1	2-3	1-7	1-1		DESCRIPTION	MATERIAL	SURFACE	COLOR	ITEM NO. POS.	REMARKS	
HE.10.Bu.SC-AU		HE.10.Bu.S-KM		HE.10.Bu.S-VA		HE.10.Bu.S-AU		HE.10.Bu.SC		HE.10.Bu.C		HE.10.Bu.S-T		HE.10.Bu.S	
ORDERING TEXT / BESTELLTEXT		THIS DRAWING IS A CONTROLLED DOCUMENT. DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.		DWN 09.02.99 Gräf		TE Connectivity Female insert Buchseneinsatz HE.10.Bu									
DIMENSIONS: MASSENEHTEEN: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALL GEMEINTOLERANZEN		CHK 18.02.99 Schweiger											
		0 PLC ± 0.15 1 PLC ± 0.15 2 PLC ± 0.15 3 PLC ± 0.15 4 PLC ± 0.15 ANGLES / WINKEL ± 0.5		APVD -											
MATERIAL		FINISH/OBERFLÄCHE/FARBE		PRODUCT SPEC PRODUKTSPEZ.		NAME									
				APPLICATION SPEC VERARBEITUNGSSPEZ.											
				WEIGHT GEWICHT		SIZE CAGE CODE DRAWING NO ZEICHNUNGS-NR.									
				CUSTOMER DRAWING/KUNDENZEICHNUNG											
				SCALE MASSSTAB 1:1		SHEET BLATT 1 OF VON 1									
				REV A9											