

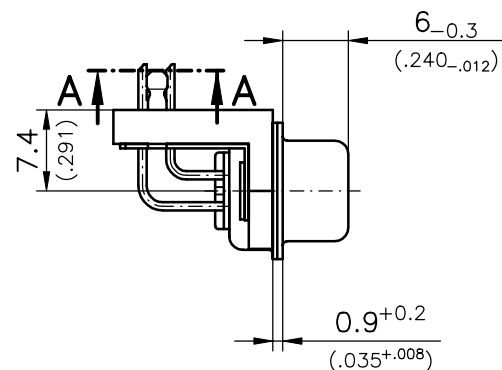
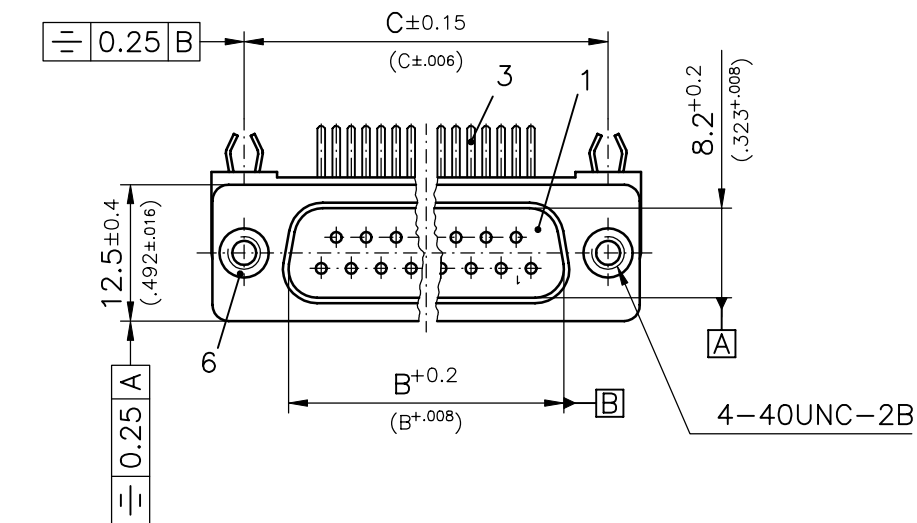
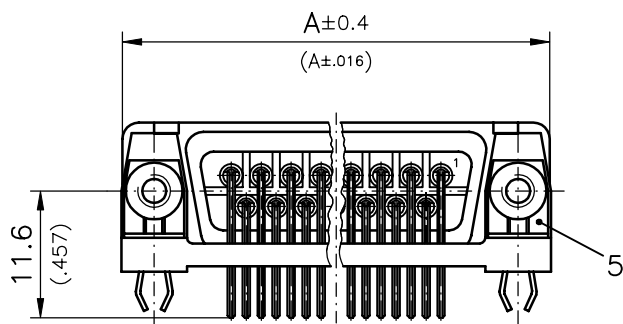


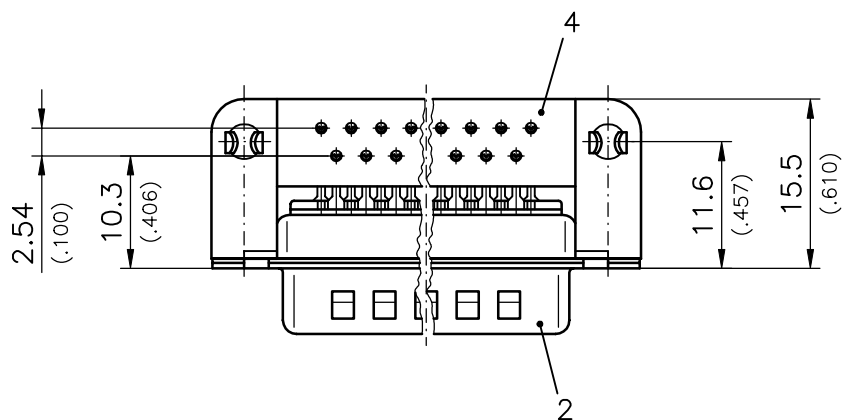

A-A 10:1



Fxx*₁)P5SGy*₂)-K228

e.g. F37P5SG2-K228

*1) xx No. of contacts 09, 15, 25 or 37

*2) y for performance classes 1, 2 or 3
(contact cycle for G1/G2/G3 = 500/200/50)

xx	A mm (Zoll)	B mm (Zoll)	C mm (Zoll)	øE mm (Zoll)	øF mm (Zoll)	G mm (Zoll)	H mm (Zoll)	J mm (Zoll)
09	30.8 (1.213)	16.9 (.665)	25.0 (.984)	ø 1 (ø.039)	ø 3 (ø.118)	10.7 (.421)	9.4 (.370)	2.54 (.100)
15	39.1 (1.539)	25.2 (.992)	33.3 (1.311)					
25	53.0 (2.087)	38.9 (1.531)	47.04 (1.852)					
37	69.3 (2.728)	55.3 (2.177)	63.5 (2.500)					

*PCB hole patterns, øE, øF, G, H, J on supplement AM0024
Inch Measurements in Brackets

9	—	—	—	—	FCT electronic gmbh München		
8	—	—	—	—			
7	—	—	—	—			
6	2	Clinch nut	KW4—40 / Brass	tin plated	Measurement without tolerance acc. to ISO 2768—m		
5	2	Snap—in bracket	PCB 1.6 (.063) / Bz	tin plated			
4	1	Plastic bracket	FKW1—4GS / plastic	black	Original: DIN A3— drawing as a file	Scale 2:1	
3	xx	Signal contact	P5S / Brass	G1/G2/G3			
2	1	Shell	Steel	tin plated			
1	1	Insulator	PBTP (—55°C — +125°C)	black	Replacement for: —		
No.		St.	Part	Type	Description/Material	Surface plating/Colour/Class	Drawing—No.: FxxP5SGy—K228
				Sheet	1/1	Part—No.:	FxxP5SGy—K228
					Date	Name	Title D—Sub Miniature Connector
				Drawn	10.12.2003	Denzinger	
				Checked	10.12.2003	Schiekofer	
Ch.—No.		Rev.	Date	Name			

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT
OUR PRIOR CONSENT, IT MAY NEITHER BE DUPLICATED NOR MADE
AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE
IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.