



REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
	D2	REVISED PER ECR-16-011494	21JUN2017	NK	CX

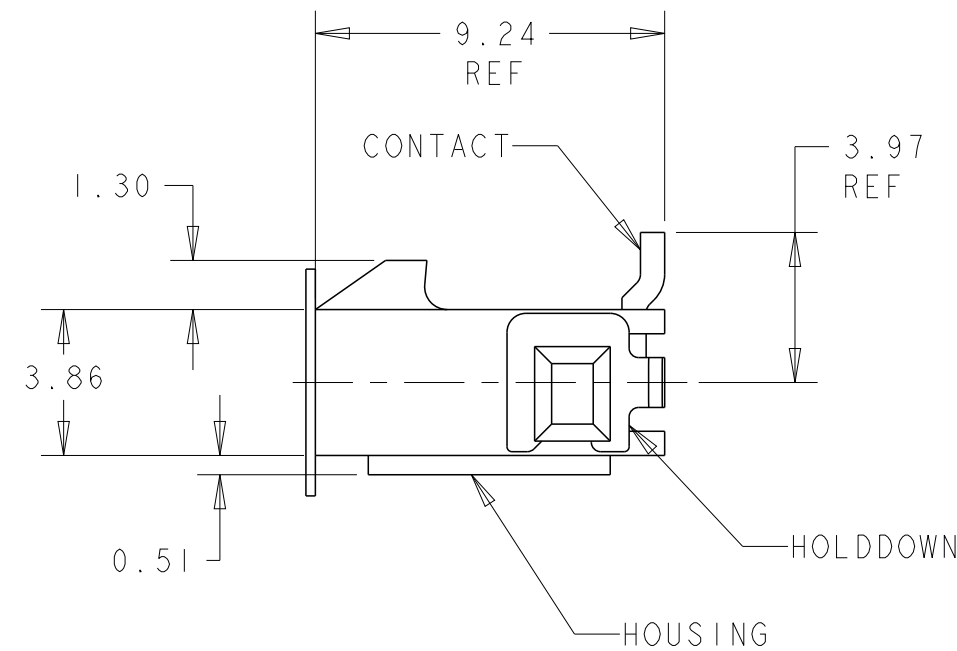

6 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END.
2.54µm MINIMUM TIN ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM
NICKEL.

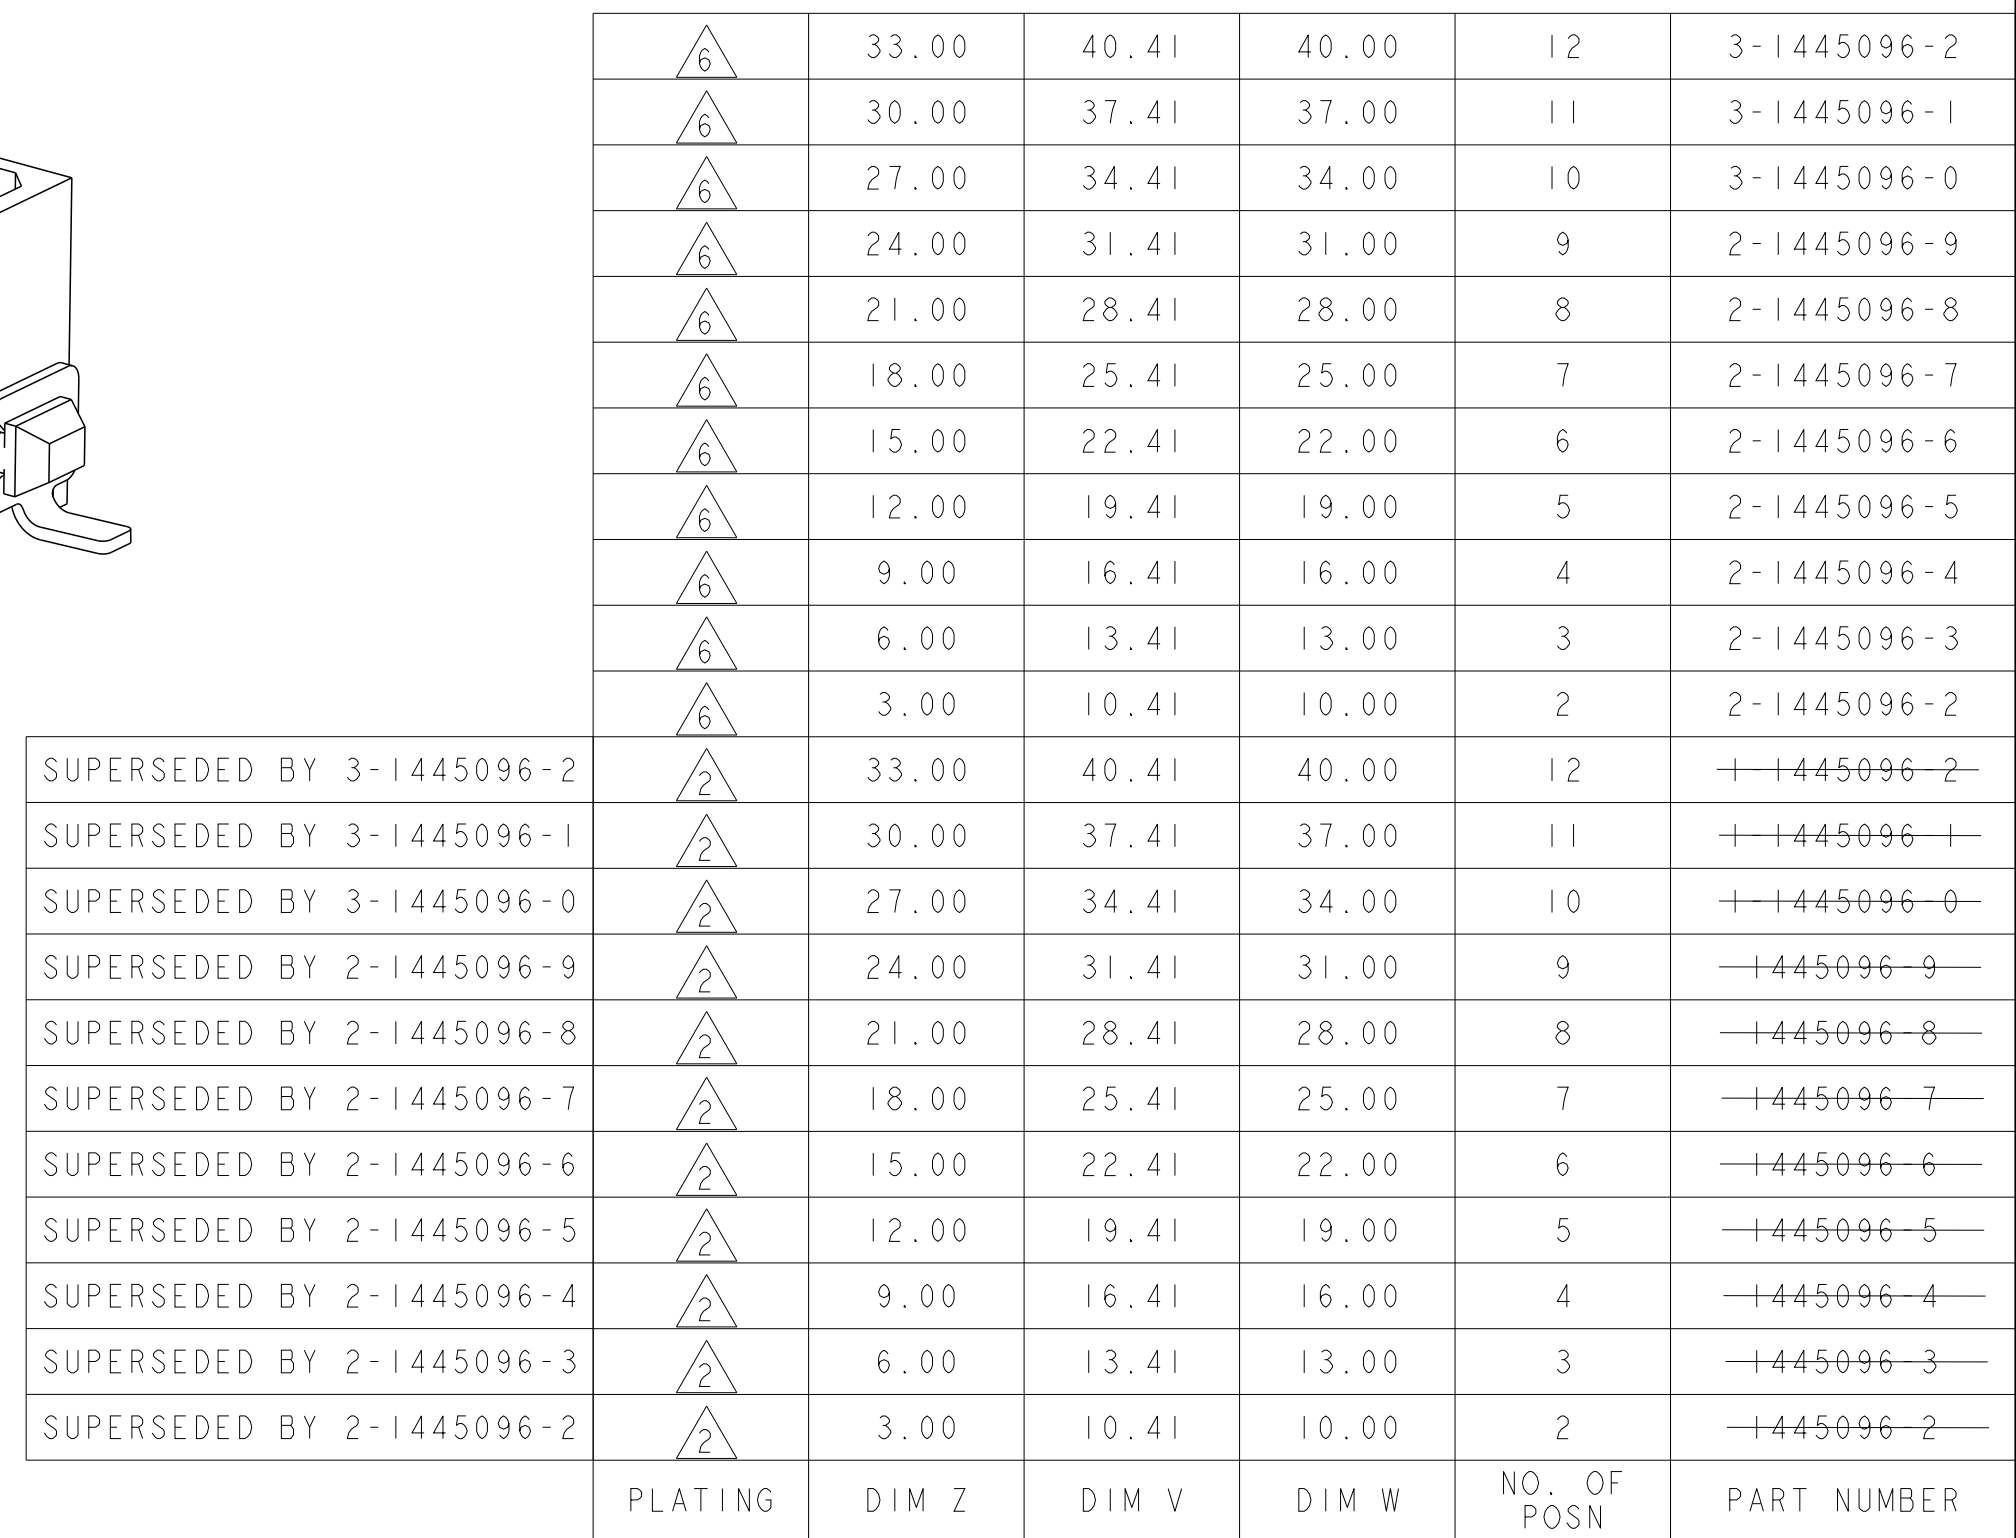

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 09OCT2000		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME VERTICAL SURFACE MOUNT HEADER ASSY, 30 MIC GOLD CONTACTS, SURF MOUNT HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™	
MATERIAL		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE CAGE CODE DRAWING NO A2 00779 C-1445096	
SEE TABLE		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV D2	