




For SMT Process Recommend:




About Fixture:

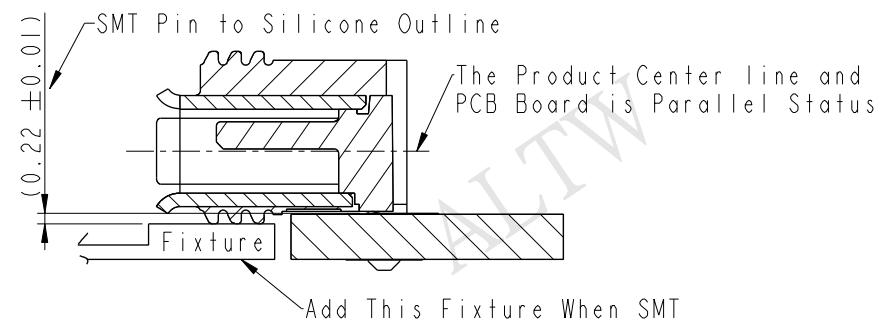

About IR Reflow Profire:

溫度設置(攝氏)								
溫區	1	2	3	4	5	6	7	8
上溫區	160	180	180	180	190	245	265	260
下溫區	160	180	180	180	190	245	265	260
傳送帶速度(米/分):	0.95							

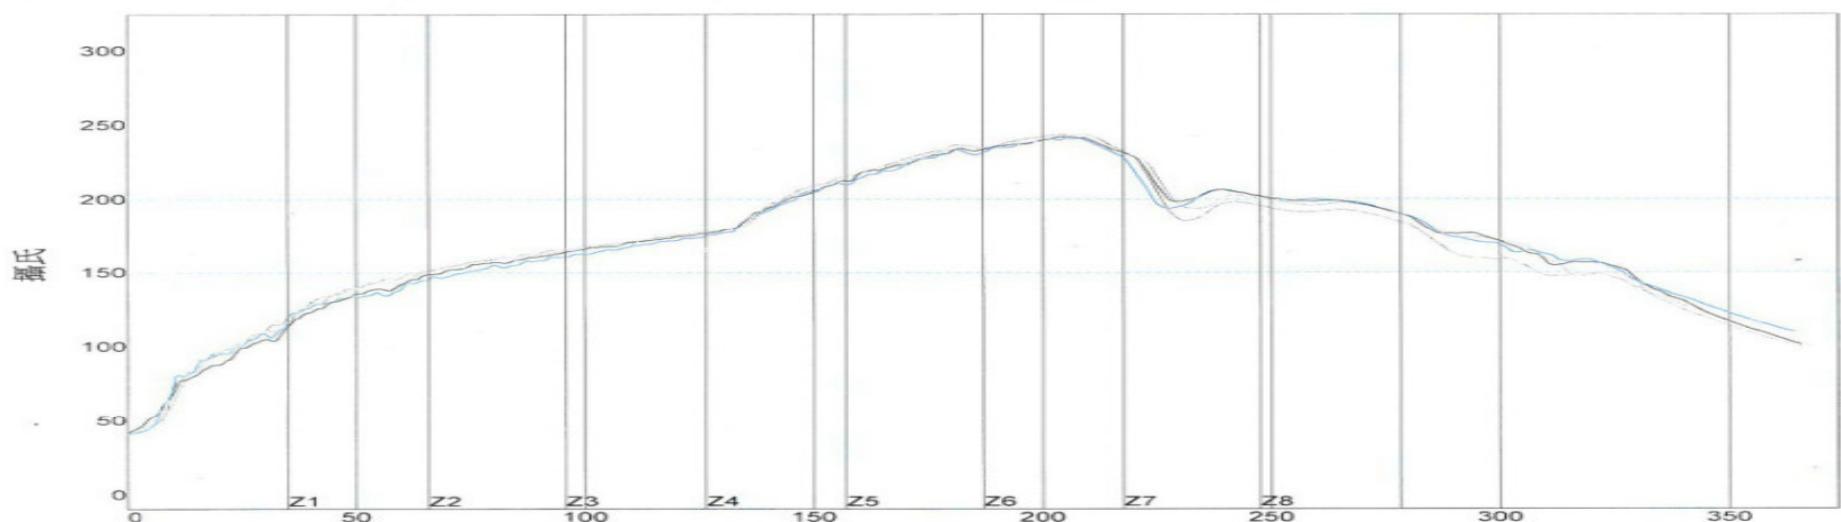


PWI = 61%	最高上升斜率	最高下降斜率	恒溫時間150至200C	回流時間/220C	最高溫度
CON1	2.81	-6%	-2.33	33%	80.21
CON2	2.38	-21%	-2.14	43%	75.61
CON3	2.81	-6%	-2.84	8%	77.79
CON4	2.83	-6%	-2.34	33%	72.24
溫差	0.45		0.70		7.97


UNIT:mm		TITLE WATERPROOF MICRO-AB USB PANEL 20MAB F CONN JACK LENGTH PIN			ITEM NO	DRAWN BY Jason Yu	DATE 2016/07/25
TOLERANCE		SCALE Free	SIZE A4	SHEET 3 OF 4	DWG NO MUC-20PFFR-JSXX02	CHECKED BY Arvin Chan	DATE 2016/07/25
.X	±0.25	REV. A	WC-REV. A.1	(QC) Inspection item	CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2016/07/25
.XX	±0.1						
.XXX	±0.05						
ANGLES	±1°						

Amphenol LTW
安費諾亮泰企業股份有限公司



Package:

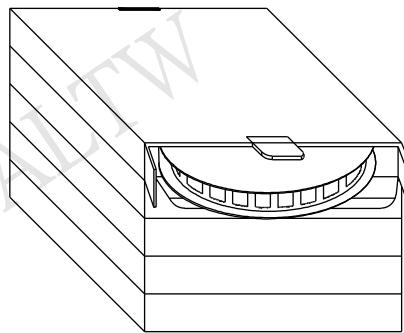

1000 PCS(Connector)/Tape&Reel, Put in a Box

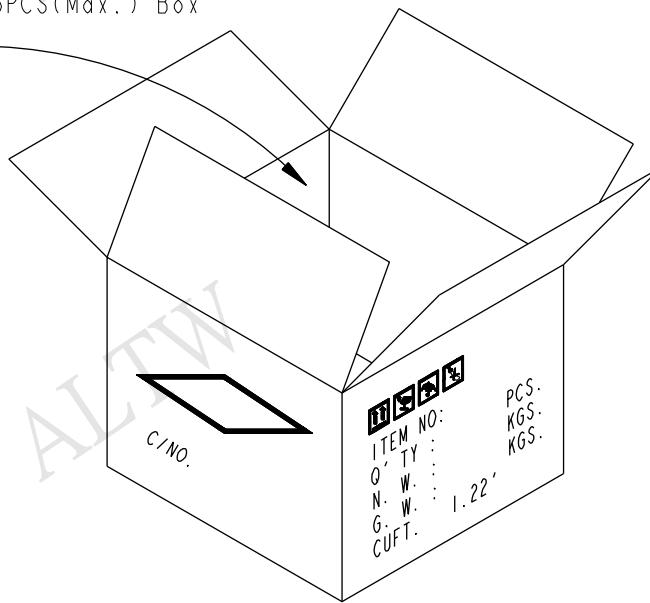

(5,000 PCS/Carton)



F

E

D

C

B

A

I

UNIT:mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	±1°	

TITLE			
WATERPROOF MICRO-AB USB PANEL 20MAB F CONN JACK LENGTH PIN			
SCALE	SIZE	SHEET	OF
Free	A4	4	4
REV.	A	WC-REV.	A.1
(QC) Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
MUC-20PFFR-JSXX02	Jason Yu	2016/07/25
CUSTOMER	CHECKED BY	DATE
ALTW	Arvin Chan	2016/07/25
APPROVED BY	DATE	
Kevin Hu	2016/07/25	