


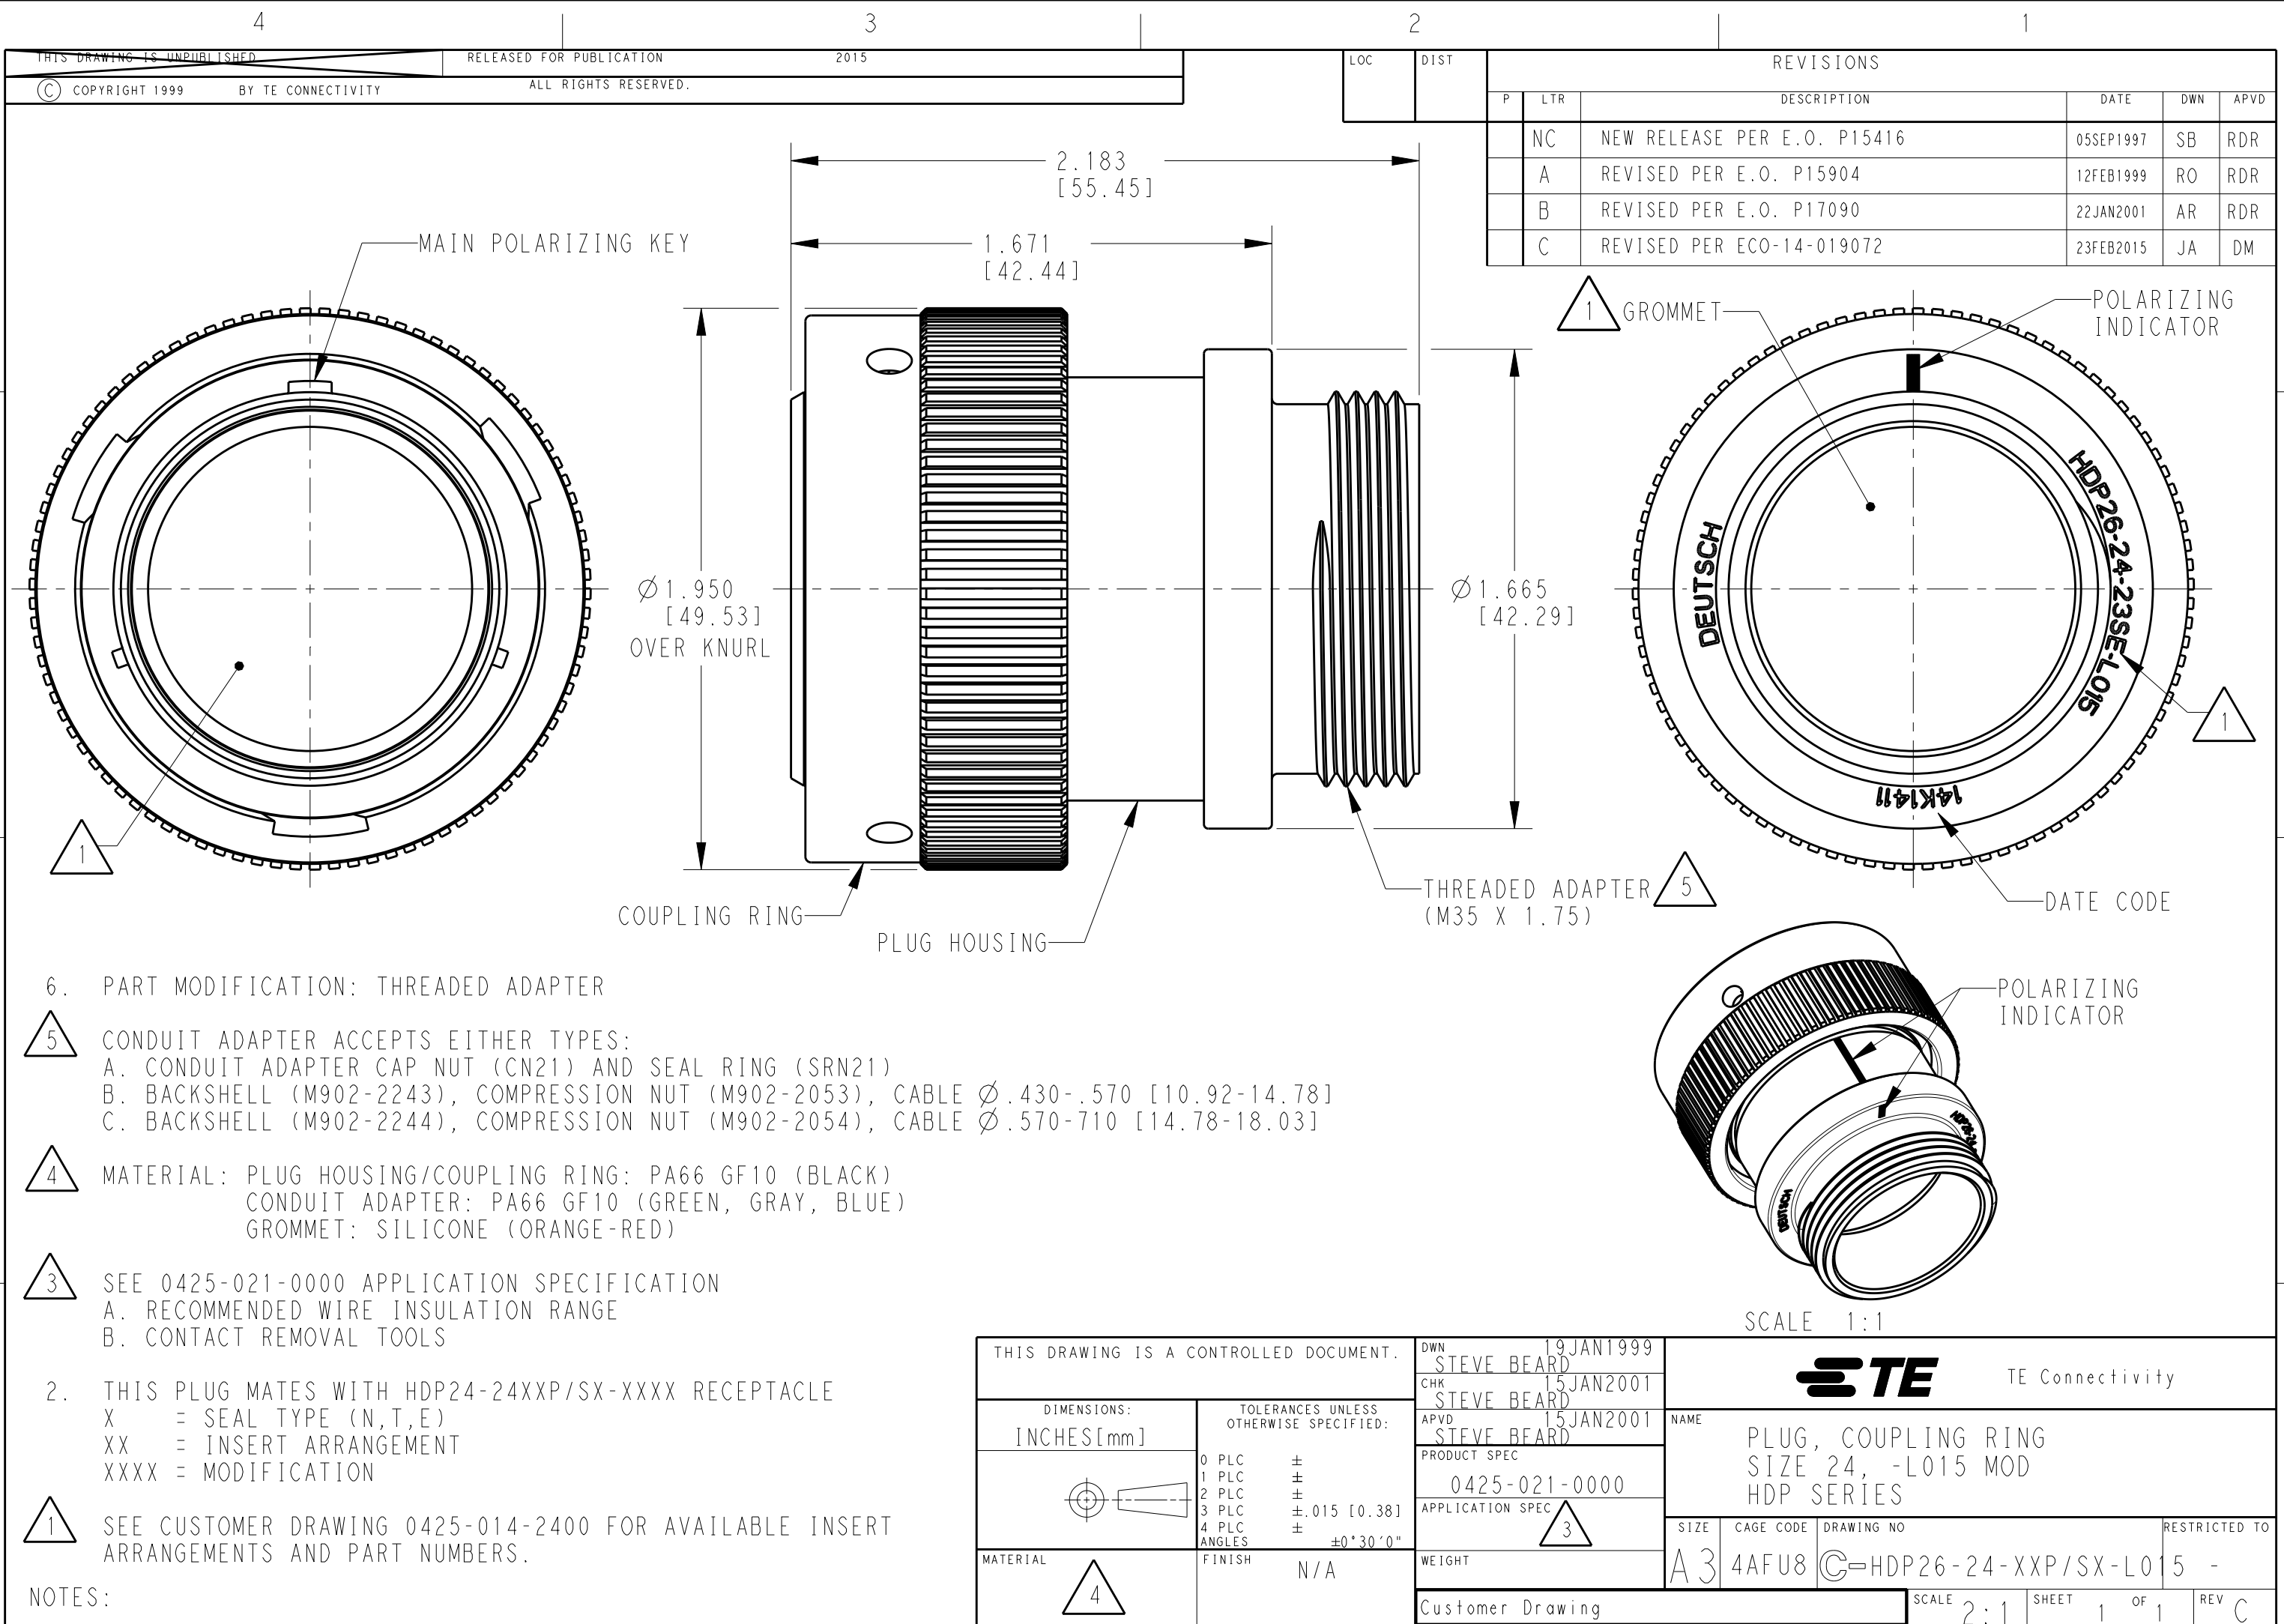

6. PART MODIFICATION: THREADED ADAPTER

- 5 CONDUIT ADAPTER ACCEPTS EITHER TYPES:
A. CONDUIT ADAPTER CAP NUT (CN21) AND SEAL RING (SRN21)
B. BACKSHELL (M902-2243), COMPRESSION NUT (M902-2053), CABLE Ø.430-.570 [10.92-14.78]
C. BACKSHELL (M902-2244), COMPRESSION NUT (M902-2054), CABLE Ø.570-710 [14.78-18.03]

- 4 MATERIAL: PLUG HOUSING/COUPLING RING: PA66 GF10 (BLACK)
CONDUIT ADAPTER: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)

- 3 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS

2. THIS PLUG MATES WITH HDP24-24XXP/SX-XXXX RECEPTACLE
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION

- 1 SEE CUSTOMER DRAWING 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19JAN1999 STEVE BEARD	TE TE Connectivity	
DIMENSIONS: INCHES[mm]		CHK 15JAN2001 STEVE BEARD		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 15JAN2001 STEVE BEARD	NAME PLUG, COUPLING RING SIZE 24, -L015 MOD HDP SERIES	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.015 [0.38] 4 PLC ± ANGLES ±0°30'0"	PRODUCT SPEC 0425-021-0000		
MATERIAL 4	FINISH N/A	APPLICATION SPEC 3	SIZE A3	CAGE CODE 4AFU8
Customer Drawing		WEIGHT	DRAWING NO. C-HDP26-24-XXP/SX-L015	RESTRICTED TO
		SCALE 2:1	SHEET 1 OF 1	REV C