

# Advanced Low Power 5V RS232 Drivers/Receivers with Small Capacitors

## FEATURES

- ESD Protection over  $\pm 10\text{kV}$   
( $\pm 15\text{kV}$  IEC-1000-4-2 for LT1133A, LT1137A and LT1141A)
- Uses Small Capacitors:  $0.1\mu\text{F}$ ,  $0.2\mu\text{F}$
- $1\mu\text{A}$  Supply Current in SHUTDOWN
- 120kBaud Operation for  $R_L = 3\text{k}$ ,  $C_L = 2500\text{pF}$
- 250kBaud Operation for  $R_L = 3\text{k}$ ,  $C_L = 1000\text{pF}$
- CMOS Comparable Low Power
- Easy PC Layout: Flowthrough Architecture
- Rugged Bipolar Design: Absolutely No Latchup
- Outputs Assume a High Impedance State When Off or Powered Down
- Improved Protection: RS232 I/O Lines Can Be Forced to  $\pm 30\text{V}$  Without Damage
- Output Overvoltage Does Not Force Current Back into Supplies
- Available in SO and SSOP Packages

## DESCRIPTION


The LT<sup>®</sup>1130A/LT1140A series of RS232 drivers/receivers features special bipolar construction techniques which protect the drivers and receivers beyond the fault conditions stipulated for RS232. Driver outputs and receiver inputs can be shorted to  $\pm 30\text{V}$  without damaging the device or the power supply generator. In addition, the RS232 I/O pins are resilient to multiple  $\pm 10\text{kV}$  ESD strikes. An advanced driver output stage operates up to 250kbaud while driving heavy capacitive loads. Supply current is typically 12mA, competitive with CMOS devices.

Several members of the series include flexible operating mode controls. The DRIVER DISABLE pin disables the drivers and the charge pump, the ON/OFF pin shuts down all circuitry. While shut down, the drivers and receivers assume high impedance output states.


**LT**, LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

## Basic Operation

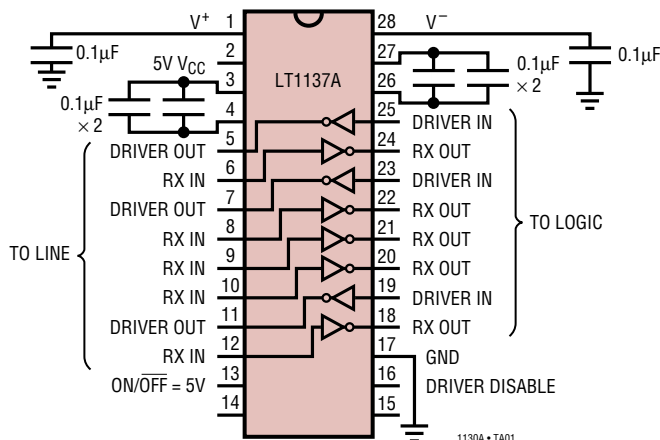

## Output Waveforms

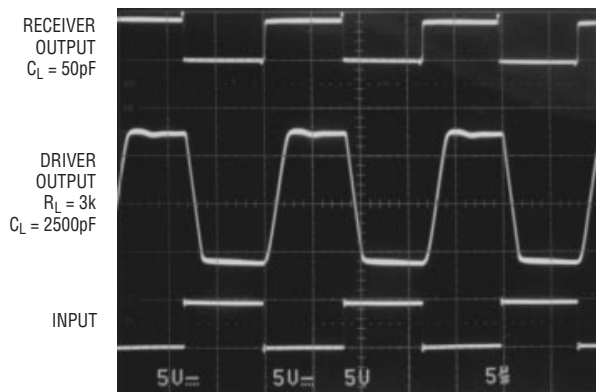

LT1130A • TA02

LT1130A 5-Driver/5-Receiver RS232 Transceiver  
 LT1131A 5-Driver/4-Receiver RS232 Transceiver w/Shutdown  
 LT1132A 5-Driver/3-Receiver RS232 Transceiver  
 LT1133A 3-Driver/5-Receiver RS232 Transceiver  
 LT1134A 4-Driver/4-Receiver RS232 Transceiver  
 LT1135A 5-Driver/3-Receiver RS232 Transceiver w/o Charge Pump

LT1136A 4-Driver/5-Receiver RS232 Transceiver w/Shutdown  
 LT1137A 3-Driver/5-Receiver RS232 Transceiver w/Shutdown  
 LT1138A 5-Driver/3-Receiver RS232 Transceiver w/Shutdown  
 LT1139A 4-Driver/4-Receiver RS232 Transceiver w/Shutdown  
 LT1140A 5-Driver/3-Receiver RS232 Transceiver w/o Charge Pump  
 LT1141A 3-Driver/5-Receiver RS232 Transceiver w/o Charge Pump

# LT1130A/LT1140A Series

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                             |                              |                                      |                |
|-----------------------------|------------------------------|--------------------------------------|----------------|
| Supply Voltage ( $V_{CC}$ ) | 6V                           | Short-Circuit Duration               |                |
| $V^+$                       | 13.2V                        | $V^+$                                | 30 sec         |
| $V^-$ (Note 7)              | -13.2V                       | $V^-$                                | 30 sec         |
| Input Voltage               |                              | Driver Output                        | Indefinite     |
| Driver                      | $V^-$ to $V^+$               | Receiver Output                      | Indefinite     |
| Receiver                    | -30V to 30V                  | Operating Temperature Range          |                |
| On/Off Pin                  | -0.3V to 12V                 | LT113XAC/LT114XAC                    | 0°C to 70°C    |
| Driver Disable Pin          | -0.3V to ( $V_{CC} + 0.3V$ ) | LT113XAI/LT114XAI                    | -40° to 85°C   |
| Output Voltage              |                              | Storage Temperature Range            | -65°C to 150°C |
| Driver                      | -30V to 30V                  | Lead Temperature (Soldering, 10 sec) | 300°C          |
| Receiver                    | -0.3V to ( $V_{CC} + 0.3V$ ) |                                      |                |

## PRODUCT SELECTION TABLE

| Part Number | Power Supply Voltages* | Shutdown | Driver Disable | Drivers | Receivers | External Components |
|-------------|------------------------|----------|----------------|---------|-----------|---------------------|
| LT1130A     | 5                      | No       | No             | 5       | 5         | 4 Capacitors        |
| LT1131A     | 5                      | Yes      | Yes            | 5       | 4         | 4 Capacitors        |
| LT1132A     | 5                      | No       | No             | 5       | 3         | 4 Capacitors        |
| LT1133A**   | 5                      | No       | No             | 3       | 5         | 4 Capacitors        |
| LT1134A     | 5                      | No       | No             | 4       | 4         | 4 Capacitors        |
| LT1135A     | 5, 12, -12             | No       | No             | 5       | 3         | None                |
| LT1136A     | 5                      | Yes      | Yes            | 4       | 5         | 4 Capacitors        |
| LT1137A**   | 5                      | Yes      | Yes            | 3       | 5         | 4 Capacitors        |
| LT1138A     | 5                      | Yes      | Yes            | 5       | 3         | 4 Capacitors        |
| LT1139A     | 5, 12                  | Yes      | No             | 4       | 4         | 2 Capacitors        |
| LT1140A     | 5, 12, -12             | Yes      | Yes            | 5       | 3         | None                |
| LT1141A**   | 5, 12, -12             | Yes      | Yes            | 3       | 5         | None                |

\*The LT1130A, LT1131A, LT1132A, LT1134A, LT1136A, LT1137A and LT1138A can operate with 5V and 12V supplies and two external capacitors.

\*\*Meets  $\pm 15kV$  ESD air gap discharge and  $\pm 8kV$  contact methods per IEC-1000-4-2.

## PACKAGE/ORDER INFORMATION

| 5-DRIVER/5-RECEIVER                                                                                                                                                                                                                                                      | ORDER PART NUMBER                               | 5-DRIVER/4-RECEIVER WITH SHUTDOWN                                                                                                                                                                                                                                        | ORDER PART NUMBER                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| <p>TOP VIEW</p> <p>NW PACKAGE 28-LEAD PDIP<br/>SW PACKAGE 28-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 56^{\circ}C/W</math> (NW)<br/><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 68^{\circ}C/W</math> (SW)</p> | <p>LT1130ACNW<br/>LT1130ACSW<br/>LT1130AISW</p> | <p>TOP VIEW</p> <p>NW PACKAGE 28-LEAD PDIP<br/>SW PACKAGE 28-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 56^{\circ}C/W</math> (NW)<br/><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 68^{\circ}C/W</math> (SW)</p> | <p>LT1131ACNW<br/>LT1131ACSW</p> |

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                                                                  |                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <p><b>5-DRIVER/3-RECEIVER</b></p> <p>N PACKAGE<br/>24-LEAD PDIP</p> <p>SW PACKAGE<br/>24-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (SW)</p>                 | <p><b>ORDER PART NUMBER</b></p> <p>LT1132ACN<br/>LT1132ACSW<br/>LT1132AISW</p>               | <p><b>3-DRIVER/5-RECEIVER</b></p> <p>N PACKAGE<br/>24-LEAD PDIP</p> <p>SW PACKAGE<br/>24-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (SW)</p>                                                                                                                                                                 | <p><b>ORDER PART NUMBER</b></p> <p>LT1133ACN<br/>LT1133ACSW<br/>LT1133AISW</p>                                             |
| <p><b>4-DRIVER/4-RECEIVER</b></p> <p>N PACKAGE<br/>24-LEAD PDIP</p> <p>SW PACKAGE<br/>24-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (SW)</p>                 | <p><b>ORDER PART NUMBER</b></p> <p>LT1134ACN<br/>LT1134ACSW<br/>LT1134AIN<br/>LT1134AISW</p> | <p><b>5-DRIVER/3-RECEIVER WITHOUT CHARGE PUMP</b></p> <p>N PACKAGE<br/>20-LEAD PDIP</p> <p>SW PACKAGE<br/>20-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 79^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 85^{\circ}\text{C/W}</math> (SW)</p>                                                                                                                                             | <p><b>ORDER PART NUMBER</b></p> <p>LT1135ACN<br/>LT1135ACSW</p>                                                            |
| <p><b>4-DRIVER/5-RECEIVER WITH SHUTDOWN</b></p> <p>NW PACKAGE<br/>28-LEAD PDIP</p> <p>SW PACKAGE<br/>28-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (NW)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (SW)</p> | <p><b>ORDER PART NUMBER</b></p> <p>LT1136ACNW<br/>LT1136ACSW</p>                             | <p><b>3-DRIVER/5-RECEIVER WITH SHUTDOWN</b></p> <p>G PACKAGE<br/>28-LEAD PLASTIC SSOP</p> <p>NW PACKAGE<br/>28-LEAD PDIP</p> <p>SW PACKAGE<br/>28-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 96^{\circ}\text{C/W}</math> (G)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (NW)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (SW)</p> | <p><b>ORDER PART NUMBER</b></p> <p>LT1137ACG<br/>LT1137ACNW<br/>LT1137ACSW<br/>LT1137AIG<br/>LT1137AINW<br/>LT1137AISW</p> |

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                             |                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <p><b>5-DRIVER/3-RECEIVER WITH SHUTDOWN</b></p> <p>TOP VIEW</p> <p>G PACKAGE 28-LEAD PLASTIC SSOP    NW PACKAGE 28-LEAD PDIP    SW PACKAGE 28-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 96^{\circ}\text{C/W}</math> (G)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (NW)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (SW)</p> | <p>ORDER PART NUMBER</p> <p>LT1138ACG<br/>LT1138ACNW<br/>LT1138ACSW<br/>LT1138AIG</p> | <p><b>4-DRIVER/4-RECEIVER WITH SHUTDOWN WITH 12V AND 5V SUPPLIES</b></p> <p>TOP VIEW</p> <p>N PACKAGE 24-LEAD PDIP    SW PACKAGE 24-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (SW)</p> | <p>ORDER PART NUMBER</p> <p>LT1139ACN<br/>LT1139ACSW</p> |
| <p><b>5-DRIVER/3-RECEIVER WITH SHUTDOWN WITHOUT CHARGE PUMP</b></p> <p>TOP VIEW</p> <p>N PACKAGE 24-LEAD PDIP    SW PACKAGE 24-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (SW)</p>                                                                                                                       | <p>ORDER PART NUMBER</p> <p>LT1140ACN<br/>LT1140ACSW</p>                              | <p><b>3-DRIVER/5-RECEIVER WITH SHUTDOWN WITHOUT CHARGE PUMP</b></p> <p>TOP VIEW</p> <p>N PACKAGE 24-LEAD PDIP    SW PACKAGE 24-LEAD PLASTIC SO WIDE</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (SW)</p>      | <p>ORDER PART NUMBER</p> <p>LT1141ACN<br/>LT1141ACSW</p> |

Consult factory for Industrial and Military grade parts.

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^{\circ}\text{C}$ . (Note 2)

| PARAMETER                                                                                 | CONDITIONS                           | MIN | TYP  | MAX | UNITS |
|-------------------------------------------------------------------------------------------|--------------------------------------|-----|------|-----|-------|
| <b>Power Supply Generator</b>                                                             |                                      |     |      |     |       |
| $V^+$ Output                                                                              |                                      |     | 8.6  |     | V     |
| $V^-$ Output                                                                              |                                      |     | -7.8 |     | V     |
| $5V V_{CC}$ Supply Current: LT1130A, LT1131A, LT1132A, LT1133A, LT1134A, LT1136A, LT1138A | (Note 3)                             | ●   | 15   | 25  | mA    |
| $5V V_{CC}$ Supply Current: LT1135A, LT1140A, LT1141A                                     | (Note 3), $V^+ = 12V$ , $V^- = -12V$ | ●   | 8    | 15  | mA    |
| $5V V_{CC}$ Supply Current: LT1137A                                                       | (Note 3)                             | ●   | 12   | 17  | mA    |
| $5V V_{CC}$ Supply Current: LT1139A                                                       | (Note 3), $V^+ = 12V$                | ●   | 8    | 15  | mA    |
| $12V V^+$ Supply Current: LT1135A, LT1140A, LT1141A                                       | (Note 3), $V^- = -12V$               | ●   | 1    | 4   | mA    |
| $12V V^+$ Supply Current: LT1139A                                                         | (Note 3)                             | ●   | 6    | 10  | mA    |
| $-12V V^-$ Supply Current: LT1135A, LT1140A, LT1141A                                      | (Note 3) $V^+ = 12V$                 | ●   | 2    | 6   | mA    |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 2)

| PARAMETER                               | CONDITIONS                                                                                      |        | MIN | TYP        | MAX | UNITS                        |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|--------|-----|------------|-----|------------------------------|
| Supply Current when OFF ( $V_{CC}$ )    | Shutdown (Note 4)<br>Driver Disable                                                             | ●      |     | 1<br>4     | 10  | $\mu\text{A}$<br>$\text{mA}$ |
| Supply Rise Time<br>Shutdown to Turn-On | $C_1, C_2, C^+, C^- = 1.0\mu\text{F}$<br>$C^+, C^- = 0.1\mu\text{F}, C_1, C_2 = 0.2\mu\text{F}$ |        |     | 2.0<br>0.2 |     | $\text{ms}$<br>$\text{ms}$   |
| ON/OFF Pin Thresholds                   | Input Low Level (Device Shut Down)<br>Input High Level (Device Enabled)                         | ●<br>● | 2.4 | 1.4<br>1.4 | 0.8 | $\text{V}$<br>$\text{V}$     |
| ON/OFF Pin Current                      | $0\text{V} \leq V_{\text{ON/OFF}} \leq 5\text{V}$                                               | ●      | -15 |            | 80  | $\mu\text{A}$                |
| DRIVER DISABLE Pin Thresholds           | Input Low Level (Drivers Enabled)<br>Input High Level (Drivers Disabled)                        | ●<br>● | 2.4 | 1.4<br>1.4 | 0.8 | $\text{V}$<br>$\text{V}$     |
| DRIVER DISABLE Pin Current              | $0\text{V} \leq V_{\text{DRIVER DISABLE}} \leq 5\text{V}$                                       | ●      | -10 |            | 500 | $\mu\text{A}$                |
| Oscillator Frequency                    |                                                                                                 |        |     | 130        |     | $\text{kHz}$                 |

## Any Driver

|                              |                                                                                                          |        |            |             |            |                                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------|--------|------------|-------------|------------|--------------------------------------------------|
| Output Voltage Swing         | Load = 3k to GND Positive<br>Negative                                                                    | ●<br>● | 5          | 7.3<br>-6.5 | -5         | $\text{V}$<br>$\text{V}$                         |
| Logic Input Voltage Level    | Input Low Level ( $V_{\text{OUT}} = \text{High}$ )<br>Input High Level ( $V_{\text{OUT}} = \text{Low}$ ) | ●<br>● | 2          | 1.4<br>1.4  | 0.8        | $\text{V}$<br>$\text{V}$                         |
| Logic Input Current          | $0.8\text{V} \leq V_{\text{IN}} \leq 2\text{V}$                                                          | ●      |            | 5           | 20         | $\mu\text{A}$                                    |
| Output Short-Circuit Current | $V_{\text{OUT}} = 0\text{V}$                                                                             |        | $\pm 9$    | $\pm 17$    |            | $\text{mA}$                                      |
| Output Leakage Current       | Shutdown $V_{\text{OUT}} = \pm 30\text{V}$ (Note 4)                                                      | ●      |            | 10          | 100        | $\mu\text{A}$                                    |
| Data Rate                    | $R_L = 3\text{k}, C_L = 2500\text{pF}$<br>$R_L = 3\text{k}, C_L = 1000\text{pF}$                         |        | 120<br>250 |             |            | $\text{kbaud}$<br>$\text{kbaud}$                 |
| Slew Rate                    | $R_L = 3\text{k}, C_L = 51\text{pF}$<br>$R_L = 3\text{k}, C_L = 2500\text{pF}$ (Note 8)                  |        |            | 15<br>6     | 30         | $\text{V}/\mu\text{s}$<br>$\text{V}/\mu\text{s}$ |
| Propagation Delay            | Output Transition $t_{\text{HL}}$ High to Low (Note 5)<br>Output Transition $t_{\text{LH}}$ Low to High  |        |            | 0.6<br>0.5  | 1.3<br>1.3 | $\mu\text{s}$<br>$\mu\text{s}$                   |

## Any Receiver

|                              |                                                                                                                                |        |     |            |            |                            |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------|-----|------------|------------|----------------------------|
| Input Voltage Thresholds     | Input Low Threshold ( $V_{\text{OUT}} = \text{High}$ )<br>Input High Threshold ( $V_{\text{OUT}} = \text{Low}$ )               | ●<br>● | 0.8 | 1.3<br>1.7 | 2.4        | $\text{V}$<br>$\text{V}$   |
| Hysteresis                   |                                                                                                                                | ●      | 0.1 | 0.4        | 1          | $\text{V}$                 |
| Input Resistance             | $-10\text{V} < V_{\text{IN}} < 10\text{V}$                                                                                     |        | 3   | 5          | 7          | $\text{k}\Omega$           |
| Output Voltage               | Output Low, $I_{\text{OUT}} = -1.6\text{mA}$<br>Output High, $I_{\text{OUT}} = 160\mu\text{A}$ ( $V_{\text{CC}} = 5\text{V}$ ) | ●<br>● | 3.5 | 0.2<br>4.2 | 0.4        | $\text{V}$<br>$\text{V}$   |
| Output Leakage Current       | Shutdown (Note 4) $0 \leq V_{\text{OUT}} \leq V_{\text{CC}}$                                                                   | ●      |     | 1          | 10         | $\mu\text{A}$              |
| Output Short-Circuit Current | Sinking Current, $V_{\text{OUT}} = V_{\text{CC}}$<br>Sourcing Current, $V_{\text{OUT}} = 0\text{V}$                            |        | 10  | -20<br>20  | -10        | $\text{mA}$<br>$\text{mA}$ |
| Propagation Delay            | Output Transition $t_{\text{HL}}$ High to Low (Note 6)<br>Output Transition $t_{\text{LH}}$ Low to High                        |        |     | 250<br>350 | 600<br>600 | $\text{ns}$<br>$\text{ns}$ |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** Testing done at  $V_{\text{CC}} = 5\text{V}$  and  $V_{\text{ON/OFF}} = 3\text{V}$ .

**Note 3:** Supply current is measured with driver and receiver outputs unloaded and the driver inputs tied high.

**Note 4:** Supply current and driver leakage current measurements in shutdown are performed with  $V_{\text{ON/OFF}} = 0.1\text{V}$ . Supply current measurements using DRIVER DISABLE are performed with  $V_{\text{DRIVER DISABLE}} = 3\text{V}$ . For LT1135, LT1139, LT1140 and LT1141 with 12V supplies,  $V_{\text{OUT}}$  leakage is  $200\mu\text{A}$  for  $V_{\text{OUT}}$  forced to  $\pm 25\text{V}$ .







**Note 5:** For driver delay measurements,  $R_L = 3\text{k}$  and  $C_L = 51\text{pF}$ . Trigger points are set between the driver's input logic threshold and the output transition to the zero crossing ( $t_{\text{HL}} = 1.4\text{V}$  to  $0\text{V}$  and  $t_{\text{LH}} = 1.4\text{V}$  to  $0\text{V}$ ).

**Note 6:** For receiver delay measurements,  $C_L = 51\text{pF}$ . Trigger points are set between the receiver's input logic threshold and the output transition to standard TTL/CMOS logic threshold ( $t_{\text{HL}} = 1.3\text{V}$  to  $2.4\text{V}$  and  $t_{\text{LH}} = 1.7\text{V}$  to  $0.8\text{V}$ ).

**Note 7:** For LT1133A/LT1137A, absolute maximum externally applied  $V^- = -6.5\text{V}$ . Internal charge pump will drive this pin to a higher negative voltage.

**Note 8:** For LT1137A,  $4\text{V}/\mu\text{s}$  minimum.

TYPICAL PERFORMANCE CHARACTERISTICS

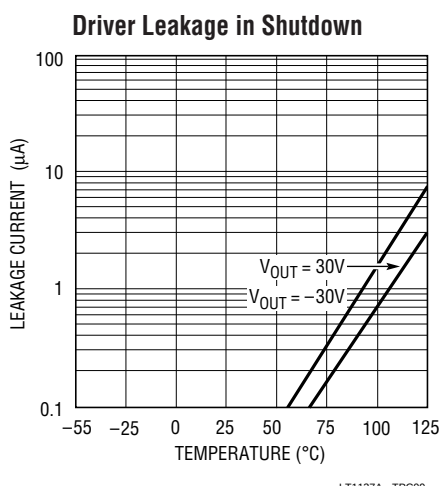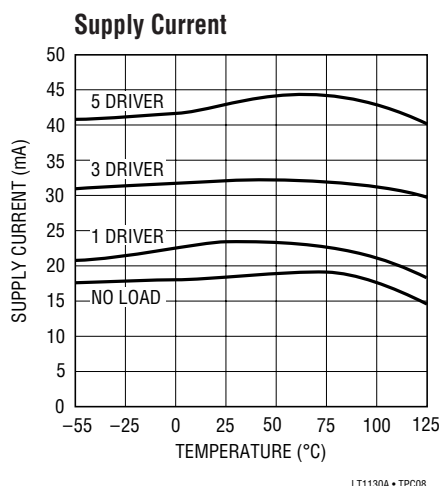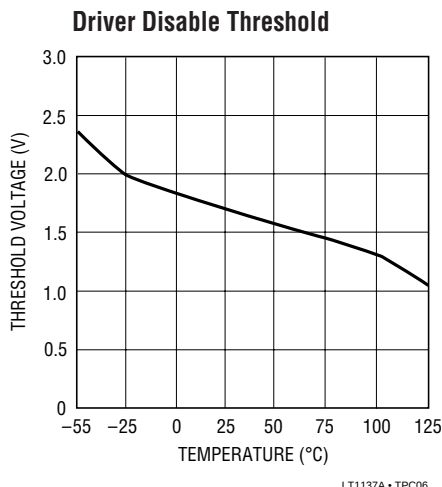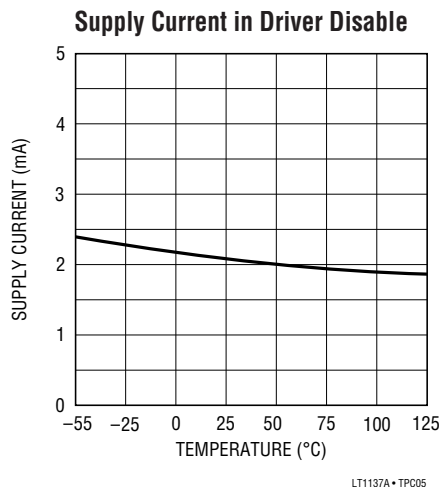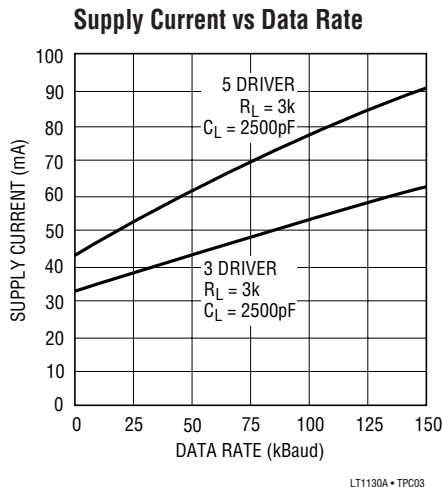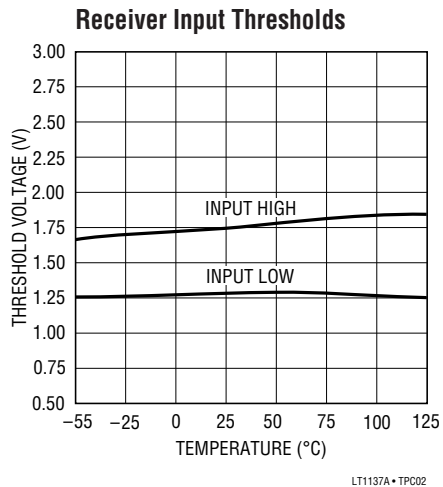

## TYPICAL PERFORMANCE CHARACTERISTICS



## PIN FUNCTIONS

**V<sub>CC</sub>**: 5V Input Supply Pin. Supply current drops to zero in the shutdown mode. This pin should be decoupled with a 0.1µF ceramic capacitor close to the package pin. Insufficient supply bypassing can result in low output drive levels and erratic charge pump operation.

**GND**: Ground Pin.

**ON/OFF**: Control the operation mode of the device and is TTL/CMOS compatible. A logic low puts the device in the shutdown mode which reduces input supply current to zero and places all of the drivers and receivers in high impedance state. A logic high fully enables the transceiver.

**DRIVER DISABLE**: This pin provides an alternate control for the charge pump and RS232 drivers. A logic high on this pin shuts down the charge pump and places all drivers

in a high impedance state. Receivers remain active under these conditions. Floating the DRIVER DISABLE pin or driving it to a logic low level fully enables the transceiver. A logic low on the ON/OFF pin supersedes the state of the DRIVER DISABLE pin. Supply current drops to 4mA when in driver disable mode.

**V<sup>+</sup>**: Positive Supply Output (RS232 Drivers).  $V^+ \approx 2V_{CC} - 1.5V$ . This pin requires an external charge storage capacitor  $C \geq 1.0\mu F$ , tied to ground or  $V_{CC}$ . Larger value capacitors may be used to reduce supply ripple. With multiple transceivers, the  $V^+$  and  $V^-$  pins may be paralleled into common capacitors. For large numbers of transceivers, increasing the size of the shared common storage capacitors is recommended to reduce ripple.




## TYPICAL APPLICATIONS

### Operation Using 5V and 12V Power Supplies



LT1130A • TA03

### Typical Mouse Driving Application

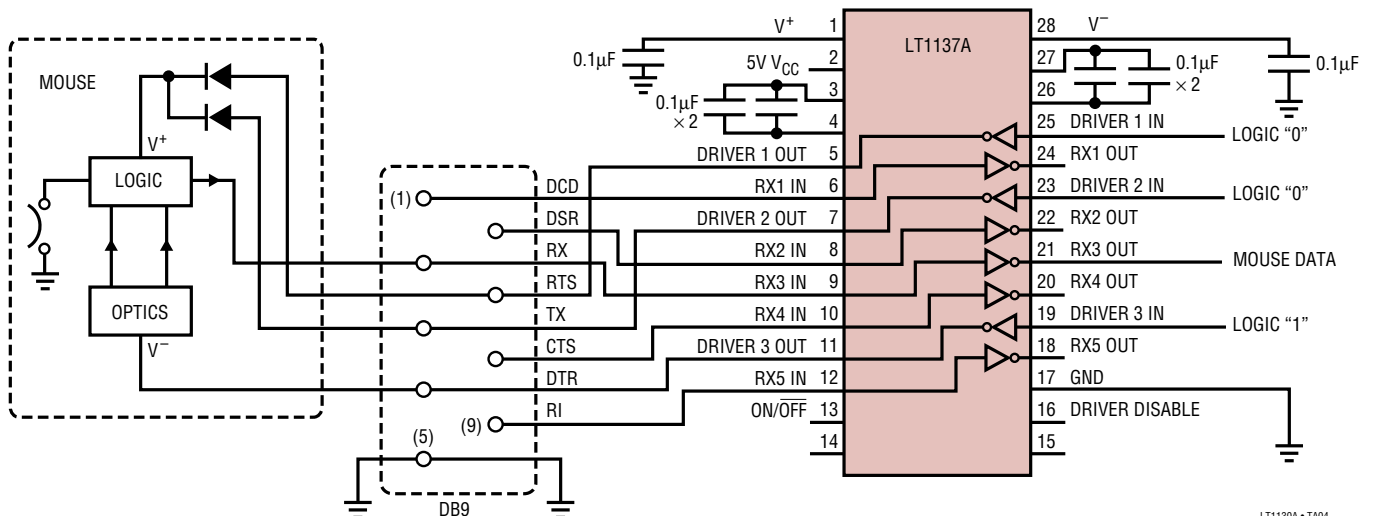

LT1130A • TA04

## PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

### G Package 28-Lead Plastic SSOP (0.209) (LTC DWG # 05-08-1640)



### N Package 20-Lead PDIP (Narrow 0.300) (LTC DWG # 05-08-1510)



### N Package 24-Lead PDIP (Narrow 0.300) (LTC DWG # 05-08-1510)




## PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

### NW Package 28-Lead PDIP (Wide 0.600) (LTC DWG # 05-08-1520)



\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

### SW Package 20-Lead Plastic Small Outline (Wide 0.300) (LTC DWG # 05-08-1620)

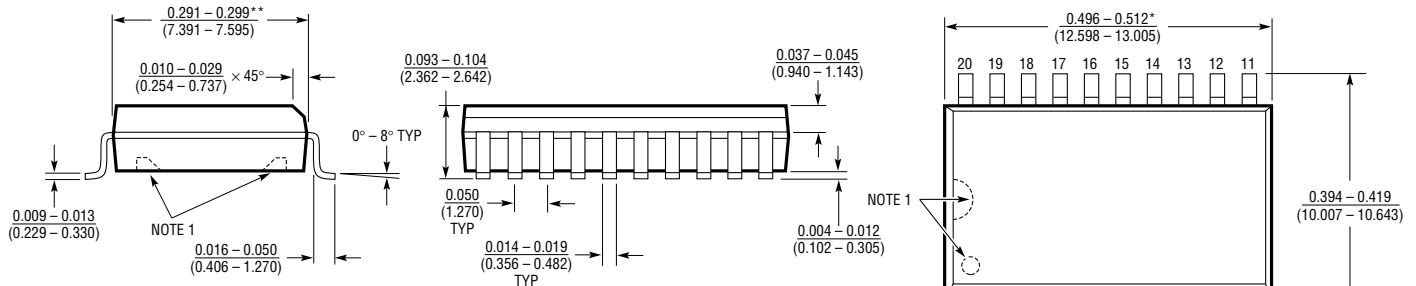

NOTE:  
1. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.  
THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS  
\*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE  
\*\*DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

### SW Package 24-Lead Plastic Small Outline (Wide 0.300) (LTC DWG # 05-08-1620)



NOTE:  
1. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.  
THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS  
\*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE  
\*\*DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

# LT1130A/LT1140A Series


## PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

### SW Package 28-Lead Plastic Small Outline (Wide 0.300) (LTC DWG # 05-08-1620)



## TYPICAL APPLICATION

### Sharing Power Supply Generator with a Second Transceiver

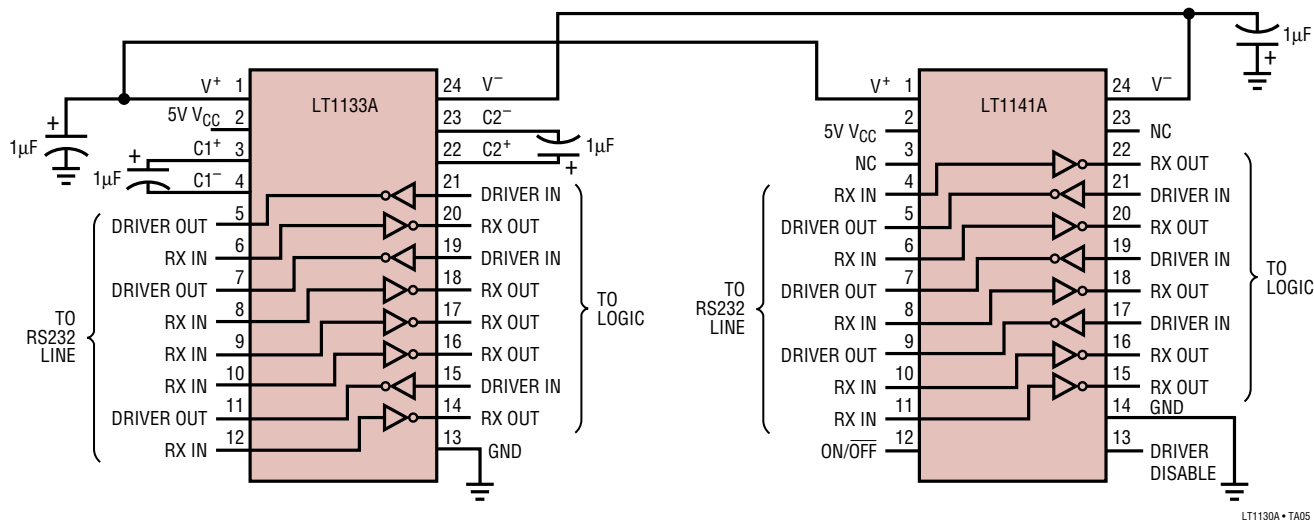

## RELATED PARTS

| PART NUMBER     | DESCRIPTION                            | COMMENTS                               |
|-----------------|----------------------------------------|----------------------------------------|
| LT1180A/LT1181A | 2-Driver/2-Receiver RS232 Transceivers | Single 5V Supply with 0.1μF Capacitors |
| LT1237          | 3-Driver/5-Receiver RS232 Transceiver  | Lower Power Upgrade for LT1137A        |
| LTC1327         | 3-Driver/5-Receiver RS562 Transceiver  | 3.3V Operation                         |
| LTC1337         | 3-Driver/5-Receiver RS232 Transceiver  | Ultralow Power for DTE Applications    |
| LTC1338         | 5-Driver/3-Receiver RS232 Transceiver  | Ultralow Power for DCE Applications    |
| LTC1348         | 3-Driver/5-Receiver RS232 Transceiver  | 3.3V to 5V Operation                   |