

5

4

3

2

1






SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf $\pm$ 20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1G Ω

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

PCB Layout, Component side

PCB thickness 1,6 mm

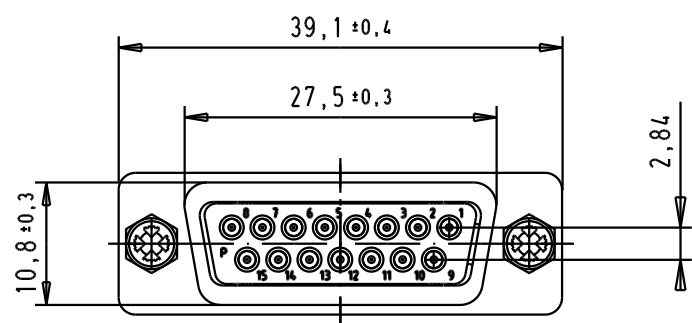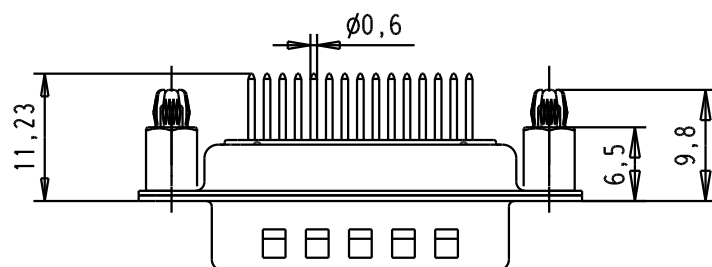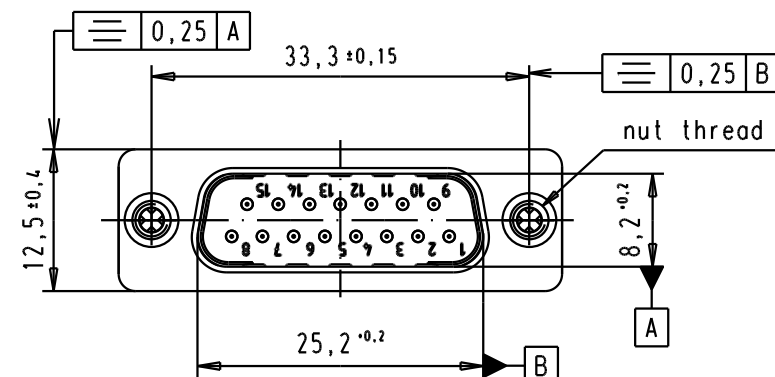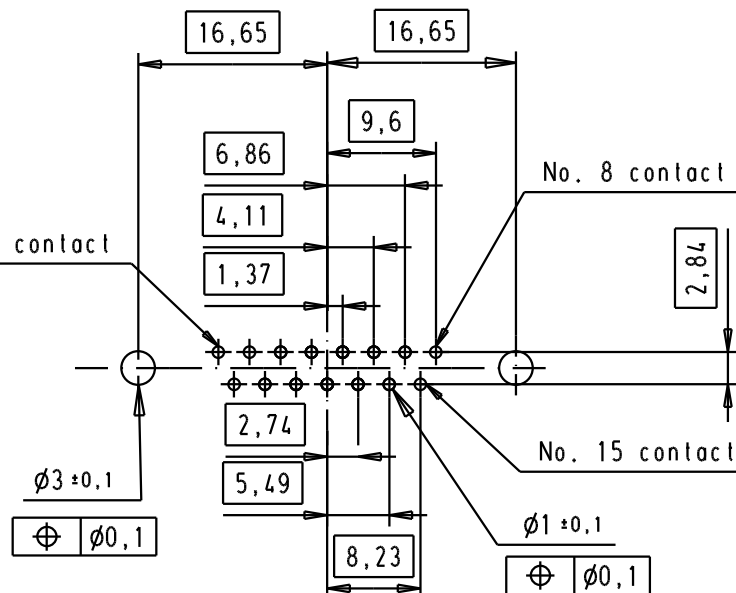


Dat. Name

Detail. 8-JUL-02 CV

Insp.

Stand.

All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, straight,
15 Poles, solder pins, tin
plated shell with dimples,
spacer nuts and board-locks

Mo?Mstab/
Scale

1.5:1

09642227236

M3

33079

29/08/05

JMDR

09642227235

UNC 4-40

31058

8-JUL-02

CV

Part number

Nut thread

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris



TB 0964222723x

Sub.

Blatt/ Page

2
3